



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2022

Hardware Availability: Apr-2022

Software Availability: Nov-2021

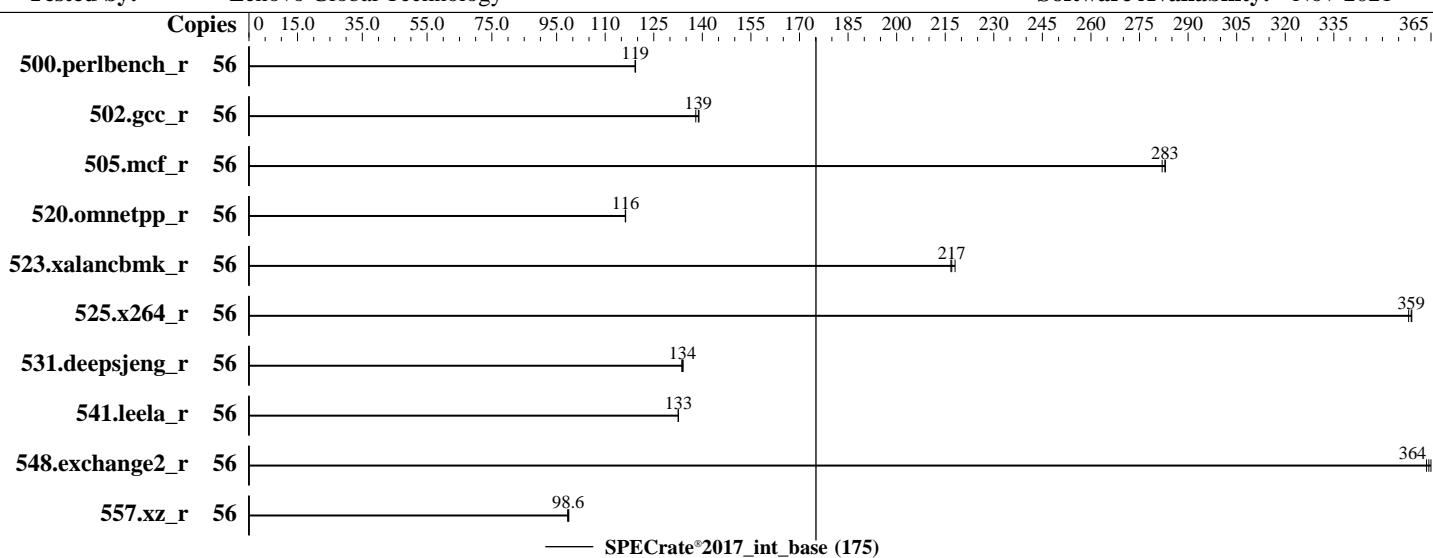

Hardware

CPU Name: Intel Xeon Gold 6330N
Max MHz: 3400
Nominal: 2200
Enabled: 28 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 42 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
Storage: 1 x 960 GB SATA SSD
Other: None

OS:

Red Hat Enterprise Linux 8.5
(Ootpa)

Compiler:

Kernel 4.18.0-348.el8.x86_64
C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler
Classic Build 20201112 for Linux

Parallel:

No

Firmware:

Lenovo BIOS Version CME104I 1.01 released Mar-2022

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

Not Applicable

Other:

None

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	56	748	119	747	119	747	119							
502.gcc_r	56	571	139	575	138	571	139							
505.mcf_r	56	321	282	320	283	320	283							
520.omnetpp_r	56	632	116	632	116	632	116							
523.xalancbmk_r	56	272	217	273	217	271	218							
525.x264_r	56	273	359	273	359	274	358							
531.deepsjeng_r	56	480	134	479	134	479	134							
541.leela_r	56	699	133	700	133	699	133							
548.exchange2_r	56	403	364	402	365	403	364							
557.xz_r	56	615	98.4	612	98.8	613	98.6							

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic202
    1.1-revB/lib/ia32:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

General Notes (Continued)

numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enabled

```
Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Thu May 19 19:57:13 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6330N CPU @ 2.20GHz
  1 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 56
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               56
On-line CPU(s) list: 0-55
Thread(s) per core:  2
Core(s) per socket:  28
Socket(s):            1
NUMA node(s):         2
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
CPU family:           6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Platform Notes (Continued)

Model: 106
Model name: Intel(R) Xeon(R) Gold 6330N CPU @ 2.20GHz
BIOS Model name: Intel(R) Xeon(R) Gold 6330N CPU @ 2.20GHz
Stepping: 6
CPU MHz: 2200.000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 43008K
NUMA node0 CPU(s): 0-13,28-41
NUMA node1 CPU(s): 14-27,42-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavexc xgetbv1 xsaves cqmq_llc cqmq_occur_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 43008 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 28 29 30 31 32 33 34 35 36 37 38 39 40 41
node 0 size: 128571 MB
node 0 free: 127993 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 42 43 44 45 46 47 48 49 50 51 52 53 54 55
node 1 size: 129015 MB
node 1 free: 128584 MB
node distances:
node 0 1
0: 10 11
1: 11 10

From /proc/meminfo
MemTotal: 263768692 kB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

```
/sbin/tuned-adm active
  Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.5 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.5"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos
```

```
uname -a:
Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 May 19 19:56

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   819G   26G  793G   4%  /home
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor:           Lenovo
Product:          ThinkEdge SE450
Product Family:   ThinkSystem
Serial:           1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2666
```

BIOS:

```
BIOS Vendor:       Lenovo
BIOS Version:      CME104I-1.01
BIOS Date:         03/17/2022
BIOS Revision:     1.1
Firmware Revision: 1.10
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++    | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      | 541.leela_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 548.exchange2_r(base)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Compiler Version Notes (Continued)

Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkEdge SE450
(2.20 GHz, Intel Xeon Gold 6330N)

SPECrate®2017_int_base = 175

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-J.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-J.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-19 07:57:13-0400.

Report generated on 2022-06-07 15:45:52 by CPU2017 PDF formatter v6442.

Originally published on 2022-06-07.