



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

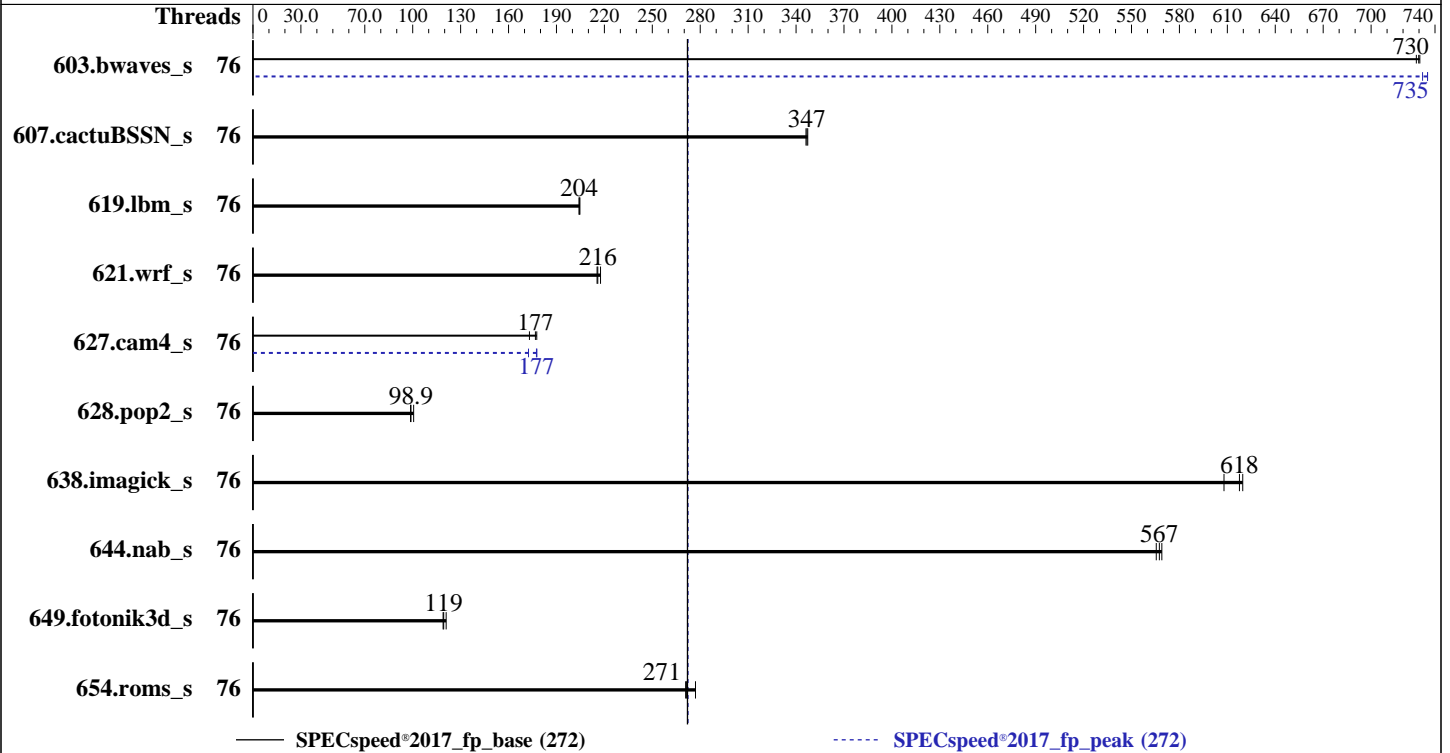

### Hardware

CPU Name: Intel Xeon Platinum 8368Q  
 Max MHz: 3700  
 Nominal: 2600  
 Enabled: 76 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 57 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 1 TB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa)  
 4.18.0-305.25.1.el8\_4.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 0802 released Apr-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECSpeed®2017\_fp\_base = 272

SPECSpeed®2017\_fp\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	76	<b>80.8</b>	<b>730</b>	80.8	731	81.0	728	76	<b>80.2</b>	<b>735</b>	80.2	735	80.6	732
607.cactuBSSN_s	76	<b>48.1</b>	<b>347</b>	48.2	346	48.0	347	76	<b>48.1</b>	<b>347</b>	48.2	346	48.0	347
619.lbm_s	76	<b>25.6</b>	<b>204</b>	25.7	204	25.6	205	76	<b>25.6</b>	<b>204</b>	25.7	204	25.6	205
621.wrf_s	76	61.4	215	60.8	218	<b>61.3</b>	<b>216</b>	76	61.4	215	60.8	218	<b>61.3</b>	<b>216</b>
627.cam4_s	76	<b>50.1</b>	<b>177</b>	51.2	173	49.9	178	76	51.4	173	49.9	178	<b>49.9</b>	<b>177</b>
628.pop2_s	76	<b>120</b>	<b>98.9</b>	120	98.6	118	101	76	<b>120</b>	<b>98.9</b>	120	98.6	118	101
638.imagick_s	76	<b>23.4</b>	<b>618</b>	23.3	620	23.7	608	76	<b>23.4</b>	<b>618</b>	23.3	620	23.7	608
644.nab_s	76	<b>30.8</b>	<b>567</b>	30.9	566	30.7	569	76	<b>30.8</b>	<b>567</b>	30.9	566	30.7	569
649.fotonik3d_s	76	75.4	121	<b>76.3</b>	<b>119</b>	76.6	119	76	75.4	121	<b>76.3</b>	<b>119</b>	76.6	119
654.roms_s	76	<b>58.0</b>	<b>271</b>	58.1	271	56.8	277	76	<b>58.0</b>	<b>271</b>	58.1	271	56.8	277

SPECSpeed®2017\_fp\_base = **272**

SPECSpeed®2017\_fp\_peak = **272**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/ic22u1/lib/intel64:/home/ic22u1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

### General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

Hyper-Threading = Disable

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /home/ic22ul/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Oct 20 13:36:18 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz

2 "physical id"s (chips)

76 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 38

siblings : 38

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 76

On-line CPU(s) list: 0-75

Thread(s) per core: 1

Core(s) per socket: 38

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

### Platform Notes (Continued)

```

BIOS Vendor ID: Intel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
BIOS Model name: Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
Stepping: 6
CPU MHz: 820.212
CPU max MHz: 3700.0000
CPU min MHz: 800.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 58368K
NUMA node0 CPU(s): 0-37
NUMA node1 CPU(s): 38-75
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 58368 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37
node 0 size: 515626 MB
node 0 free: 509588 MB
node 1 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
63 64 65 66 67 68 69 70 71 72 73 74 75
node 1 size: 516085 MB
node 1 free: 512173 MB
node distances:

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

### Platform Notes (Continued)

```
node    0    1
0:     10   20
1:     20   10
```

From /proc/meminfo

```
MemTotal:      1056472512 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
```

redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.4:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-305.25.1.el8_4.x86_64 #1 SMP Mon Oct 18 14:34:11
EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

### Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected  
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Oct 20 05:25

SPEC is set to: /home/ic22u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	878G	125G	754G	15%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E10-RS12
Product Family: Server
Serial:          012345678901

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

```

BIOS:
  BIOS Vendor:      American Megatrends Inc.
  BIOS Version:     0802
  BIOS Date:        04/29/2022
  BIOS Revision:    8.2

```

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECSpeed®2017\_fp\_base = 272

SPECSpeed®2017\_fp\_peak = 272

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Oct-2022

Hardware Availability: Apr-2022

Software Availability: May-2022

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

### C benchmarks:

icx

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E10(Z12PP-D32) Server System  
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECspeed®2017\_fp\_base = 272

SPECspeed®2017\_fp\_peak = 272

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Oct-2022

**Hardware Availability:** Apr-2022

**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

627.cam4\_s (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.2.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.2022-10-12.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-20 13:36:18-0400.

Report generated on 2022-12-07 10:43:19 by CPU2017 PDF formatter v6442.

Originally published on 2022-12-06.