



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion


SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Dec-2022  
Hardware Availability: Jan-2023  
Software Availability: May-2022

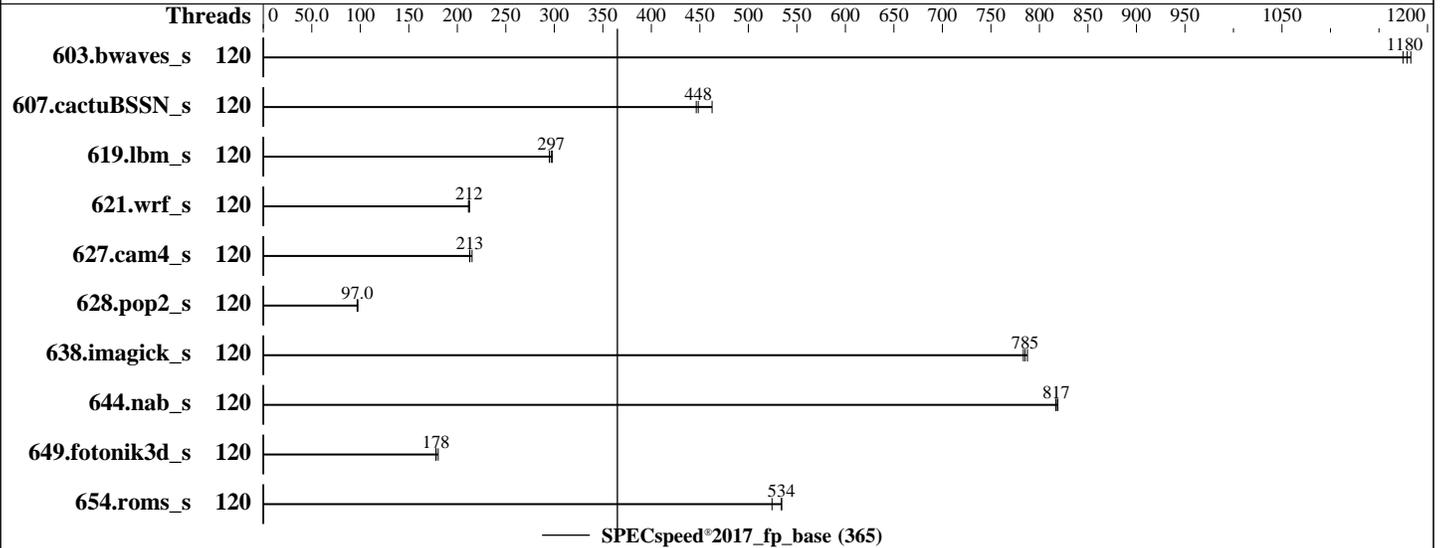

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 120 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 1920 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
5.14.0-70.13.1.el9\_0.x86\_64  
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2022.1 of Intel Fortran Compiler  
for Linux;  
Parallel: Yes  
Firmware: Version 2.00.35 Released Nov-2022  
File System: xfs  
System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: OS set to prefer performance at the cost of  
additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Dec-2022  
Hardware Availability: Jan-2023  
Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	120	49.9	1180	50.2	1170	<b>50.0</b>	<b>1180</b>							
607.cactuBSSN_s	120	<b>37.2</b>	<b>448</b>	37.4	446	36.0	463							
619.lbm_s	120	<b>17.7</b>	<b>297</b>	17.6	298	17.8	295							
621.wrf_s	120	62.5	211	<b>62.3</b>	<b>212</b>	62.3	212							
627.cam4_s	120	41.2	215	41.7	213	<b>41.6</b>	<b>213</b>							
628.pop2_s	120	<b>122</b>	<b>97.0</b>	123	96.7	122	97.5							
638.imagick_s	120	18.3	788	<b>18.4</b>	<b>785</b>	18.4	783							
644.nab_s	120	21.4	817	<b>21.4</b>	<b>817</b>	21.3	819							
649.fotonik3d_s	120	50.6	180	<b>51.2</b>	<b>178</b>	51.2	178							
654.roms_s	120	29.5	534	<b>29.5</b>	<b>534</b>	30.0	524							

SPECspeed®2017\_fp\_base = 365

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/spec2017-2022.1/lib/intel64:/spec2017-2022.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

### General Notes (Continued)

sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Load Balance  
Enable LP [Global] Set to Single LP

Sysinfo program /spec2017-2022.1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Mon Dec 5 21:49:25 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8490H  
2 "physical id"s (chips)  
120 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 60  
siblings : 60  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59

From lscpu from util-linux 2.37.4:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 120  
On-line CPU(s) list: 0-119  
Vendor ID: GenuineIntel  
BIOS Vendor ID: Intel(R) Corporation  
Model name: Intel(R) Xeon(R) Platinum 8490H  
BIOS Model name: Intel(R) Xeon(R) Platinum 8490H  
CPU family: 6  
Model: 143  
Thread(s) per core: 1  
Core(s) per socket: 60

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Dec-2022  
Hardware Availability: Jan-2023  
Software Availability: May-2022

### Platform Notes (Continued)

```

Socket(s):                2
Stepping:                 6
Frequency boost:         enabled
CPU max MHz:              1901.0000
CPU min MHz:              800.0000
BogoMIPS:                 3800.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fstrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:          VT-x
L1d cache:               5.6 MiB (120 instances)
L1i cache:               3.8 MiB (120 instances)
L2 cache:                 240 MiB (120 instances)
L3 cache:                 225 MiB (2 instances)
NUMA node(s):            2
NUMA node0 CPU(s):       0-59
NUMA node1 CPU(s):       60-119
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

### Platform Notes (Continued)

L3 112.5M 225M 15 Unified 3 122880 1 64

```
/proc/cpuinfo cache data
cache size : 115200 KB
```

```
From numactl --hardware
```

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 2 nodes (0-1)
```

```
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59
```

```
node 0 size: 257060 MB
```

```
node 0 free: 254034 MB
```

```
node 1 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84
85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109
110 111 112 113 114 115 116 117 118 119
```

```
node 1 size: 258024 MB
```

```
node 1 free: 257269 MB
```

```
node distances:
```

```
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
```

```
MemTotal: 527447180 kB
```

```
HugePages_Total: 0
```

```
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
```

```
It seems that tuned daemon is not running, preset profile is not activated.
```

```
Preset profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
```

```
NAME="Red Hat Enterprise Linux"
```

```
VERSION="9.0 (Plow)"
```

```
ID="rhel"
```

```
ID_LIKE="fedora"
```

```
VERSION_ID="9.0"
```

```
PLATFORM_ID="platform:el9"
```

```
PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
```

```
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
```

```
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

### Platform Notes (Continued)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:9::baseos

uname -a:

```
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Dec 5 21:18

SPEC is set to: /spec2017-2022.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	420G	142G	278G	34%	/

From /sys/devices/virtual/dmi/id

Product: 2288H V7  
Product Family: Eagle Stream

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMCG88AEBRA107N 32 GB 2 rank 4800

BIOS:

BIOS Vendor:  
BIOS Version: 2.00.35  
BIOS Date: 11/30/2022  
BIOS Revision: 0.35

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Dec-2022  
Hardware Availability: Jan-2023  
Software Availability: May-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECspeed®2017\_fp\_base = 365

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Dec-2022  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-05 21:49:24-0500.  
Report generated on 2023-01-10 19:01:12 by CPU2017 PDF formatter v6442.  
Originally published on 2023-01-10.