



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

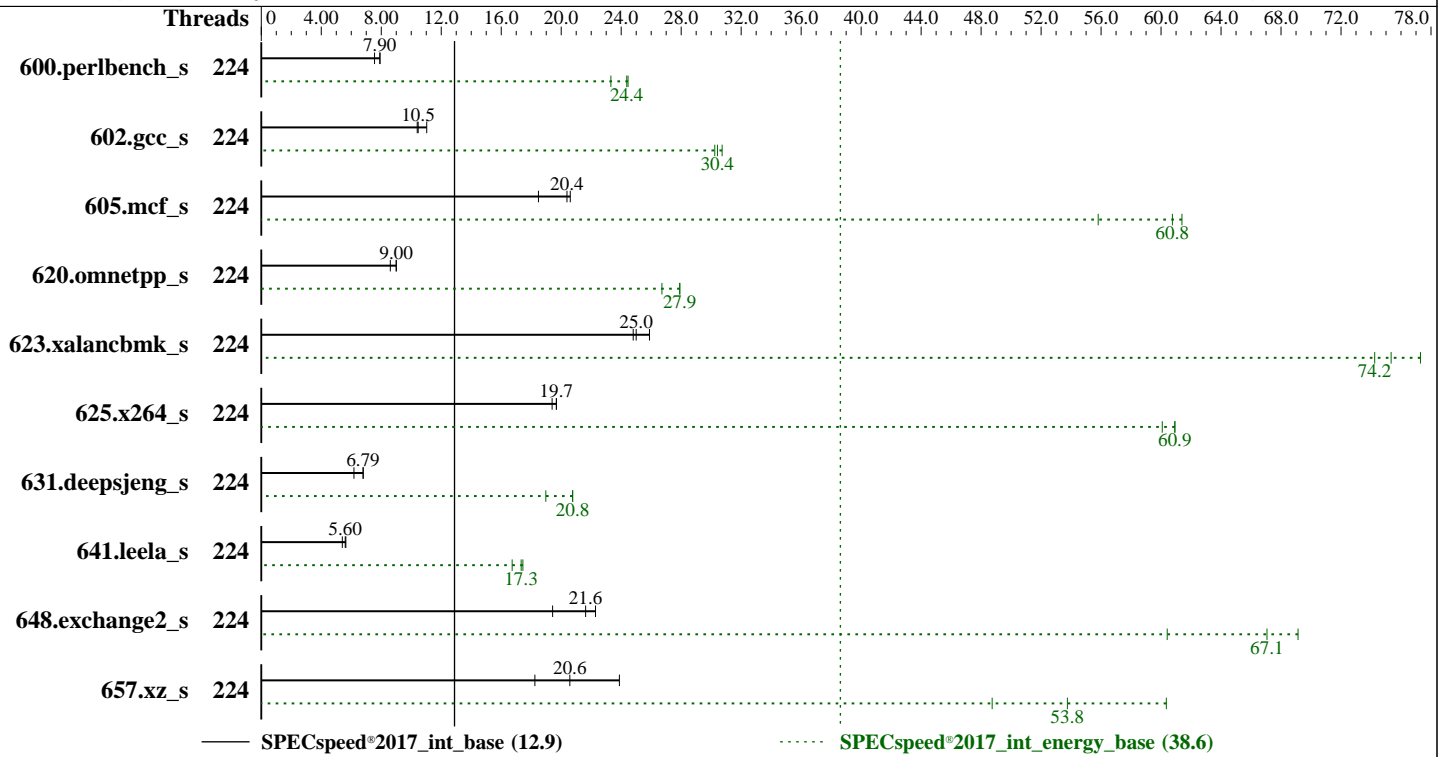

Hardware

CPU Name: Intel Xeon Platinum 8480+
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x SATA SSD, 1.92TB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for
 D3983-A1x. Released Mar-2023
 tested as V1.0.0.0 R0.22.1 for D3983-A1x Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to balance power and performance

Power

Max. Power (W): 1016.1
 Idle Power (W): 343.48
 Min. Temperature (C): 26.88
 Elevation (m): 11

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base = 12.9
 SPECspeed®2017_int_energy_base = 38.6
 SPECspeed®2017_int_peak = Not Run
 SPECspeed®2017_int_energy_peak = Not Run

CPU2017 License: 19
 Test Sponsor: Fujitsu
 Tested by: Fujitsu

Test Date: Dec-2022
 Hardware Availability: Mar-2023
 Software Availability: Jun-2022

Power (Continued)

Line Standard: 200 V / 50 Hz / 1 phase / 2 wires
 Provisioning: Line-powered

Power Settings

Management FW: Version 2.00u for D3933-A1x of Fujitsu BMC
 Firmware
 Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 2200 W (non-redundant)
 Details: Standard power supply part of base unit
 S26113-E646-V50-1
 Backplane: 12 x 3.5inch HDD back plan
 Other Storage: Embedded SATA Controller
 Storage Model #s: S26361-F5776-E192
 NICs Installed: 1 x Intel I210-T1 @ 1 Gb
 NICs Enabled (FW/OS): 1 / 1
 NICs Connected/Speed: 1 @ 1 Gb
 Other HW Model #s: None

Power Analyzer

Power Analyzer: 10.26.120.180:8888
 Hardware Vendor: Hioki
 Model: Hioki PW3336:1-Channel
 Serial Number: 170213562
 Input Connection: USB via USB-Serial CH340
 Metrology Institute: NICT
 Calibration By: HIOKI E.E. CORPORATION
 Calibration Label: H06400088
 Calibration Date: 28-Jun-2022
 PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)
 Setup Description: Connected to PSU 1
 Current Ranges Used: 10A
 Voltage Range Used: 300V

Temperature Meter

Temperature Meter: 10.26.120.180:8889
 Hardware Vendor: Digi International Inc.
 Model: DigiWATCHPORT_H
 Serial Number: W 640 45112
 Input Connection: USB
 PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)
 Setup Description: 5 mm in front of SUT main air intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	224	224	7.92	78.7	24.5	351	358	225	7.90	79.0	24.4	352	368	235	7.55	82.6	23.3	351	367
602.gcc_s	224	361	11.0	141	30.7	390	442	381	10.5	142	30.4	374	441	383	10.4	143	30.2	374	441
605.mcf_s	224	255	18.5	92.3	55.8	361	431	229	20.6	83.9	61.4	366	431	232	20.4	84.8	60.8	366	433
620.omnetpp_s	224	181	9.00	63.6	27.9	351	352	190	8.60	66.4	26.7	350	352	181	9.00	63.6	27.9	351	352
623.xalancbmk_s	224	54.7	25.9	19.9	77.3	364	436	57.1	24.8	20.4	75.3	357	434	56.7	25.0	20.7	74.2	366	434
625.x264_s	224	89.6	19.7	31.5	60.9	351	353	89.6	19.7	31.5	60.9	351	353	91.0	19.4	31.9	60.1	351	353
631.deepsjeng_s	224	211	6.79	75.0	20.8	356	421	211	6.79	75.0	20.8	356	419	232	6.18	82.1	19.0	354	419
641.leela_s	224	303	5.64	106	17.4	350	351	316	5.40	110	16.7	350	351	305	5.60	107	17.3	350	350
648.exchange2_s	224	151	19.4	53.0	60.4	350	352	136	21.6	47.7	67.1	351	352	132	22.3	46.3	69.1	351	351
657.xz_s	224	300	20.6	125	53.8	417	1020	259	23.9	112	60.4	431	1000	339	18.2	138	48.7	408	943

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_energy_base = 38.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu-1.1.8/lib/intel64:/home/Benchmark/speccpu-1.1.8/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
RdCur for XPT Prefetch = Enable
Adjacent Cache Line Prefetch = Disabled
Package C State limit = C0
SNC (Sub NUMA) = Enable SNC2
HWPM Support = Disabled

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

Platform Notes (Continued)

AVX P1 = Level2
 CPU Performance Boost = Aggressive
 FAN Control = Full
 Optimized Power Mode = Enable

Sysinfo program /home/Benchmark/speccpu-1.1.8/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
 running on localhost Sun Dec 4 00:59:04 2022

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8480+
 2 "physical id"s (chips)
224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 56
siblings       : 112
physical 0:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
physical 1:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                224
On-line CPU(s) list:   0-223
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8480+
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    56
Socket(s):             2
Stepping:              8
Frequency boost:       enabled
CPU max MHz:           1301.0000
CPU min MHz:           800.0000
BogoMIPS:              2600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```

xsavvec xgetbvl xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd
fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fpl6 amx_tile flush_lld
arch_capabilities
Virtualization: VT-x
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-27,112-139
NUMA node1 CPU(s): 28-55,140-167
NUMA node2 CPU(s): 56-83,168-195
NUMA node3 CPU(s): 84-111,196-223
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

/proc/cpuinfo cache data
cache size : 107520 KB

From numactl --hardware

```

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133
134 135 136 137 138 139
node 0 size: 257614 MB
node 0 free: 256088 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158
159 160 161 162 163 164 165 166 167
node 1 size: 257999 MB
node 1 free: 257255 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186
187 188 189 190 191 192 193 194 195
node 2 size: 258033 MB
node 2 free: 257523 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

Platform Notes (Continued)

```
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211
212 213 214 215 216 217 218 219 220 221 222 223
node 3 size: 257665 MB
node 3 free: 257108 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10
```

```
From /proc/meminfo
MemTotal: 1056064412 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
ondemand
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

```
uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222/lp) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

run-level 3 Dec 4 00:57

```
SPEC is set to: /home/Benchmark/speccpu-1.1.8
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 1.8T 68G 1.7T 4% /
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2022
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor:      FUJITSU
Product:     PRIMERGY RX2540 M7
Product Family: SERVER
Serial:      EWCExxxxxxx
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 10x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
  6x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

```
BIOS:
 BIOS Vendor:      FUJITSU
 BIOS Version:     V1.0.0.0 R0.22.1 for D3983-Alx
 BIOS Date:        12/01/2022
 BIOS Revision:    0.22
 Firmware Revision: 2.0
```

(End of data from sysinfo program)

Compiler Version Notes

```
-----
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
-----
C++    | 620.omnetpp_s(base) 623.xalanbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
-----
Fortran | 648.exchange2_s(base)
-----
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
 icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base =	12.9
SPECspeed®2017_int_energy_base =	38.6
SPECspeed®2017_int_peak =	Not Run
SPECspeed®2017_int_energy_peak =	Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8480+,
2.00GHz

SPECspeed®2017_int_base = 12.9

SPECspeed®2017_int_energy_base = 38.6

SPECspeed®2017_int_peak = Not Run

SPECspeed®2017_int_energy_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2022

Hardware Availability: Mar-2023

Software Availability: Jun-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2023-01-10.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2023-01-10.xml

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-03 10:59:03-0500.

Report generated on 2024-01-29 17:15:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-10.