



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573


Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

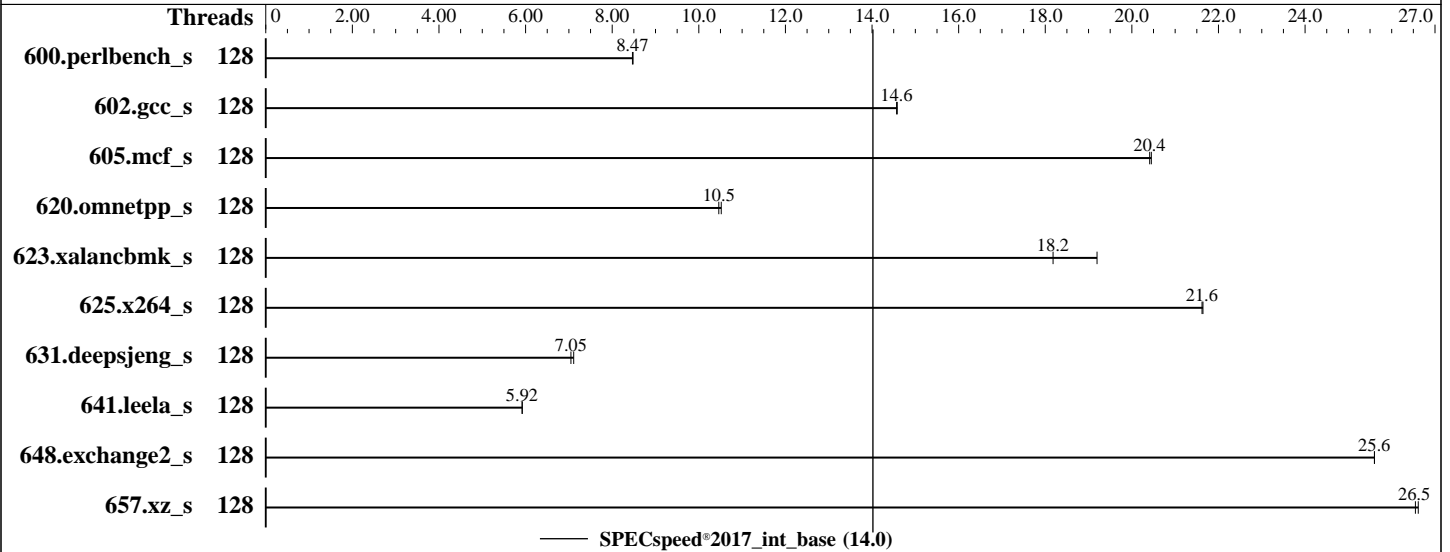

Hardware

CPU Name: AMD EPYC 9554
 Max MHz: 3750
 Nominal: 3100
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 5.15.0-46-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.0.2 released Oct-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2022
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	<u>210</u>	<u>8.47</u>	209	8.48									
602.gcc_s	128	273	14.6	<u>273</u>	<u>14.6</u>									
605.mcf_s	128	231	20.4	<u>231</u>	<u>20.4</u>									
620.omnetpp_s	128	<u>156</u>	<u>10.5</u>	155	10.5									
623.xalancbmk_s	128	73.8	19.2	<u>77.9</u>	<u>18.2</u>									
625.x264_s	128	81.5	21.6	<u>81.6</u>	<u>21.6</u>									
631.deepsjeng_s	128	<u>203</u>	<u>7.05</u>	202	7.11									
641.leela_s	128	<u>288</u>	<u>5.92</u>	288	5.92									
648.exchange2_s	128	115	25.6	<u>115</u>	<u>25.6</u>									
657.xz_s	128	232	26.6	<u>233</u>	<u>26.5</u>									

SPECspeed®2017_int_base = 14.0

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
Logical Processor : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 4
L3 Cache as NUMA Domain : Enabled

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM Ll Link
Power Management : Disabled
Determinism Slider : Power Determinism
Algorithm Performance
Boost Disable (ApbDis) : Enabled

```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-Blb/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on amd-sut Sun Nov 6 00:30:13 2022

```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9554 64-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 64

```

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

```

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

From lscpu from util-linux 2.37.2:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9554 64-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 2

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```

Stepping: 1
Frequency boost: enabled
CPU max MHz: 3764.0000
CPU min MHz: 400.0000
BogoMIPS: 6202.15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization: AMD-V
L1d cache: 4 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 32-39
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 48-55
NUMA node4 CPU(s): 24-31
NUMA node5 CPU(s): 56-63
NUMA node6 CPU(s): 8-15
NUMA node7 CPU(s): 40-47
NUMA node8 CPU(s): 64-71
NUMA node9 CPU(s): 96-103
NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 112-119
NUMA node12 CPU(s): 88-95
NUMA node13 CPU(s): 120-127
NUMA node14 CPU(s): 72-79
NUMA node15 CPU(s): 104-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 96311 MB
node 0 free: 96031 MB
node 1 cpus: 32 33 34 35 36 37 38 39
node 1 size: 96764 MB
node 1 free: 96515 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 96765 MB
node 2 free: 96558 MB
node 3 cpus: 48 49 50 51 52 53 54 55
node 3 size: 96764 MB
node 3 free: 96563 MB
node 4 cpus: 24 25 26 27 28 29 30 31
node 4 size: 96730 MB
node 4 free: 96526 MB
node 5 cpus: 56 57 58 59 60 61 62 63
node 5 size: 96764 MB
node 5 free: 96569 MB
node 6 cpus: 8 9 10 11 12 13 14 15
node 6 size: 96765 MB
node 6 free: 96573 MB
node 7 cpus: 40 41 42 43 44 45 46 47
node 7 size: 96748 MB
node 7 free: 96551 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 96765 MB
node 8 free: 96524 MB
node 9 cpus: 96 97 98 99 100 101 102 103
node 9 size: 96764 MB
node 9 free: 96567 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 96765 MB
node 10 free: 96556 MB
node 11 cpus: 112 113 114 115 116 117 118 119
node 11 size: 96764 MB
node 11 free: 96432 MB
node 12 cpus: 88 89 90 91 92 93 94 95
node 12 size: 96765 MB
node 12 free: 93041 MB
node 13 cpus: 120 121 122 123 124 125 126 127
node 13 size: 96764 MB
node 13 free: 96563 MB
node 14 cpus: 72 73 74 75 76 77 78 79
node 14 size: 96765 MB
node 14 free: 96444 MB
node 15 cpus: 104 105 106 107 108 109 110 111
node 15 size: 96739 MB
node 15 free: 96495 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
 3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
 4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
 5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
 6:  12 12 12 12 12 10 11 32 32 32 32 32 32 32 32 32
 7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
 8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
 9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10:  32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11:  32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12:  32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13:  32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14:  32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15:  32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

From /proc/meminfo

MemTotal: 1584860720 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

/sbin/tuned-adm active
  Current active profile: latency-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

/usr/bin/lsb_release -d
  Ubuntu 22.04.1 LTS

From /etc/*release* /etc/*version*
  debian_version: bookworm/sid
  os-release:
    PRETTY_NAME="Ubuntu 22.04.1 LTS"
    NAME="Ubuntu"
    VERSION_ID="22.04"
    VERSION="22.04.1 LTS (Jammy Jellyfish)"
    VERSION_CODENAME=jammy
    ID=ubuntu
    ID_LIKE=debian
    HOME_URL="https://www.ubuntu.com/"

uname -a:
  Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64
  x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
mmio_stale_data:                         Not affected
retbleed:                                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
  Bypass disabled via prctl and
  seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs
  barriers and __user pointer
  sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Retpolines, IBPB:
  conditional, IBRS_FW, STIBP:
  disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Nov 6 00:27

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	3.4G	122G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
 Product: PowerEdge R7625
 Product Family: PowerEdge
 Serial: 1234567

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800

BIOS:

BIOS Vendor: Dell Inc.
 BIOS Version: 1.0.2
 BIOS Date: 10/17/2022
 BIOS Revision: 1.0

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)  
      | 625.x264_s(base) 657.xz_s(base)  
-----
```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```
=====  
C++   | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)  
     | 641.leela_s(base)  
-----
```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2022
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Fortran | 648.exchange2_s(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.0

PowerEdge R7625 (AMD EPYC 9554 64-Core Processor)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-05 20:30:13-0400.

Report generated on 2023-02-01 18:18:33 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.