



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573


Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

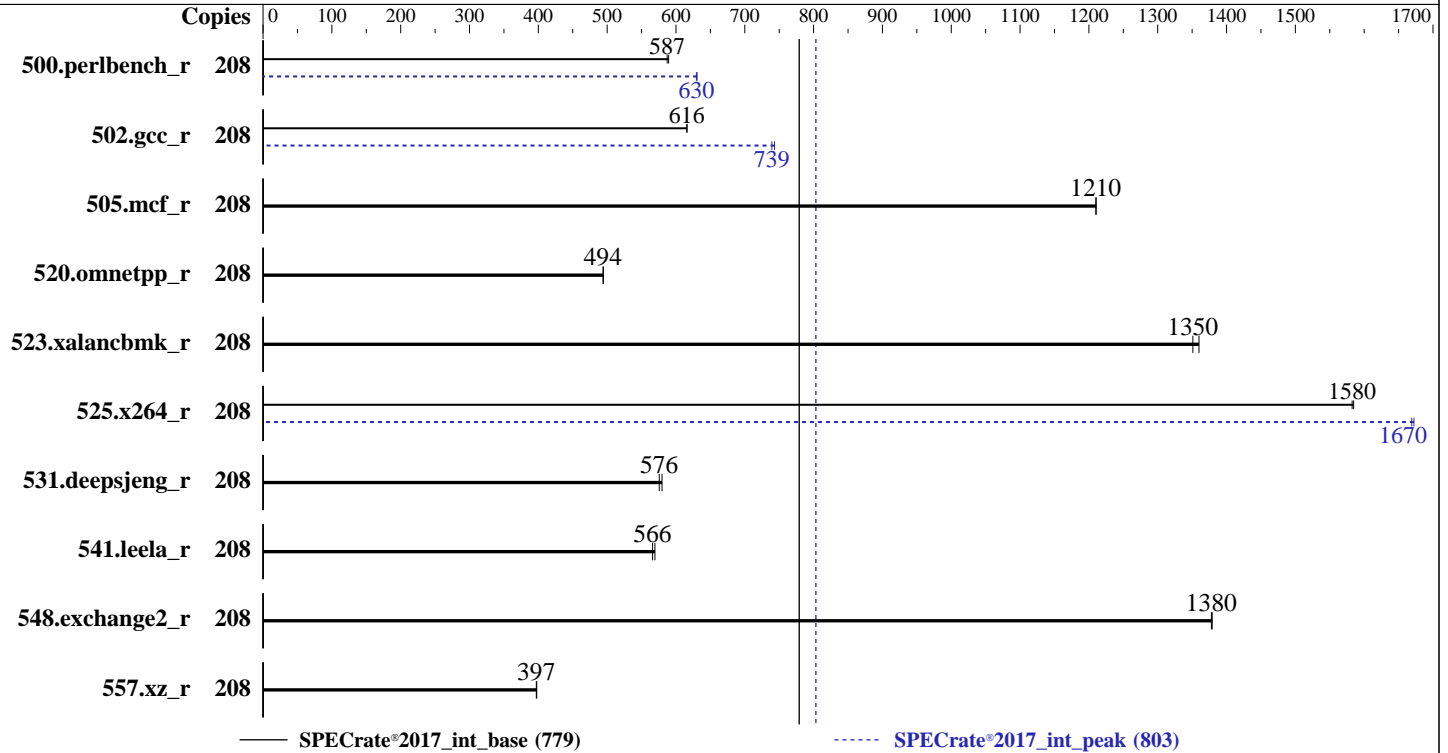

### Hardware

CPU Name: Intel Xeon Platinum 8470N  
 Max MHz: 3600  
 Nominal: 1700  
 Enabled: 104 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 97.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 1.0.1 released Dec-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: Jun-2022

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	562	589	<b>564</b>	<b>587</b>			208	525	631	<b>526</b>	<b>630</b>		
502.gcc_r	208	478	616	<b>478</b>	<b>616</b>			208	396	743	<b>398</b>	<b>739</b>		
505.mcf_r	208	<b>278</b>	<b>1210</b>	278	1210			208	<b>278</b>	<b>1210</b>	278	1210		
520.omnetpp_r	208	552	494	<b>552</b>	<b>494</b>			208	552	494	<b>552</b>	<b>494</b>		
523.xalancbmk_r	208	162	1360	<b>163</b>	<b>1350</b>			208	162	1360	<b>163</b>	<b>1350</b>		
525.x264_r	208	<b>230</b>	<b>1580</b>	230	1580			208	<b>218</b>	<b>1670</b>	218	1670		
531.deepsjeng_r	208	<b>414</b>	<b>576</b>	411	580			208	<b>414</b>	<b>576</b>	411	580		
541.leela_r	208	605	569	<b>609</b>	<b>566</b>			208	605	569	<b>609</b>	<b>566</b>		
548.exchange2_r	208	395	1380	<b>395</b>	<b>1380</b>			208	395	1380	<b>395</b>	<b>1380</b>		
557.xz_r	208	565	398	<b>566</b>	<b>397</b>			208	565	398	<b>566</b>	<b>397</b>		

SPECrate®2017\_int\_base = 779

SPECrate®2017\_int\_peak = 803

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-32"
MALLOCONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Red Hat Enterprise Linux 8.4  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

ADDC Setting : Disabled  
 DIMM Self Healing on  
 Uncorrectable Memory Error : Disabled  
 Virtualization Technology : Disabled  
 Sub NUMA Cluster : 4-way Clustering  
 DCU Streamer Prefetcher : Disabled  
 LLC Prefetch : Disabled  
 Dead Line LLC Alloc : Disabled  
 Optimizer Mode : Enabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 CLE : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Fri Jan 13 20:18:38 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: Jun-2022

## Platform Notes (Continued)

- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. sysctl
- 15. /sys/kernel/mm/transparent\_hugepage
- 16. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 17. OS release
- 18. Disk information
- 19. /sys/devices/virtual/dmi/id
- 20. dmidecode
- 21. BIOS

```
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
20:18:38 up 36 min, 1 user, load average: 0.48, 0.15, 0.27
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1      -                19:50    1:02   1.11s  0.00s /bin/bash ./dell-norun-specrate.sh
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124406
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124406
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_int\_base = 779

## PowerEdge MX760c (Intel Xeon Platinum 8470N)

## SPECrate®2017\_int\_peak = 803

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Jun-2022

### Platform Notes (Continued)

```

/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=104 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
--output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=104 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
--tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8470N
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 52
siblings       : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:       Little Endian
CPU(s):           208
On-line CPU(s) list: 0-207
Vendor ID:        GenuineIntel
Model name:       Intel(R) Xeon(R) Platinum 8470N
CPU family:       6
Model:           143
Thread(s) per core: 2
Core(s) per socket: 52
Socket(s):        2
Stepping:         8
BogoMIPS:         3400.00
Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                  clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                  lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                  nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_int\_base = 779

### PowerEdge MX760c (Intel Xeon Platinum 8470N)

### SPECrate®2017\_int\_peak = 803

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Jun-2022

## Platform Notes (Continued)

ds\_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2  
x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm  
abm 3dnowprefetch cpuid\_fault ept cat\_l3 cat\_l2 cdp\_l3 invpcid\_single  
cdp\_l2 ssbd mba ibrs ibpb stibp ibrs\_enhanced fsgsbase tsc\_adjust bmi1 hle  
avx2 smep bmi2 erms invpcid rtm cqm rdt\_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl  
xsaveopt xsavec xgetbv1 xsavec cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local split\_lock\_detect avx\_vnni avx512\_bf16 wbnoinvd dtherm ida  
arat pln pts avx512vbmi umip pku ospke waitpkg avx512\_vbmi2 gfni vaes  
vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid  
bus\_lock\_detect cldemote movdiri movdir64b enqcmd fsrm md\_clear serialize  
tsxldtrk pconfig arch\_lbr avx512\_fp16 amx\_tile flush\_lld arch\_capabilities

L1d cache: 4.9 MiB (104 instances)  
L1i cache: 3.3 MiB (104 instances)  
L2 cache: 208 MiB (104 instances)  
L3 cache: 195 MiB (2 instances)  
NUMA node(s): 8  
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,104,108,112,116,120,124,128,132,136,140,144,148,152  
NUMA node1 CPU(s): 52,56,60,64,68,72,76,80,84,88,92,96,100,156,160,164,168,172,176,180,184,188,192,196,200,204  
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,106,110,114,118,122,126,130,134,138,142,146,150,154  
NUMA node3 CPU(s): 54,58,62,66,70,74,78,82,86,90,94,98,102,158,162,166,170,174,178,182,186,190,194,198,202,206  
NUMA node4 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,105,109,113,117,121,125,129,133,137,141,145,149,153  
NUMA node5 CPU(s): 53,57,61,65,69,73,77,81,85,89,93,97,101,157,161,165,169,173,177,181,185,189,193,197,201,205  
NUMA node6 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,107,111,115,119,123,127,131,135,139,143,147,151,155  
NUMA node7 CPU(s): 55,59,63,67,71,75,79,83,87,91,95,99,103,159,163,167,171,175,179,183,187,191,195,199,203,207  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	97.5M	195M	15	Unified	3	106496	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,104,108,112,116,120,124,128,132,136,140,144,148,152  
node 0 size: 128397 MB  
node 0 free: 127592 MB  
node 1 cpus: 52,56,60,64,68,72,76,80,84,88,92,96,100,156,160,164,168,172,176,180,184,188,192,196,200,204  
node 1 size: 129017 MB  
node 1 free: 128834 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Platform Notes (Continued)

```

node 2 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,106,110,114,118,122,126,130,134,138,142,146,150,154
node 2 size: 129017 MB
node 2 free: 128705 MB
node 3 cpus: 54,58,62,66,70,74,78,82,86,90,94,98,102,158,162,166,170,174,178,182,186,190,194,198,202,206
node 3 size: 129017 MB
node 3 free: 128773 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,105,109,113,117,121,125,129,133,137,141,145,149,153
node 4 size: 129017 MB
node 4 free: 120876 MB
node 5 cpus: 53,57,61,65,69,73,77,81,85,89,93,97,101,157,161,165,169,173,177,181,185,189,193,197,201,205
node 5 size: 128982 MB
node 5 free: 128671 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,107,111,115,119,123,127,131,135,139,143,147,151,155
node 6 size: 129017 MB
node 6 free: 128710 MB
node 7 cpus: 55,59,63,67,71,75,79,83,87,91,95,99,103,159,163,167,171,175,179,183,187,191,195,199,203,207
node 7 size: 128656 MB
node 7 free: 128165 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 21 21 21 21
 1: 12 10 12 12 21 21 21 21
 2: 12 12 10 12 21 21 21 21
 3: 12 12 12 10 21 21 21 21
 4: 21 21 21 21 10 12 12 12
 5: 21 21 21 21 12 10 12 12
 6: 21 21 21 21 12 12 10 12
 7: 21 21 21 21 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:      1055870632 kB

```

```

10. who -r
    run-level 3 Jan 13 19:42

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target    Status
    multi-user        running

```

```

12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         apparmor auditd cron firewalld getty@ haveged irqbalance issue-generator kbdsettings kdump
                    kdump-early lvm2-monitor postfix purge-kernels rollback sshd wicked wickedd-auto4
                    wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled        blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                    ebttables grub2-once haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs
                    nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
    indirect        wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=4068cb7a-41a3-4eea-ab49-bc6f15bea24c
    splash=silent

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

```
mitigations=auto
quiet
security=apparmor
crashkernel=314M,high
crashkernel=72M,low
```

```
-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.7G 122G   3% /mnt/ramdisk
```

```
-----
19. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge MX760c
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: Jun-2022

## Platform Notes (Continued)

Product Family: PowerEdge  
Serial: SL6M701

### 20. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

12x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800  
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800  
3x 002C069D002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

### 21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.0.1  
BIOS Date: 12/27/2022  
BIOS Revision: 1.0

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate®2017\_int\_peak = 803

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate<sup>®</sup>2017\_int\_peak = 803

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemallocc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2017\_int\_base = 779

PowerEdge MX760c (Intel Xeon Platinum 8470N)

SPECrate<sup>®</sup>2017\_int\_peak = 803

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Jun-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2023-01-13 20:18:37-0500.

Report generated on 2024-01-29 17:20:59 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.