



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

## SPECrate®2017\_fp\_base = 336

## SPECrate®2017\_fp\_peak = 354

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

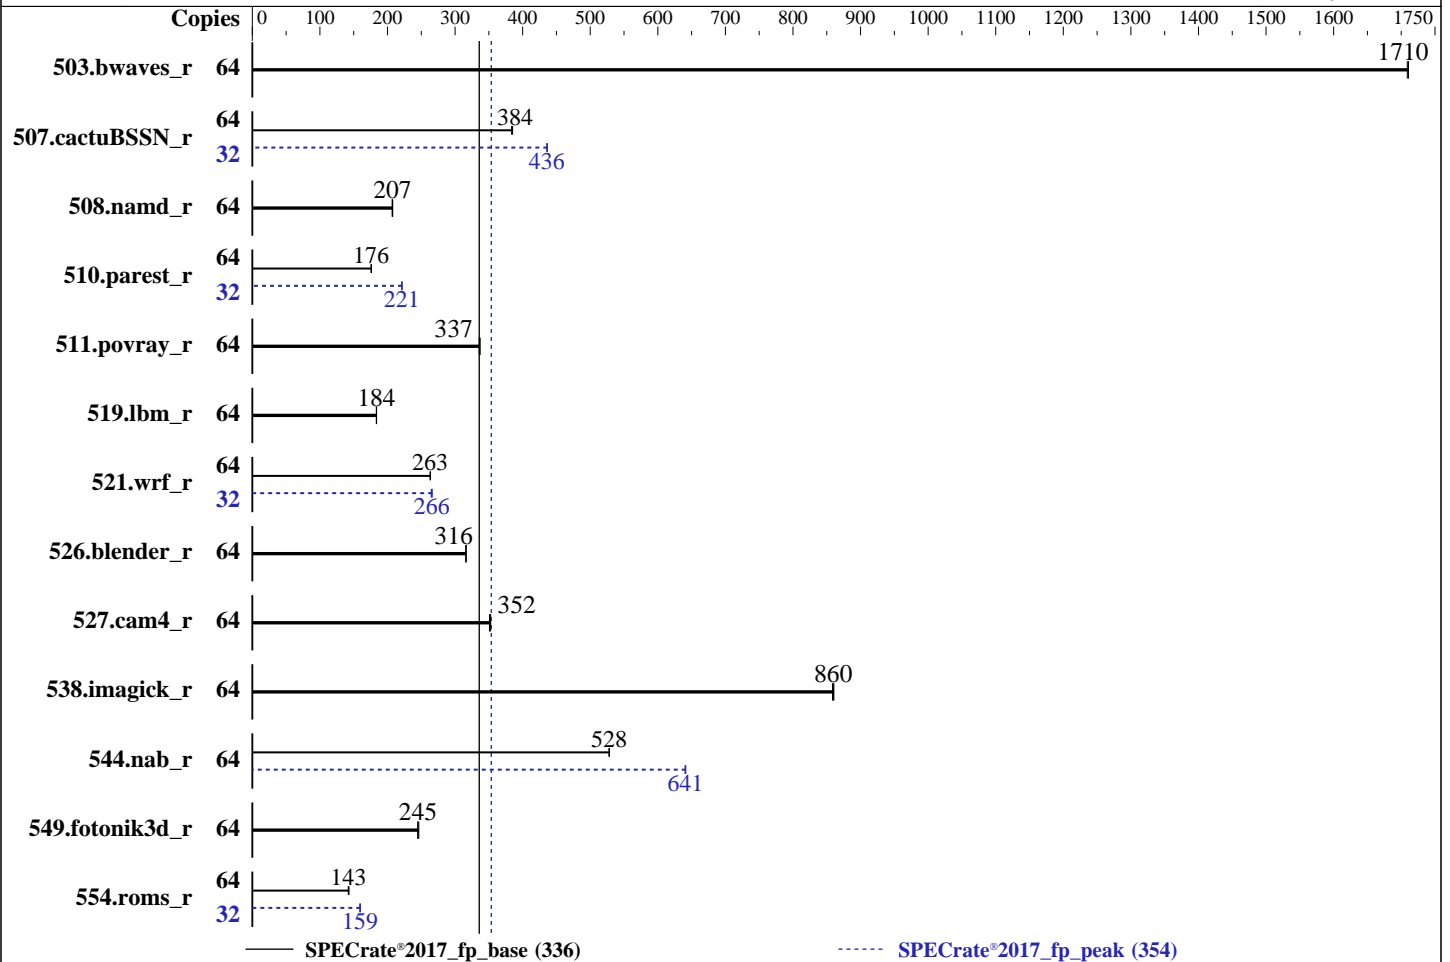

### Hardware

CPU Name: Intel Xeon Gold 6454S  
 Max MHz: 3400  
 Nominal: 2200  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.22 01/18/2023 released Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2023  
Hardware Availability: Jan-2023  
Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	375	1710	376	1710	<b>375</b>	<b>1710</b>	64	375	1710	376	1710	<b>375</b>	<b>1710</b>
507.cactuBSSN_r	64	<b>211</b>	<b>384</b>	210	385	211	384	32	92.9	436	92.8	437	<b>92.9</b>	<b>436</b>
508.namd_r	64	<b>293</b>	<b>207</b>	294	207	293	208	64	<b>293</b>	<b>207</b>	294	207	293	208
510.parest_r	64	<b>951</b>	<b>176</b>	953	176	949	176	32	378	221	<b>378</b>	<b>221</b>	378	221
511.povray_r	64	445	336	<b>444</b>	<b>337</b>	443	337	64	445	336	<b>444</b>	<b>337</b>	443	337
519.lbm_r	64	<b>367</b>	<b>184</b>	367	184	368	183	64	<b>367</b>	<b>184</b>	367	184	368	183
521.wrf_r	64	<b>544</b>	<b>263</b>	544	263	545	263	32	<b>270</b>	<b>266</b>	271	265	269	266
526.blender_r	64	309	316	308	316	<b>308</b>	<b>316</b>	64	309	316	308	316	<b>308</b>	<b>316</b>
527.cam4_r	64	319	351	317	353	<b>318</b>	<b>352</b>	64	319	351	317	353	<b>318</b>	<b>352</b>
538.imagick_r	64	185	861	185	858	<b>185</b>	<b>860</b>	64	185	861	185	858	<b>185</b>	<b>860</b>
544.nab_r	64	204	528	204	528	<b>204</b>	<b>528</b>	64	<b>168</b>	<b>641</b>	168	641	168	640
549.fotonik3d_r	64	1012	246	1019	245	<b>1017</b>	<b>245</b>	64	1012	246	1019	245	<b>1017</b>	<b>245</b>
554.roms_r	64	<b>714</b>	<b>143</b>	716	142	711	143	32	319	159	318	160	<b>319</b>	<b>159</b>

SPECrate®2017\_fp\_base = **336**

SPECrate®2017\_fp\_peak = **354**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
IRQ balance service was stopped using "systemctl stop irqbalance.service"  
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"  
perf-bias for all the CPUs is set using "cpupower set -b 0"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

**SPECrate®2017\_fp\_base = 336**

**SPECrate®2017\_fp\_peak = 354**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Gold 6454S processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Aggressive

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu Jan 26 01:18:31 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

**SPECrate®2017\_fp\_base = 336**

**SPECrate®2017\_fp\_peak = 354**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

- 11. Systemd service manager version: systemd 250 (250-6.e19\_0)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. `uname -a`

```
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

2. `w`

```
01:18:31 up 6 min,  2 users,  load average: 0.00, 0.03, 0.00
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1     01:15   3:26   0.00s  0.00s -bash
root      pts/0    01:15   7.00s  0.99s  0.01s -bash
```

3. Username

From environment variable \$USER: root

4. `ulimit -a`

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 2062832
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

**SPECrate®2017\_fp\_base = 336**

**SPECrate®2017\_fp\_peak = 354**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

```

max user processes          (-u) 2062832
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.007/temlogs/preenv.fprate.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6454S
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-63

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL320 Gen11**

(2.20 GHz, Intel Xeon Gold 6454S)

**SPECrate®2017\_fp\_base = 336**

**SPECrate®2017\_fp\_peak = 354**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

## Platform Notes (Continued)

```

Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) Gold 6454S
BIOS Model name:             Intel(R) Xeon(R) Gold 6454S
CPU family:                   6
Model:                        143
Thread(s) per core:          2
Core(s) per socket:          32
Socket(s):                    1
Stepping:                     6
BogoMIPS:                     4400.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                               clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                               lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                               nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                               ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                               sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                               lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                               invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                               vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                               erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                               clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                               xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                               avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                               cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                               arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:               VT-x
L1d cache:                    1.5 MiB (32 instances)
L1i cache:                    1 MiB (32 instances)
L2 cache:                     64 MiB (32 instances)
L3 cache:                     60 MiB (1 instance)
NUMA node(s):                4
NUMA node0 CPU(s):           0-7,32-39
NUMA node1 CPU(s):           8-15,40-47
NUMA node2 CPU(s):           16-23,48-55
NUMA node3 CPU(s):           24-31,56-63
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

## Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	60M	60M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 128697 MB
node 0 free: 128054 MB
node 1 cpus: 8-15,40-47
node 1 size: 129020 MB
node 1 free: 128669 MB
node 2 cpus: 16-23,48-55
node 2 size: 129020 MB
node 2 free: 128572 MB
node 3 cpus: 24-31,56-63
node 3 size: 129009 MB
node 3 free: 128590 MB
node distances:
node  0  1  2  3
0:  10  20  30  30
1:  20  10  30  30
2:  30  30  10  20
3:  30  30  20  10
```

9. /proc/meminfo

MemTotal: 528125980 kB

10. who -r

run-level 3 Jan 26 01:12

11. Systemd service manager version: systemd 250 (250-6.e19\_0)

Default Target	Status
multi-user	running

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

-----  
14. cpupower frequency-info

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

-----  
15. tuned-adm active

Current active profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

## Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 10
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.0 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.0 (Plow)
system-release       Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G  43G  330G  12% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:              HPE
Product:             ProLiant DL320 Gen11
Product Family:     ProLiant
Serial:              CNX2210H28

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** May-2022

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMC94AEBRA103N 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.22  
BIOS Date: 01/18/2023  
BIOS Revision: 1.22  
Firmware Revision: 1.20

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

**SPECrate®2017\_fp\_base = 336**

**SPECrate®2017\_fp\_peak = 354**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

SPECrate®2017\_fp\_base = 336

SPECrate®2017\_fp\_peak = 354

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.20 GHz, Intel Xeon Gold 6454S)

**SPECrate®2017\_fp\_base = 336**

**SPECrate®2017\_fp\_peak = 354**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-25 14:48:30-0500.

Report generated on 2023-02-15 10:33:00 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.