



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

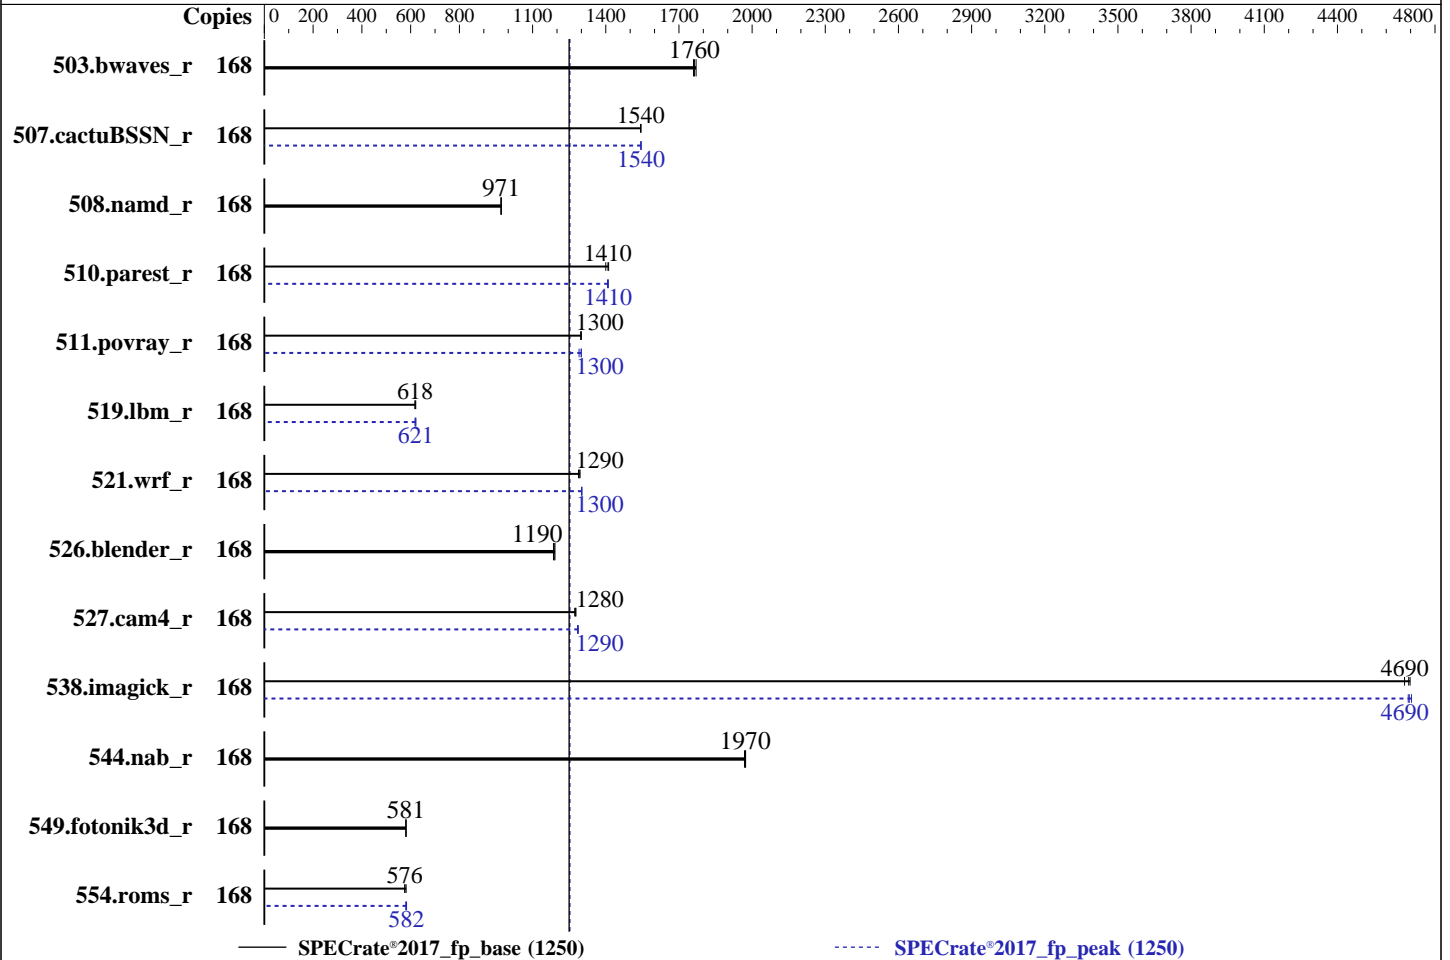

Hardware

CPU Name: AMD EPYC 9634
 Max MHz: 3700
 Nominal: 2250
 Enabled: 168 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip,
 32 MB shared / 7 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 Kernel 5.15.0-43-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version KAE105L 1.20 released Dec-2022
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	168	955	1760	957	1760	952	1770	168	955	1760	957	1760	952	1770
507.cactuBSSN_r	168	138	1540	138	1540	138	1540	168	138	1540	138	1540	138	1540
508.namd_r	168	164	972	164	971	164	970	168	164	972	164	971	164	970
510.parest_r	168	314	1400	311	1410	312	1410	168	312	1410	312	1410	312	1410
511.povray_r	168	302	1300	302	1300	302	1300	168	302	1300	302	1300	304	1290
519.lbm_r	168	286	618	287	618	285	621	168	285	621	285	621	287	618
521.wrf_r	168	291	1290	291	1290	292	1290	168	289	1300	289	1300	289	1300
526.blender_r	168	216	1190	215	1190	215	1190	168	216	1190	215	1190	215	1190
527.cam4_r	168	230	1280	230	1280	231	1270	168	228	1290	229	1280	229	1290
538.imagick_r	168	89.4	4680	88.9	4700	89.0	4690	168	88.8	4700	89.1	4690	89.0	4690
544.nab_r	168	143	1970	143	1970	144	1970	168	143	1970	143	1970	144	1970
549.fotonik3d_r	168	1127	581	1127	581	1128	581	168	1127	581	1127	581	1128	581
554.roms_r	168	464	576	463	576	459	581	168	458	583	458	582	460	580

SPECrate®2017_fp_base = **1250**

SPECrate®2017_fp_peak = **1250**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc400-genoa-B1c/amd_rate_aocc400_genoa_B_lib/
lib:/home/cpu2017-1.1.9-amd-aocc400-genoa-B1c/amd_rate_aocc400_genoa_B_l
ib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA Nodes per Socket set to NPS4
SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-genoa-B1c/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on perf Thu Feb 2 07:14:07 2023

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux perf 5.15.0-43-generic #46-Ubuntu SMP Tue Jul 12 10:30:17 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
07:14:07 up 3 min,  1 user,  load average: 0.75, 0.99, 0.46
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1    -              07:11    1:32   1.37s  0.24s /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

memory(kbytes)          unlimited
locked memory(kbytes)  2097152
process                 3094249
nofiles                 1024
vmemory(kbytes)        unlimited
locks                   unlimited
rtprio                  0

```

5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash ./run_SR645V3_genoa_rxy.sh
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.009/tempslogs/preenv.fprate.009.0.log --lognum 009.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-genoa-B1c

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9634 84-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101111
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 84
siblings       : 84
2 physical ids (chips)
168 processors (hardware threads)
physical id 0: core ids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
physical id 1: core ids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
physical id 0: apicids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
physical id 1: apicids
256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                168
On-line CPU(s) list:  0-167
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9634 84-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   1
Core(s) per socket:   84
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU max MHz:          3701.0000
CPU min MHz:          400.0000
BogoMIPS:              4492.94

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                        lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

```

```

Virtualization:        AMD-V
L1d cache:             5.3 MiB (168 instances)
L1i cache:             5.3 MiB (168 instances)
L2 cache:              168 MiB (168 instances)
L3 cache:              768 MiB (24 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-20
NUMA node1 CPU(s):    21-41
NUMA node2 CPU(s):    42-62
NUMA node3 CPU(s):    63-83

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```

NUMA node4 CPU(s):           84-104
NUMA node5 CPU(s):           105-125
NUMA node6 CPU(s):           126-146
NUMA node7 CPU(s):           147-167
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:      Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                filling
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	5.3M	8	Data	1	64	1	64
L1i	32K	5.3M	8	Instruction	1	64	1	64
L2	1M	168M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-20
node 0 size: 96503 MB
node 0 free: 95624 MB
node 1 cpus: 21-41
node 1 size: 96752 MB
node 1 free: 96022 MB
node 2 cpus: 42-62
node 2 size: 96752 MB
node 2 free: 95972 MB
node 3 cpus: 63-83
node 3 size: 96752 MB
node 3 free: 95888 MB
node 4 cpus: 84-104
node 4 size: 96752 MB
node 4 free: 96012 MB
node 5 cpus: 105-125
node 5 size: 96752 MB
node 5 free: 96105 MB
node 6 cpus: 126-146
node 6 size: 96719 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 6 free: 95975 MB
node 7 cpus: 147-167
node 7 size: 96685 MB
node 7 free: 95937 MB
node distances:
node  0   1   2   3   4   5   6   7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:          792240180 kB

```

```

-----
10. who -r
    run-level 5 Feb 2 07:11

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
    Default Target    Status
    graphical         running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE                UNIT FILES
    enabled               ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                           cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                           grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
                           multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                           setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                           systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                           unattended-upgrades vgauth
    enabled-runtime      netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled             console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
                           systemd-boot-check-no-failures systemd-network-generator systemd-sysex
                           systemd-time-wait-sync upower
    generated            apport openipmi
    indirect             uuid
    masked               cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                           x11-common

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-43-generic
root=UUID=7616761d-0c8a-469d-9659-4d1de0180e8a
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 400 MHz and 3.70 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2250MHz

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap             64
   pages_to_scan             4096
   scan_sleep_millisecs     10000

```

```

-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 22.04.1 LTS

```

```

-----
19. Disk information
   SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-genoa-Blc
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda2       ext4  878G  57G  776G   7% /

```

```

-----
20. /sys/devices/virtual/dmi/id
   Vendor:           Lenovo
   Product:          ThinkSystem SR645 V3 MB,Genoa,DDR5,Oahu,1U
   Product Family:  ThinkSystem
   Serial:           1234567890

```

```

-----
21. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.

```

```

   Memory:
     7x SK Hynix HMC888AEBRA115N 32 GB 2 rank 4800
     17x SK Hynix HMC888AEBRA168N 32 GB 2 rank 4800

```

```

-----
22. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:           Lenovo
   BIOS Version:          KAE105L-1.20
   BIOS Date:             12/29/2022
   BIOS Revision:        1.20

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

Firmware Revision: 1.20

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
544.nab_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

```
527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc
```

```
526.blender_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 1250

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -flt0 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvector-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdallic -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(2.25 GHz,AMD EPYC 9634)

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = 1250

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-02 02:14:06-0500.

Report generated on 2023-03-02 11:25:51 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.