



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

## SPECrate®2017\_int\_base = 218

## SPECrate®2017\_int\_peak = 222

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

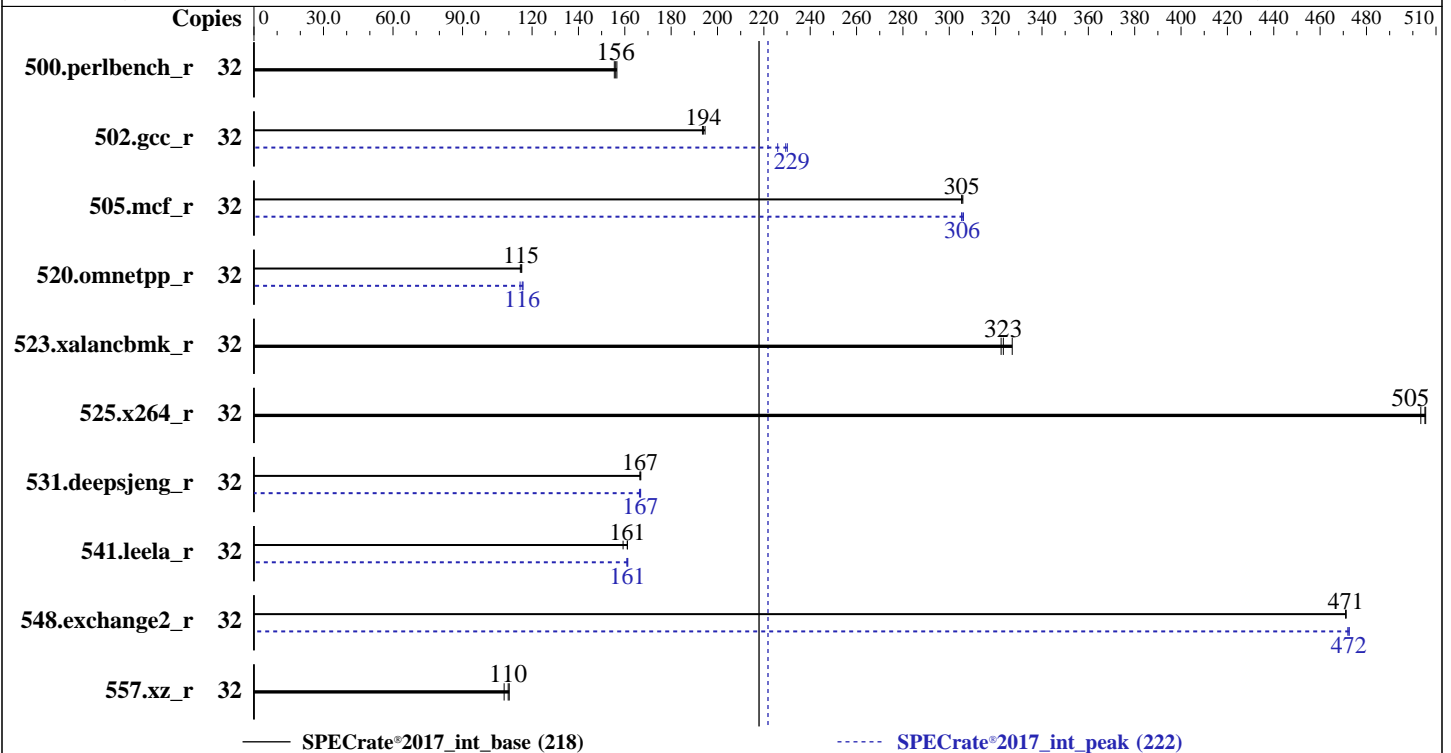

### Hardware

CPU Name: AMD EPYC 9174F  
 Max MHz: 4400  
 Nominal: 4100  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 2 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1.6 TB NVMe SSD, RAID 0  
 Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
 Kernel 5.15.0-53-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version v1.12 11/24/2022 released  
 Nov-2022  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2023  
Hardware Availability: Nov-2022  
Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	328	155	<b><u>326</u></b>	<b><u>156</u></b>	325	157	32	328	155	<b><u>326</u></b>	<b><u>156</u></b>	325	157
502.gcc_r	32	234	194	<b><u>234</u></b>	<b><u>194</u></b>	233	195	32	201	226	<b><u>197</u></b>	<b><u>229</u></b>	197	230
505.mcf_r	32	169	306	<b><u>169</u></b>	<b><u>305</u></b>	169	305	32	169	306	169	305	<b><u>169</u></b>	<b><u>306</u></b>
520.omnetpp_r	32	365	115	<b><u>364</u></b>	<b><u>115</u></b>	363	116	32	362	116	366	115	<b><u>363</u></b>	<b><u>116</u></b>
523.xalancbmk_r	32	103	327	<b><u>105</u></b>	<b><u>323</u></b>	105	322	32	103	327	<b><u>105</u></b>	<b><u>323</u></b>	105	322
525.x264_r	32	111	506	<b><u>111</u></b>	<b><u>505</u></b>	111	503	32	111	506	<b><u>111</u></b>	<b><u>505</u></b>	111	503
531.deepsjeng_r	32	220	167	220	167	<b><u>220</u></b>	<b><u>167</u></b>	32	220	167	220	166	<b><u>220</u></b>	<b><u>167</u></b>
541.leela_r	32	329	161	<b><u>329</u></b>	<b><u>161</u></b>	333	159	32	329	161	329	161	<b><u>329</u></b>	<b><u>161</u></b>
548.exchange2_r	32	178	471	<b><u>178</u></b>	<b><u>471</u></b>	178	471	32	177	473	178	472	<b><u>177</u></b>	<b><u>472</u></b>
557.xz_r	32	314	110	320	108	<b><u>315</u></b>	<b><u>110</u></b>	32	314	110	320	108	<b><u>315</u></b>	<b><u>110</u></b>

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_rate\_aocc400\_genoa\_B\_lib/lib:/home/cpu2017/amd\_rate\_a  
occ400\_genoa\_B\_lib/lib32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration  
Workload Profile set to General Throughput Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
NUMA memory domains per socket set to Four memory domains per socket  
Thermal Configuration set to Maximum Cooling  
ACPI CST C2 Latency set to 18 microseconds  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0x0A10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on admin1 Tue Jun 28 19:19:19 2022

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux admin1 5.15.0-53-generic #59-Ubuntu SMP Mon Oct 17 18:53:30 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
19:19:19 up 1 day, 50 min,  5 users,  load average: 0.08, 0.15, 0.99
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
admin1    tty1     -             Mon18      24:47m    0.06s   0.00s  -bash
admin1    pts/0    172.16.0.100  Mon18      24:47m    0.23s   0.09s  sshd: admin1 [priv]
admin1    pts/1    172.16.0.100  Mon18      15.00s    3.01s   0.23s  sudo -i
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

admin1	pts/2	172.16.0.100	Mon21	21:40m	0.02s	0.09s	sshd: admin1 [priv]
admin1	pts/3	172.16.0.100	Mon21	21:25m	0.02s	0.01s	sudo -i

### 3. Username

```
From environment variable $USER: root
From the command 'logname': admin1
```

### 4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                1546264
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0
```

### 5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
sudo -i
sudo -i
-bash
python3 ./run_intrrate.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9174F 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```
model          : 17
stepping       : 1
microcode      : 0xa10110e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 16
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9174F 16-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           4409.0000
CPU min MHz:           400.0000
BogoMIPS:              8187.00
```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpeext perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 invpcid\_single hw\_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin cpc arat npt  
lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists  
pausefilter pfthreshold avic v\_vmsave\_vmload vgif v\_spec\_ctrl avx512vbmi  
umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg  
avx512\_vpopcntdq la57 rdpid overflow\_recov succor smca fsrm flush\_l1d

```

Virtualization: AMD-V
L1d cache: 512 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0,1,16,17
NUMA node1 CPU(s): 8,9,24,25
NUMA node2 CPU(s): 4,5,20,21
NUMA node3 CPU(s): 12,13,28,29
NUMA node4 CPU(s): 6,7,22,23
NUMA node5 CPU(s): 14,15,30,31
NUMA node6 CPU(s): 2,3,18,19
NUMA node7 CPU(s): 10,11,26,27
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-1,16-17
node 0 size: 48072 MB
node 0 free: 47856 MB
node 1 cpus: 8-9,24-25

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

node 1 size: 48382 MB
node 1 free: 48179 MB
node 2 cpus: 4-5,20-21
node 2 size: 48382 MB
node 2 free: 47992 MB
node 3 cpus: 12-13,28-29
node 3 size: 48382 MB
node 3 free: 48221 MB
node 4 cpus: 6-7,22-23
node 4 size: 48382 MB
node 4 free: 48209 MB
node 5 cpus: 14-15,30-31
node 5 size: 48382 MB
node 5 free: 48099 MB
node 6 cpus: 2-3,18-19
node 6 size: 48382 MB
node 6 free: 48161 MB
node 7 cpus: 10-11,26-27
node 7 size: 48307 MB
node 7 free: 48109 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 11 12 12 12 12 12 12
  1:  11 10 12 12 12 12 12 12
  2:  12 12 10 11 12 12 12 12
  3:  12 12 11 10 12 12 12 12
  4:  12 12 12 12 10 11 12 12
  5:  12 12 12 12 11 10 12 12
  6:  12 12 12 12 12 12 10 11
  7:  12 12 12 12 12 12 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:      395957324 kB

```

```

-----
10. who -r
    run-level 5 Jun 27 18:30

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
    Default Target    Status
    graphical         degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD    ACTIVE SUB    DESCRIPTION

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```
* fwupd-refresh.service          loaded failed failed Refresh fwupd metadata and update motd
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
```

### 13. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
                lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
                secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled       console-getty debug-shell iscsid nftables rsync serial-getty@
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync upower
generated      apport
indirect       uidd
masked         cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                x11-common
```

### 14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-5.15.0-53-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
```

### 15. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 400 MHz and 4.41 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
  Boost States: 0
  Total States: 3
  Pstate-P0: 4100MHz
```

### 16. tuned-adm active

```
Current active profile: throughput-performance
```

### 17. sysctl

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.1 LTS

```

```

-----
21. Disk information
SPEC is set to: /home/cpu2017
Filesystem                Type      Size   Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4      98G    37G   57G  40% /

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Nov-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:           HPE
Product:          ProLiant DL345 Gen11
Product Family:  ProLiant
Serial:           DL345G11-002

```

### 23. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

```

5x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
4x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800
3x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800

```

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      HPE
BIOS Version:     1.12
BIOS Date:        11/24/2022
BIOS Revision:    1.12
Firmware Revision: 1.10

```

## Compiler Version Notes

```

=====
C      | 502.gcc_r(peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

```

```

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2023  
**Hardware Availability:** Nov-2022  
**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

```
525.x264_r: basepeak = yes
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate®2017\_int\_base = 218

SPECrate®2017\_int\_peak = 222

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/bl/rate/amd\_rate\_aocc400\_genoa\_B\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument





# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9174F)

SPECrate<sup>®</sup>2017\_int\_base = 218

SPECrate<sup>®</sup>2017\_int\_peak = 222

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2023

**Hardware Availability:** Nov-2022

**Software Availability:** Nov-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.2.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.2.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2022-06-28 15:19:19-0400.

Report generated on 2023-03-15 10:17:43 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-14.