



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

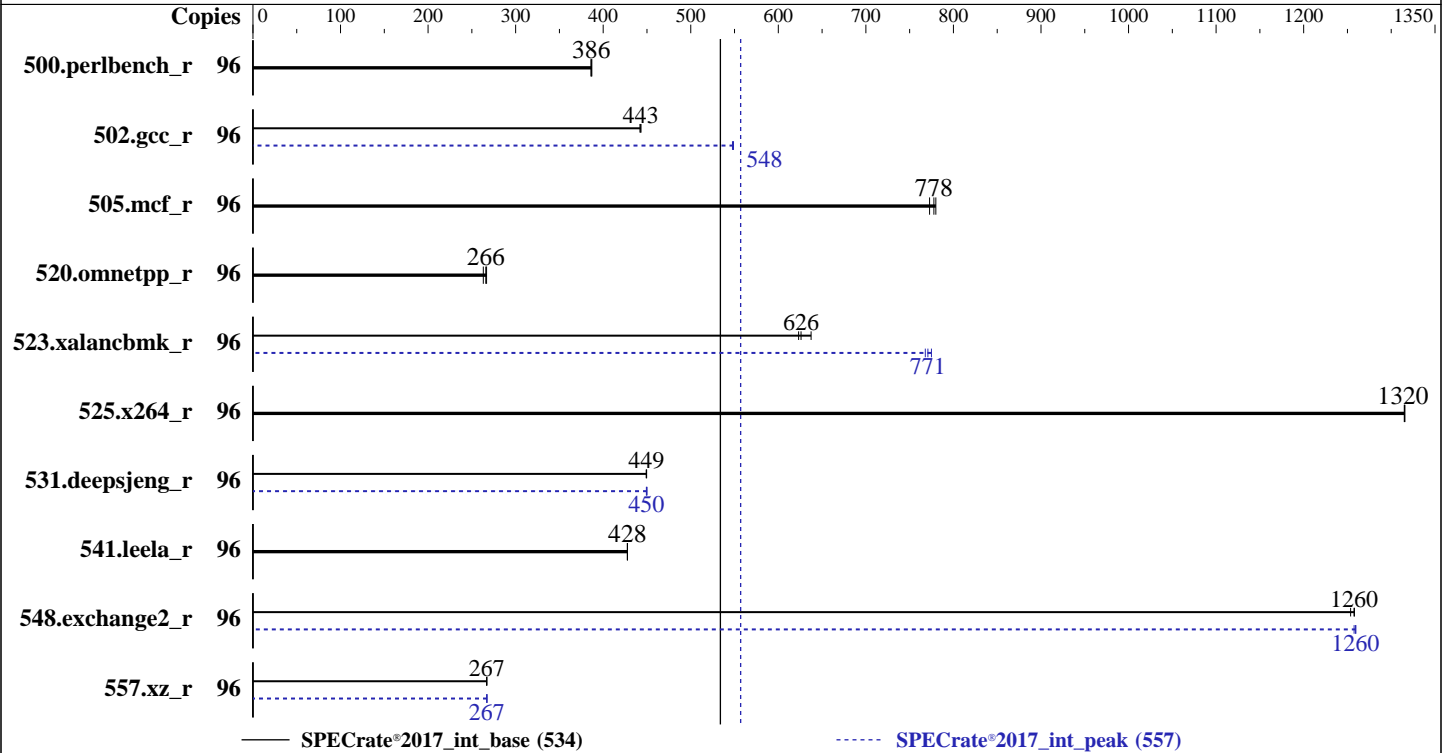

Hardware

CPU Name: AMD EPYC 9454P
 Max MHz: 3800
 Nominal: 2750
 Enabled: 48 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 6 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.6 TB PCIE NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 0602 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	396	386	395	387	395	386	96	396	386	395	387	395	386
502.gcc_r	96	307	443	307	443	308	442	96	248	549	248	548	248	548
505.mcf_r	96	201	773	199	780	199	778	96	201	773	199	780	199	778
520.omnetpp_r	96	474	266	479	263	472	267	96	474	266	479	263	472	267
523.xalancbmk_r	96	163	623	162	626	159	637	96	132	771	131	775	132	768
525.x264_r	96	128	1310	128	1320	128	1320	96	128	1310	128	1320	128	1320
531.deepsjeng_r	96	245	450	245	449	245	449	96	245	450	244	450	245	449
541.leela_r	96	372	428	372	428	372	428	96	372	428	372	428	372	428
548.exchange2_r	96	201	1250	200	1260	200	1260	96	200	1260	200	1260	200	1260
557.xz_r	96	389	267	388	267	388	267	96	388	267	388	267	388	267

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/cpull19/amd_rate_aocc400_genoa_B_lib/lib:/cpull19/amd_rate_aocc400_genoa
_B_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalanbmk_r peak run:
MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:
SR-IOV Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS4
Determinism Control = Manual
Determinism Enable = Power
Engine Boost = Aggressive
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
IOMMU = Disabled

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

BMC Configuration:

Fan mode = Full speed mode

sysinfo program /cpull9/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Mar 7 01:13:12 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
01:13:12 up 14:17, 2 users, load average: 23.28, 71.72, 86.69
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - Mon10 14:13m 1.22s 0.12s /bin/bash ./amd_rate_aocc400_genoa_B1.sh

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
root      tty2      -                Mon11      9:08m  0.03s  0.03s  -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094986
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024000
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094986
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.147/templogs/preenv.intrate.147.0.log --lognum 147.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpull9
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9454P 48-Core Processor
vendor_id      : AuthenticAMD
cpu family      : 25
model          : 17
stepping       : 1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```

microcode      : 0xa1011111
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 48
siblings      : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9454P 48-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):              1
Stepping:               1
Frequency boost:        enabled
CPU max MHz:           3810.7910
CPU min MHz:           1500.0000
BogoMIPS:               5491.52

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_llid
```

```
Virtualization: AMD-V
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
```

```
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 193283 MB
node 0 free: 191779 MB
node 1 cpus: 12-23,60-71
node 1 size: 193529 MB
node 1 free: 192773 MB
node 2 cpus: 24-35,72-83
node 2 size: 193529 MB
node 2 free: 192803 MB
node 3 cpus: 36-47,84-95
node 3 size: 193428 MB
node 3 free: 192704 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

node distances:

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

9. /proc/meminfo
MemTotal: 792341736 kB

10. who -r
run-level 3 Mar 6 10:56

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvmmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-check-no-failures systemd-timesyncd tuned udisks2
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet
cgroup_disable=memory,cpu,cpuacct,blkio,hugetlb,pids,cpuset,perf_event,freezer,devices,net_cls,net_prio

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 2.75 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: latency-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvice madvice never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Dec-2022
Software Availability: Nov-2022

Platform Notes (Continued)

max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information
SPEC is set to: /cpull9
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 500G 102G 399G 21% /

21. /sys/devices/virtual/dmi/id
Vendor: ASUSTeK COMPUTER INC.
Product: RS520A-E12-RS12U
Product Family: Server
Serial: 123456789012

22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 0602
BIOS Date: 12/20/2022
BIOS Revision: 6.2

Compiler Version Notes

=====
C | 502.gcc_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
 Target: i386-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
 C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
 | 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
 C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
 Target: i386-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
 C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
 | 525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
 Target: x86_64-unknown-linux-gnu
 Thread model: posix
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
 C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
 Target: i386-unknown-linux-gnu
 Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 523.xalancbmk_r(peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdallic
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: basepeak = yes
```

```
557.xz_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```




SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.75 GHz, AMD EPYC 9454P)

SPECrate®2017_int_base = 534

SPECrate®2017_int_peak = 557

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-06 12:13:11-0500.

Report generated on 2023-03-29 00:38:29 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-28.