



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

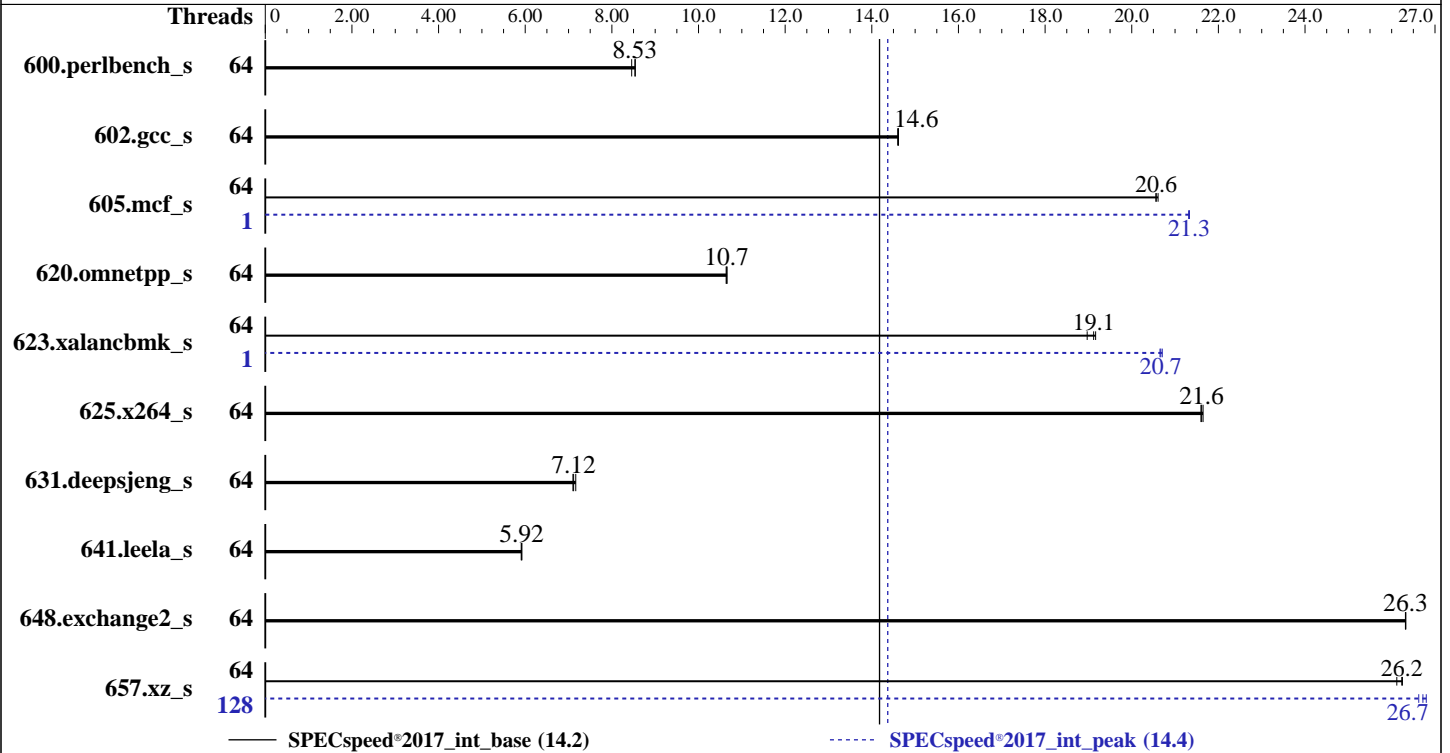

Hardware

CPU Name: AMD EPYC 9554
 Max MHz: 3750
 Nominal: 3100
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.6 TB PCIE NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 0602 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	210	8.46	208	8.54	208	8.53	64	210	8.46	208	8.54	208	8.53
602.gcc_s	64	273	14.6	273	14.6	272	14.6	64	273	14.6	273	14.6	272	14.6
605.mcf_s	64	230	20.6	229	20.6	230	20.6	1	221	21.3	221	21.3	221	21.3
620.omnetpp_s	64	153	10.6	153	10.7	153	10.7	64	153	10.6	153	10.7	153	10.7
623.xalancbmk_s	64	73.9	19.2	74.1	19.1	74.7	19.0	1	68.6	20.7	68.4	20.7	68.5	20.7
625.x264_s	64	81.5	21.6	81.6	21.6	81.7	21.6	64	81.5	21.6	81.6	21.6	81.7	21.6
631.deepsjeng_s	64	200	7.17	202	7.10	201	7.12	64	200	7.17	202	7.10	201	7.12
641.leela_s	64	288	5.92	289	5.91	288	5.92	64	288	5.92	289	5.91	288	5.92
648.exchange2_s	64	112	26.3	112	26.3	112	26.3	64	112	26.3	112	26.3	112	26.3
657.xz_s	64	236	26.2	237	26.1	236	26.2	128	231	26.7	231	26.8	232	26.6

SPECspeed®2017_int_base = **14.2**

SPECspeed®2017_int_peak = **14.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"  
LD_LIBRARY_PATH = "/cpull19/amd_speed_aocc400_genoa_B_lib/lib:"  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:
SR-IOV Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

Determinism Control = Manual
Determinism Enable = Power
Engine Boost = Aggressive
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
IOMMU = Disabled
BMC Configuration:
Fan mode = Full speed mode

Sysinfo program /cpull9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 1 21:01:23 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
  21:01:23 up  3:19,  1 user,  load average:  4.78,  5.77,  3.50
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -              17:42   3:18m  1.10s  0.06s  /bin/bash ./amd_speed_aocc400_genoa_B1.sh
```

```
-----
3. Username
  From environment variable $USER:  root
```

```
-----
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority     (-e) 0
  file size               (blocks, -f) unlimited
  pending signals        (-i) 3094882
  max locked memory      (kbytes, -l) 2097152
  max memory size        (kbytes, -m) unlimited
  open files             (-n) 1024000
  pipe size              (512 bytes, -p) 8
  POSIX message queues   (bytes, -q) 819200
  real-time priority     (-r) 0
  stack size             (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes     (-u) 3094882
  virtual memory         (kbytes, -v) unlimited
  file locks            (-x) unlimited
```

```
-----
5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 30
  login -- root
  -bash
  /bin/bash ./speed.sh
  python3 ./run_amd_speed_aocc400_genoa_B1.py
  /bin/bash ./amd_speed_aocc400_genoa_B1.sh
  runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intspeed
  runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
  --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.095/templogs/preenv.intspeed.095.0.log --lognum 095.0 --from_runcpu 2
  speiperl $SPEC/bin/sysinfo
  $SPEC = /cpull19
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

6. /proc/cpuinfo

```

model name      : AMD EPYC 9554 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101111
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 64
siblings       : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:              AuthenticAMD
Model name:            AMD EPYC 9554 64-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3762.9880
CPU min MHz:           1500.0000
BogoMIPS:              6190.73

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```

perfctr_core perfctr_nb bpevt perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bml
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_nbm_total cqm_nbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

```

```

Virtualization: AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 193281 MB
node 0 free: 192042 MB
node 1 cpus: 16-31,80-95
node 1 size: 193527 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 1 free: 193077 MB
node 2 cpus: 32-47,96-111
node 2 size: 193527 MB
node 2 free: 192983 MB
node 3 cpus: 48-63,112-127
node 3 size: 193408 MB
node 3 free: 193077 MB
node distances:
node  0  1  2  3
  0:  10 12 12 12
  1:  12 10 12 12
  2:  12 12 10 12
  3:  12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:          792315216 kB

```

```

10. who -r
    run-level 3 Mar 1 17:42

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target    Status
    multi-user        running

```

```

12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
                postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewalld gpm grub2-once haveged-switch-root ipmi ipmievdev issue-add-ssh-keys kexec-load
                lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind
                rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect        wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet
cgroup_disable=memory,cpu,cpuacct,blkio,hugetlb,pids,cpuset,perf_event,freezer,devices,net_cls,net_prio
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information

SPEC is set to: /cpull9
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 500G 101G 399G 21% /

21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.
Product: RS520A-E12-RS12U
Product Family: Server
Serial: 123456789012

22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 0602
BIOS Date: 12/20/2022

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023
Hardware Availability: Dec-2022
Software Availability: Nov-2022

Platform Notes (Continued)

BIOS Revision: 6.2

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----
```

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: Same as 605.mcf_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(3.10 GHz, AMD EPYC 9554)

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-01 08:01:22-0500.

Report generated on 2023-03-29 00:39:27 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-28.