



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

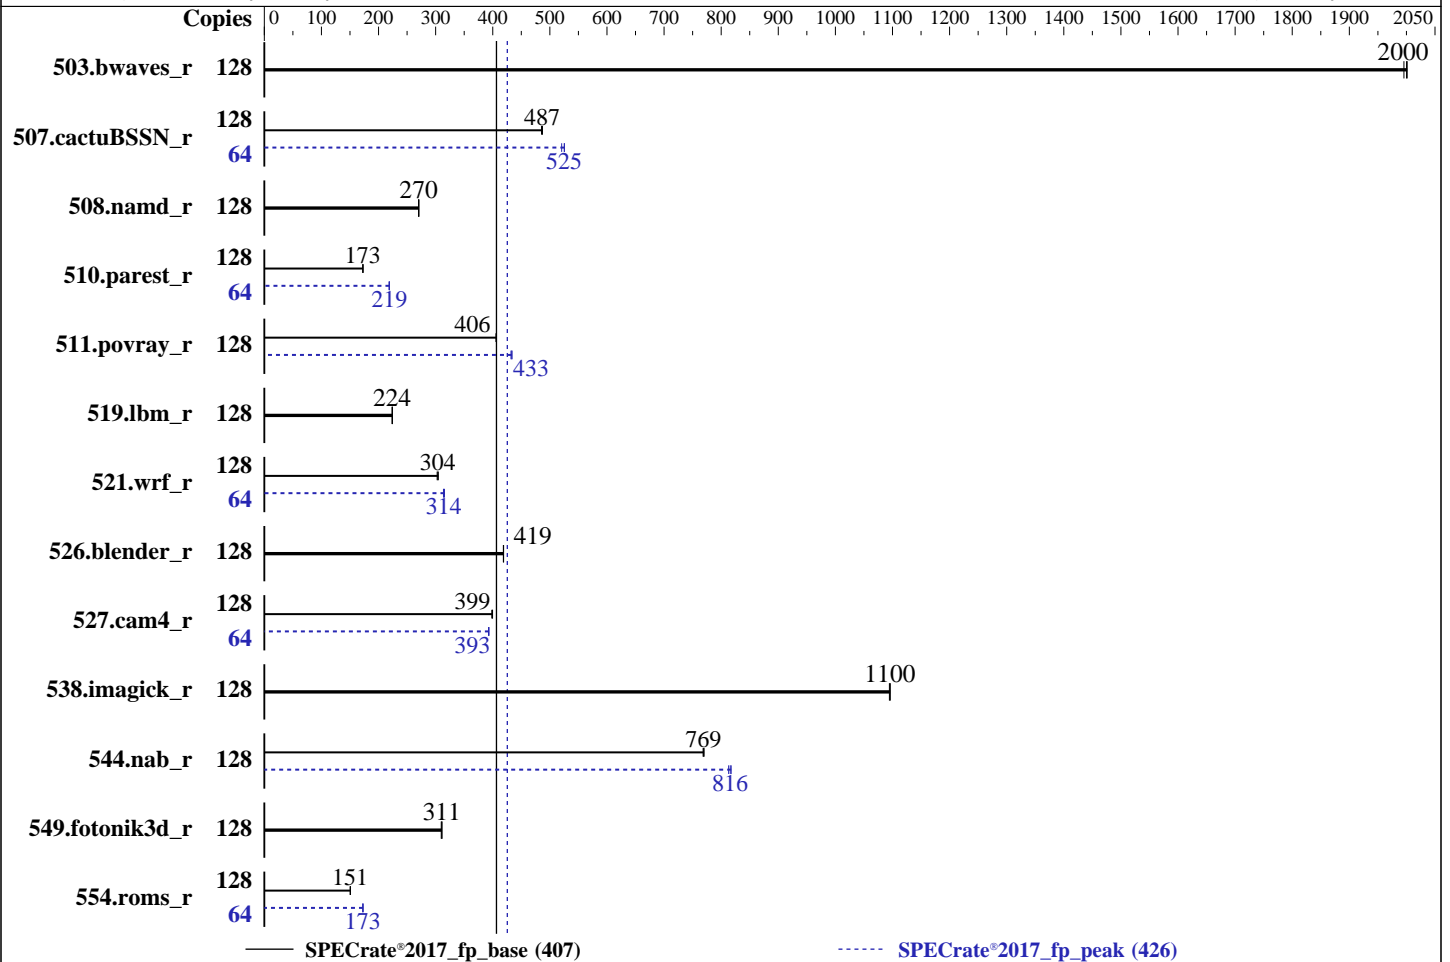

Hardware

CPU Name: Intel Xeon Gold 6338N
 Max MHz: 3500
 Nominal: 2200
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 512 GB NVMe SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version PEGC0042 released Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	641	2000	643	2000	642	2000	128	641	2000	643	2000	642	2000
507.cactuBSSN_r	128	334	485	333	487	333	487	64	154	525	156	521	154	525
508.namd_r	128	450	270	450	270	449	271	128	450	270	450	270	449	271
510.parest_r	128	1941	173	1942	172	1937	173	64	767	218	764	219	765	219
511.povray_r	128	736	406	735	406	736	406	128	692	432	690	433	689	434
519.lbm_r	128	602	224	602	224	602	224	128	602	224	602	224	602	224
521.wrf_r	128	947	303	941	305	944	304	64	457	314	454	315	456	314
526.blender_r	128	466	419	465	419	465	419	128	466	419	465	419	465	419
527.cam4_r	128	561	399	560	400	562	398	64	285	393	285	393	285	393
538.imagick_r	128	291	1100	290	1100	291	1090	128	291	1100	290	1100	291	1090
544.nab_r	128	280	770	280	768	280	769	128	265	813	264	816	264	818
549.fotonik3d_r	128	1605	311	1610	310	1604	311	128	1605	311	1610	310	1604	311
554.roms_r	128	1351	151	1350	151	1351	151	64	589	173	589	173	589	173

SPECrate®2017_fp_base = **407**

SPECrate®2017_fp_peak = **426**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

General Notes (Continued)

```
sync; echo 1> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

BIOS Settings:

```
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
SNC (Sub NUMA) = Enable
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
```

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on Tyronespec Mon Mar 13 15:56:22 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 239 (239-51.el8)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `tuned-adm active`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```

16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```

```

-----
1. uname -a
Linux Tyronespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 15:56:22 up 10:02,  2 users,  load average: 71.81, 111.82, 119.86
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1     -             05:54       9:08m      1.19s     0.01s    -bash
root      tty2     -             07:38       8:17m      0.05s     0.05s    -bash

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126627
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126627
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 17
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd0002e0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.32.1:
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s):       2

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```

NUMA node(s):          2
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:           6
Model:                106
Model name:           Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
BIOS Model name:      Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
Stepping:             6
CPU MHz:              2200.000
CPU max MHz:          3500.0000
CPU min MHz:          800.0000
BogoMIPS:             4400.00
Virtualization:       VT-x
L1d cache:            48K
L1i cache:            32K
L2 cache:             1280K
L3 cache:             49152K
NUMA node0 CPU(s):   0-31,64-95
NUMA node1 CPU(s):   32-63,96-127

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                    acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                    arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                    pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16 xtpr pdcm pcid dca
                    sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                    abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
                    stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
                    sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                    wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
                    umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                    avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 515673 MB
node 0 free: 487626 MB
node 1 cpus: 32-63,96-127
node 1 size: 516042 MB
node 1 free: 489427 MB
node distances:
node  0  1
  0:   10  20
  1:   20  10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407
SPECrate®2017_fp_peak = 426

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 1056476736 kB

10. who -r

run-level 3 Mar 13 05:54

11. Systemd service manager version: systemd 239 (239-51.el8)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt libvirtfd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvidia-hibernate nvidia-resume nvidia-suspend nvmefc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd syslog timedatex tuned udisks2 vdo vgauthd vmtoolsd
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell dnsmasq ebttables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprdump iprinit iprupdate iscsid iscsiui kpatch kvm_stat ledmon man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvidia-powerd nvmmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ snmpd snmptrapd speech-dispatcherd sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcsd tog-pegasus upower virtinterfaced virtnetworkd virtnodevd virtnwfilterd virtproxymd virtqemud virtsecret virtstoraged wpa_supplicant
generated	SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup
indirect	spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd virtlogd
masked	systemd-timedated

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd1,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

```
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 3.50 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    0
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

defrag always defer defer+madvice [madvice] never

enabled [always] madvice never

hpage_pmd_size 2097152

shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none            511
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs     10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release                Red Hat Enterprise Linux 8.5 (Ootpa)
redhat-release            Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release            Red Hat Enterprise Linux release 8.5 (Ootpa)
```

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

```
itlb_multihit            Not affected
lltf                      Not affected
mds                       Not affected
meltdown                  Not affected
spec_store_bypass        Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1                Mitigation: usercopy/swaps barriers and __user pointer sanitization
spectre_v2                Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds                     Not affected
tsx_async_abort           Not affected
```

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information

SPEC is set to: /home/cpu2017

```
Filesystem                Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home     xfs       402G  209G  193G   52% /home
```

22. /sys/devices/virtual/dmi/id

```
Vendor:                    TyroneSystems
Product:                   TDI100C3R-212
Product Family:            Family
Serial:                    2X20022302
```

23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron 36ASF8G72PZ-3G2F1 64 GB 2 rank 3200, configured at 2666

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: PEGC0042

BIOS Date: 01/16/2023

BIOS Revision: 5.22

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
 | 544.nab_r(base, peak)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
 507.cactuBSSN_r: -DSPEC_LP64
 508.namd_r: -DSPEC_LP64
 510.parest_r: -DSPEC_LP64
 511.povray_r: -DSPEC_LP64
 519.lbm_r: -DSPEC_LP64
 521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
 527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
 538.imagick_r: -DSPEC_LP64
 544.nab_r: -DSPEC_LP64
 549.fotonik3d_r: -DSPEC_LP64
 554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
 -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
 -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
 -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
 -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc
 -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.20 GHz, Intel Xeon Gold 6338N)

SPECrate®2017_fp_base = 407

SPECrate®2017_fp_peak = 426

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-13 11:56:22-0400.

Report generated on 2023-04-12 12:42:30 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.