



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

CPU2017 License: 006042


Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

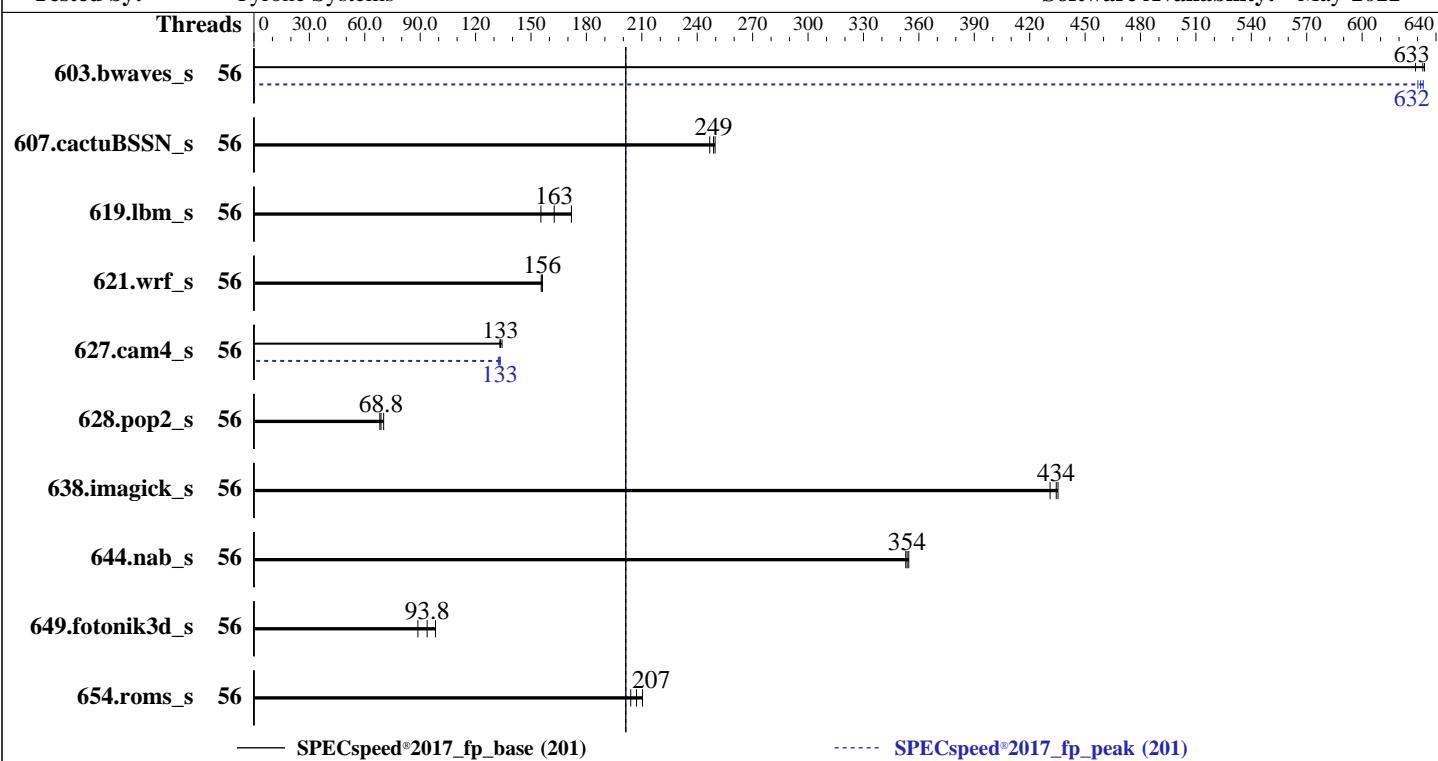

Hardware		Software	
CPU Name:	Intel Xeon Gold 6330	OS:	Red Hat Enterprise Linux release 8.5 (Ootpa)
Max MHz:	3100	Compiler:	Kernel 4.18.0-348.el8.x86_64
Nominal:	2000		C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	56 cores, 2 chips, 2 threads/core		Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Orderable:	1,2 Chips	Parallel:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version SE5C620.86B.01.01.0004.2110190142 released Oct-2021
L2:	1.25 MB I+D on chip per core	File System:	xfs
L3:	42 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)	Peak Pointers:	64-bit
Storage:	1 x 512 GB NVMe SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	<b>93.2</b>	<b>633</b>	93.1	634	93.8	629	56	<b>93.6</b>	<b>630</b>	93.2	633	<b>93.4</b>	<b>632</b>
607.cactuBSSN_s	56	66.8	250	<b>67.0</b>	<b>249</b>	67.6	247	56	66.8	250	<b>67.0</b>	<b>249</b>	67.6	247
619.lbm_s	56	33.7	155	<b>32.2</b>	<b>163</b>	30.5	172	56	33.7	155	<b>32.2</b>	<b>163</b>	30.5	172
621.wrf_s	56	85.0	156	<b>84.8</b>	<b>156</b>	84.7	156	56	85.0	156	<b>84.8</b>	<b>156</b>	84.7	156
627.cam4_s	56	66.0	134	<b>66.4</b>	<b>133</b>	66.6	133	56	<b>66.6</b>	<b>133</b>	67.0	132	66.5	133
628.pop2_s	56	174	68.1	169	70.2	<b>173</b>	<b>68.8</b>	56	174	68.1	169	70.2	<b>173</b>	<b>68.8</b>
638.imagick_s	56	33.1	435	33.5	431	<b>33.2</b>	<b>434</b>	56	33.1	435	33.5	431	<b>33.2</b>	<b>434</b>
644.nab_s	56	49.3	355	49.5	353	<b>49.4</b>	<b>354</b>	56	49.3	355	49.5	353	<b>49.4</b>	<b>354</b>
649.fotonik3d_s	56	<b>97.2</b>	<b>93.8</b>	103	88.8	92.8	98.3	56	<b>97.2</b>	<b>93.8</b>	103	88.8	92.8	98.3
654.roms_s	56	<b>76.0</b>	<b>207</b>	77.2	204	74.8	210	56	<b>76.0</b>	<b>207</b>	77.2	204	74.8	210

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 1> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## General Notes (Continued)

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance

KTI Prefetch = Enable

LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on icelake2 Wed Mar 22 14:56:03 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-51.el8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

**Test Date:** Mar-2023

Test Sponsor: Netweb Pte Ltd

**Hardware Availability:** Apr-2021

Tested by: Tyrone Systems

**Software Availability:** May-2022

## Platform Notes (Continued)

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

21. Disk information

22. /sys/devices/virtual/dmi/id

23. dmidecode

24. BIOS

1. uname -a

```
Linux icelake2 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
```

2. w

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	Tue12	4:28m	1.37s	0.01s	-bash
root	tty2	-	Tue12	26:22m	0.03s	0.03s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	0
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4126770
max locked memory	(kbytes, -l)	64
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4126770
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
```

```
login -- root
```

```
-bash
```

```
-bash
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## Platform Notes (Continued)

```
runcpu --nobuild --action validate --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=56 --tune base,peak -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=56 --tune base,peak --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

---

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
vendor_id       : GenuineIntel
cpu family     : 6
model          : 106
stepping        : 6
microcode       : 0xd000311
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 28
siblings        : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

```
7. lscpu
```

```
From lscpu from util-linux 2.32.1:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:              Little Endian
CPU(s):                 112
On-line CPU(s) list:    0-111
Thread(s) per core:     2
Core(s) per socket:     28
Socket(s):               2
NUMA node(s):            4
Vendor ID:               GenuineIntel
BIOS Vendor ID:          Intel(R) Corporation
CPU family:              6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## Platform Notes (Continued)

Model:	106
Model name:	Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
BIOS Model name:	Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
Stepping:	6
CPU MHz:	2000.000
CPU max MHz:	3100.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Virtualization:	VT-x
L1d cache:	48K
L1i cache:	32K
L2 cache:	1280K
L3 cache:	43008K
NUMA node0 CPU(s):	0-13,56-69
NUMA node1 CPU(s):	14-27,70-83
NUMA node2 CPU(s):	28-41,84-97
NUMA node3 CPU(s):	42-55,98-111
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced fsbsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

---

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-13,56-69
node 0 size: 257666 MB
node 0 free: 238015 MB
node 1 cpus: 14-27,70-83
node 1 size: 258041 MB
node 1 free: 241047 MB
node 2 cpus: 28-41,84-97
node 2 size: 258041 MB
node 2 free: 241788 MB
node 3 cpus: 42-55,98-111
node 3 size: 258001 MB
node 3 free: 237612 MB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

**Test Date:** Mar-2023

Test Sponsor: Netweb Pte Ltd

**Hardware Availability:** Apr-2021

Tested by: Tyrone Systems

**Software Availability:** May-2022

## Platform Notes (Continued)

```
node distances:  
node  0   1   2   3  
 0: 10  11  20  20  
 1: 11  10  20  20  
 2: 20  20  10  11  
 3: 20  20  11  10
```

```
-----  
9. /proc/meminfo  
MemTotal:      1056514228 kB
```

```
-----  
10. who -r  
run-level 3 Mar 21 12:31
```

```
-----  
11. Systemd service manager version: systemd 239 (239-51.el8)  
Default Target  Status  
multi-user     running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon  
                atd auditd autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm  
                getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned  
                libstoragemgmt libvirtd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd  
nis-domainname nvmefc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog  
rtkit-daemon selinux-autorelabel-mark smartd sshd sssd syslog timedatedex tuned udisks2 vdo  
                vgaauthd vmtoolsd  
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell  
dnsmasq ebtables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprdump  
                iprinit iprupdate ipsec iscsid iscsiuiokpatch kvm_stat ledmon libvirt-guests  
man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server  
nftables numad nvmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd  
ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ speech-dispatcherd  
sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcsd upower virtinterfaced  
virtnetworkd virtnodedeved virtnwfilterd virtproxyd virtqemud virtsecretd virtstoraged  
                wpa_supplicant  
generated      SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap  
                gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server  
                gcc-toolset-9-systemtap scripts startup  
indirect       spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd  
                virtlogd  
masked         systemd-timedated
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

14. cpupower frequency-info

```
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.

    boost state support:
        Supported: yes
        Active: yes
```

15. tuned-adm active

```
Current active profile: throughput-performance
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## Platform Notes (Continued)

17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 8.5 (Ootpa)  
redhat-release Red Hat Enterprise Linux release 8.5 (Ootpa)  
system-release Red Hat Enterprise Linux release 8.5 (Ootpa)

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities  
itlb\_multihit Not affected  
l1tf Not affected  
mds Not affected  
meltdown Not affected  
spec\_store\_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
spectre\_v1 Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization  
spectre\_v2 Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
srbds Not affected  
tsx\_async\_abort Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example  
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 402G 286G 116G 72% /home

22. /sys/devices/virtual/dmi/id  
Vendor: Tyrone\_Systems  
Product: Tyrone\_Camarero\_IDI100C2R-28

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Date: Mar-2023

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Apr-2021

Tested by: Tyrone Systems

Software Availability: May-2022

## Platform Notes (Continued)

Product Family: Family

Serial: 2X22462203

### 23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

6x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

26x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200, configured at 2933

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Intel Corporation

BIOS Version: SE5C620.86B.01.01.0004.2110190142

BIOS Date: 10/19/2021

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

## Compiler Version Notes (Continued)

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSpeed®2017\_fp\_base = 201**

**SPECSpeed®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

## Base Portability Flags (Continued)

```
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECSPEED®2017\_fp\_base = 201**

**SPECSPEED®2017\_fp\_peak = 201**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_fp\_base = 201**

**SPECspeed®2017\_fp\_peak = 201**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 05:26:03-0400.

Report generated on 2023-04-12 12:42:49 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.