



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

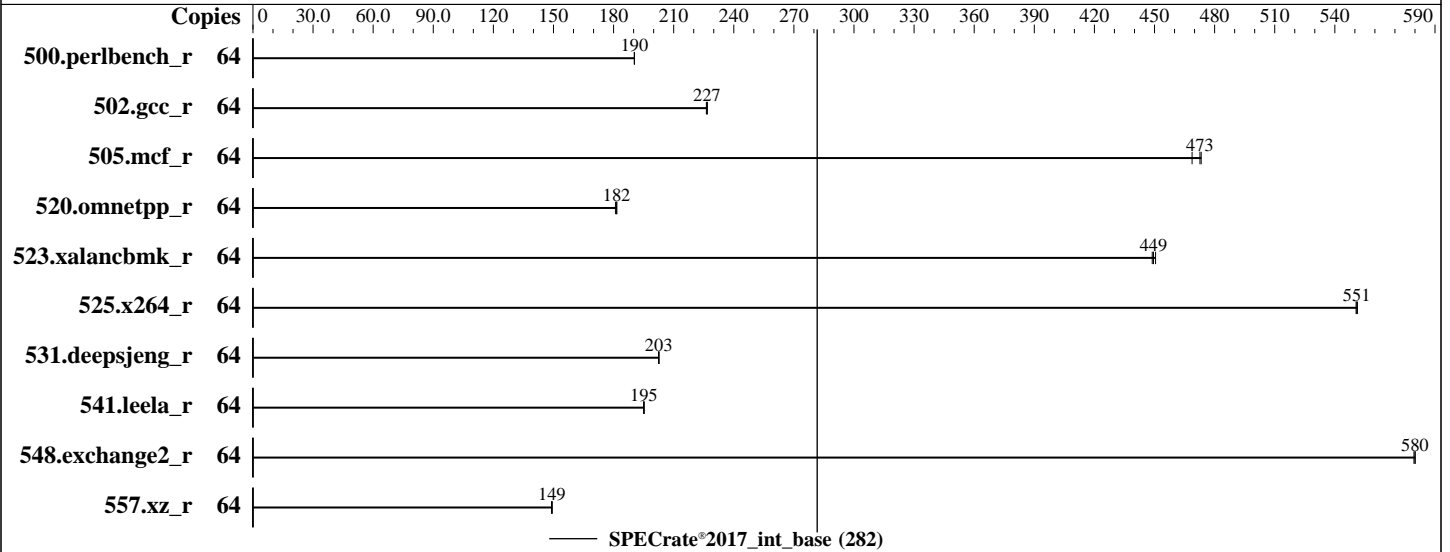

Hardware

CPU Name: Intel Xeon Gold 6326
Max MHz: 3500
Nominal: 2900
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 24 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)
4.18.0-305.el8.x86_64
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.35 Released Feb-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	535	190	535	190	535	190							
502.gcc_r	64	400	227	400	227	400	226							
505.mcf_r	64	221	469	219	473	219	473							
520.omnetpp_r	64	462	182	463	182	464	181							
523.xalancbmk_r	64	150	451	151	449	150	449							
525.x264_r	64	203	551	203	551	204	551							
531.deepsjeng_r	64	362	203	362	203	362	203							
541.leela_r	64	543	195	543	195	544	195							
548.exchange2_r	64	289	579	289	580	289	580							
557.xz_r	64	464	149	463	149	463	149							

SPECrate®2017_int_base = 282

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017_1.19/lib/intel64:/spec2017_1.19/lib/ia32:/spec2017_1.19/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017_1.19/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sat Mar 25 19:37:58 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 239 (239-45.el8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

1. uname -a
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86_64 x86_64 x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

GNU/Linux

```
-----
2. w
  19:37:58 up 3 days, 4:26,  2 users,  load average: 50.16, 60.63, 62.56
USER   TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root   tty1     -                Wed15    27:59m 1.40s  0.13s  -bash
root   pts/0    70.167.0.2       Thu05    37:35m 0.12s  0.12s  -bash
```

```
-----
3. Username
  From environment variable $USER:  root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2060065
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060065
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 17
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 64 -c ic2022.1-lin-core-avx512-rate-20220316.cfg --define
smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base -o all intrate
runcpu --define default-platform-flags --copies 64 --configfile ic2022.1-lin-core-avx512-rate-20220316.cfg
--define smt-on --define cores=32 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base --output_format all --nopower --runmode rate --tune base --size refrate intrate
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.045/temlogs/preenv.intrate.045.0.log --lognum 045.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017_1.19
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6326 CPU @ 2.90GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping      : 6
microcode     : 0xd000363
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 16
siblings      : 32
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 64-95

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:    2
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Gold 6326 CPU @ 2.90GHz
BIOS Model name:      Intel(R) Xeon(R) Gold 6326 CPU @ 2.90GHz
Stepping:              6
CPU MHz:               3300.000
BogoMIPS:              5800.00
Virtualization:       VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              24576K
NUMA node0 CPU(s):    0-7,32-39
NUMA node1 CPU(s):    8-15,40-47
NUMA node2 CPU(s):    16-23,48-55
NUMA node3 CPU(s):    24-31,56-63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
pconfig flush_lld arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 127994 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

```

node 0 free: 122354 MB
node 1 cpus: 8-15,40-47
node 1 size: 129020 MB
node 1 free: 125081 MB
node 2 cpus: 16-23,48-55
node 2 size: 129020 MB
node 2 free: 124825 MB
node 3 cpus: 24-31,56-63
node 3 size: 129017 MB
node 3 free: 124551 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

```

-----
9. /proc/meminfo
   MemTotal:      527414240 kB

```

```

-----
10. who -r
    run-level 3 Mar 22 15:11

```

```

-----
11. Systemd service manager version: systemd 239 (239-45.e18)
    Default Target Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
           crond firewalld getty@ import-state irqbalance iscsi iscsi-onboot kdump libstoragemgmt
           loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
           nvme-fc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog
           sysstat timedatex tuned udisks2 vdo
disabled   arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables httpd httpd@
           iprdump iprprint iprupdate ipsec iscsid iscsiuiop kpatch kvm_stat ledmon nftables nvme-fc-autoconnect
           oddjobd phoromatic-client phoromatic-server phoronix-result-server php-fpm pmcd pmfind pmie
           pmie_check pmlogger pmlogger_check pmproxy psacct rdisc rhcd rhsm rhsm-facts serial-getty@ snmpd
           snmptrapd sshd-keygen@ systemd-resolved tcscd
generated  SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
           gcc-toolset-9-stap-server gcc-toolset-9-systemtap mst scripts startup
indirect   sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked     systemd-timedated

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-4.18.0-305.el8.x86_64
root=UUID=9304e5cd-2e1d-48f6-9359-484ddf980c8a
ro
crashkernel=auto
resume=UUID=aff4e6f4-0757-4e74-b0fd-4e11814d5ccb
rhgb
quiet

```

```

-----
14. cpupower frequency-info

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

```
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
    Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     0
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release Red Hat Enterprise Linux release 8.4 (Ootpa)
```

```
-----
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit      Not affected
l1tf                Not affected
mds                 Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Platform Notes (Continued)

meltdown	Not affected
spec_store_bypass	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1	Mitigation: usercopy/swaps barriers and __user pointer sanitization
spectre_v2	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds	Not affected
tsx_async_abort	Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information

SPEC is set to: /spec2017_1.19

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xtfs	859G	131G	729G	16%	/

22. /sys/devices/virtual/dmi/id

Vendor:	XFUSION
Product:	2288H V6
Product Family:	Whitley
Serial:	Serial

23. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	XFUSION
BIOS Version:	1.35
BIOS Date:	02/14/2023
BIOS Revision:	1.35

Compiler Version Notes

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 282

xFusion 2288H V6 (Intel Xeon Gold 6326)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-25 19:37:58-0400.

Report generated on 2024-01-29 17:30:17 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-11.