



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

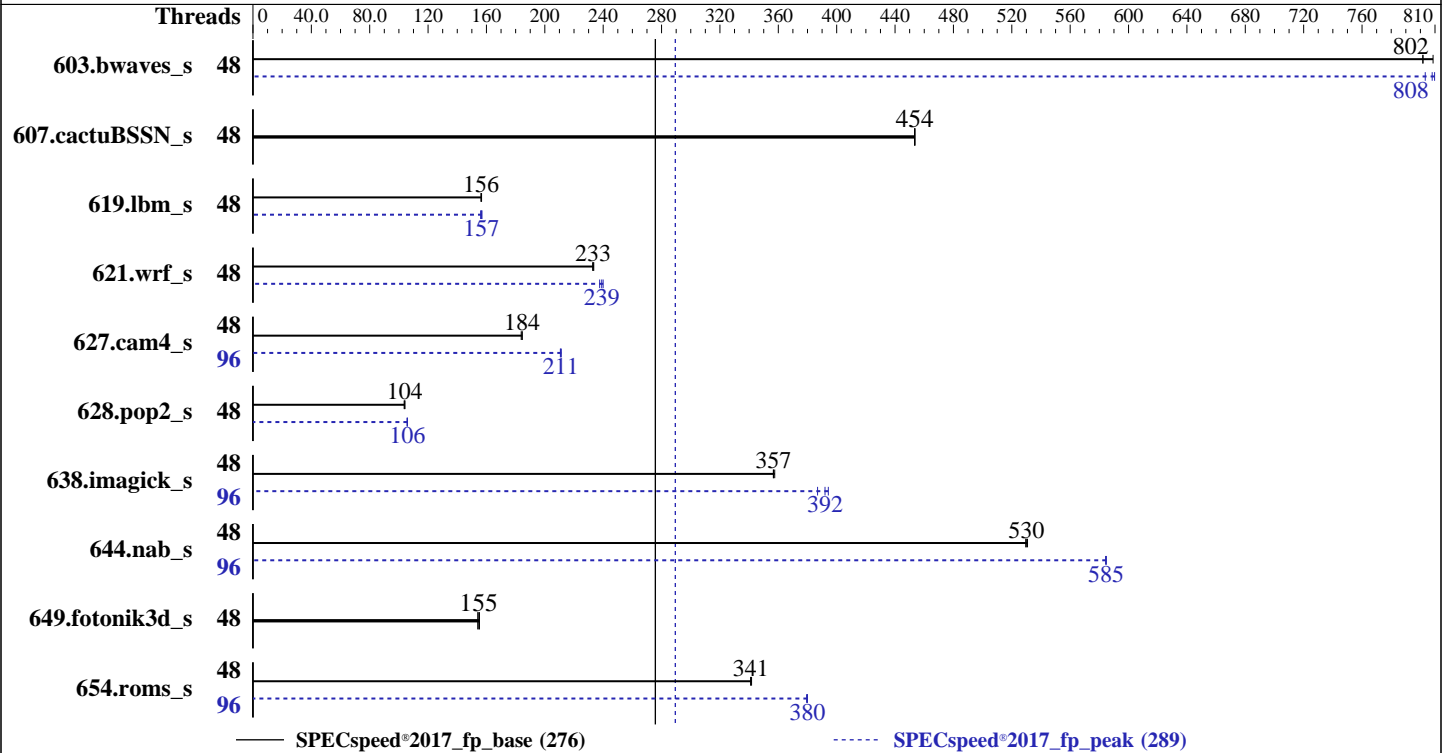

### Hardware

CPU Name: AMD EPYC 9474F  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 48 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 6 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version KAE109F 1.40 released Feb-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	73.0	809	73.6	802	<b><u>73.6</u></b>	<b><u>802</u></b>	48	73.4	803	72.9	810	<b><u>73.0</u></b>	<b><u>808</u></b>
607.cactuBSSN_s	48	36.8	453	36.7	454	<b><u>36.8</u></b>	<b><u>454</u></b>	48	36.8	453	36.7	454	<b><u>36.8</u></b>	<b><u>454</u></b>
619.lbm_s	48	33.4	157	<b><u>33.5</u></b>	<b><u>156</u></b>	33.5	156	48	33.6	156	<b><u>33.5</u></b>	<b><u>157</u></b>	33.4	157
621.wrf_s	48	<b><u>56.7</u></b>	<b><u>233</u></b>	56.6	234	56.8	233	48	55.7	238	<b><u>55.3</u></b>	<b><u>239</u></b>	55.1	240
627.cam4_s	48	48.0	184	<b><u>48.1</u></b>	<b><u>184</u></b>	48.2	184	96	42.1	211	<b><u>42.0</u></b>	<b><u>211</u></b>	42.0	211
628.pop2_s	48	115	104	<b><u>114</u></b>	<b><u>104</u></b>	114	104	48	<b><u>112</u></b>	<b><u>106</u></b>	112	106	112	106
638.imagick_s	48	40.5	357	40.3	358	<b><u>40.4</u></b>	<b><u>357</u></b>	96	<b><u>36.8</u></b>	<b><u>392</u></b>	37.3	387	36.6	394
644.nab_s	48	<b><u>33.0</u></b>	<b><u>530</u></b>	32.9	531	33.0	530	96	29.9	584	<b><u>29.9</u></b>	<b><u>585</u></b>	29.9	585
649.fotonik3d_s	48	<b><u>58.9</u></b>	<b><u>155</u></b>	59.2	154	58.7	155	48	<b><u>58.9</u></b>	<b><u>155</u></b>	59.2	154	58.7	155
654.roms_s	48	<b><u>46.1</u></b>	<b><u>341</u></b>	46.1	342	46.2	341	96	<b><u>41.4</u></b>	<b><u>380</u></b>	41.4	380	41.5	379

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017

**Test Date:** Mar-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To always enable THP for peak runs of:  
603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To disable THP for peak runs of 621.wrf\_s:  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To enable THP only on request for peak runs of 654.roms\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-95"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.9-amd-aocc400-genoa-Ble/amd\_speed\_aocc400\_genoa\_B\_lib  
/lib:"  
LIBBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "96"  
  
Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"  
  
Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"  
  
Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"  
  
Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"  
  
Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"  
  
Environment variables set by runcpu during the 638.imagick\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Environment Variables Notes (Continued)

Environment variables set by runcpu during the 644.nab\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 48 1 49 2 50 3 51 4 52 5 53 6 54 7 55 8 56 9 57 10 58  
11 59 12 60 13 61 14 62 15 63 16 64 17 65 18 66 19 67 20 68 21 69 22 70  
23 71 24 72 25 73 26 74 27 75 28 76 29 77 30 78 31 79 32 80 33 81 34 82  
35 83 36 84 37 85 38 86 39 87 40 88 41 89 42 90 43 91 44 92 45 93 46 94  
47 95"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-genoa-Ble/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Mar 14 17:47:09 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 17:47:09 up 27 min,  1 user,  load average: 0.16, 0.12, 0.04
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      tty1    -              17:41      37.00s   1.61s   0.54s  /bin/bash ./amd_speed_aocc400_genoa_B1.sh

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1545937
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1545937

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.078/templogs/preenv.fpspeed.078.0.log --lognum 078.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-genoa-B1e

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9474F 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101111
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 48
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

On-line CPU(s) list:          0-95
Vendor ID:                   AuthenticAMD
Model name:                  AMD EPYC 9474F 48-Core Processor
CPU family:                  25
Model:                       17
Thread(s) per core:         2
Core(s) per socket:         48
Socket(s):                   1
Stepping:                    1
Frequency boost:             enabled
CPU max MHz:                 4113.2808
CPU min MHz:                 1500.0000
BogoMIPS:                    7188.84
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                               clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                               constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                               pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                               popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                               abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                               perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                               invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                               avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                               avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                               xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                               svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                               pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                               umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                               avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:              AMD-V
L1d cache:                   1.5 MiB (48 instances)
L1i cache:                   1.5 MiB (48 instances)
L2 cache:                     48 MiB (48 instances)
L3 cache:                     256 MiB (8 instances)
NUMA node(s):                1
NUMA node0 CPU(s):          0-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                               filling
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-95
node 0 size: 386508 MB
node 0 free: 385183 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 395784348 kB

10. who -r

run-level 3 Mar 14 17:19

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=3bbe645f-e8ac-484d-b283-98c451feb714
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.60 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent\_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none            511
   max_ptes_shared          256
   max_ptes_swap            64
   pages_to_scan            4096
   scan_sleep_millisecs     10000

```

```

-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
   SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-genoa-Ble
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda3       xfs   446G  54G  393G  12% /

```

```

-----
20. /sys/devices/virtual/dmi/id
   Vendor:           Lenovo
   Product:          ThinkSystem SR635V3
   Product Family:  ThinkSystem
   Serial:           1234567890

```

```

-----
21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     3x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
     8x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
     1x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

```

```

-----
22. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:           Lenovo
   BIOS Version:          KAE109F-1.40
   BIOS Date:             02/27/2023

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

BIOS Revision: 1.40  
Firmware Revision: 1.40

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)

```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)

```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Nov-2022

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 276

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Date: Mar-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick\_s: Same as 619.lbm\_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

627.cam4\_s (continued):

```
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-R.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-R.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.60 GHz,AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 276

SPECspeed®2017\_fp\_peak = 289

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Nov-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-14 05:47:09-0400.  
Report generated on 2023-04-12 12:46:24 by CPU2017 PDF formatter v6442.  
Originally published on 2023-04-11.