



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

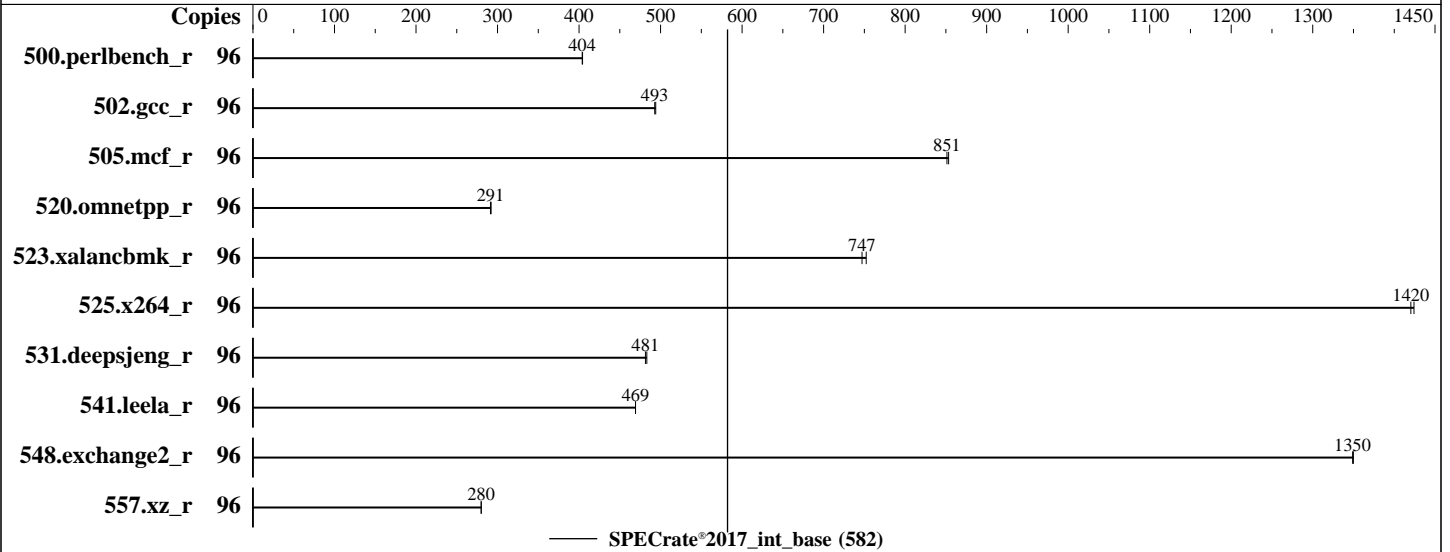

Hardware

CPU Name: AMD EPYC 9254
 Max MHz: 4150
 Nominal: 2900
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 5.15.0-60-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.3.7 released Mar-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Feb-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	378	404	378	404									
502.gcc_r	96	276	493	275	494									
505.mcf_r	96	182	851	182	853									
520.omnetpp_r	96	431	292	432	291									
523.xalancbmk_r	96	136	747	135	752									
525.x264_r	96	118	1420	118	1420									
531.deepsjeng_r	96	229	481	228	483									
541.leela_r	96	339	469	339	469									
548.exchange2_r	96	186	1350	186	1350									
557.xz_r	96	370	280	370	280									

SPECrate®2017_int_base = 582

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_rate_aocc400_genoa_B_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 4
L3 Cache as NUMA Domain : Enabled
```

```
System Profile : Custom
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on ubuntu-genoa Wed Mar 15 16:52:52 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Platform Notes (Continued)

- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux ubuntu-genoa 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64 x86_64 x86_64
GNU/Linux
```

```
-----
2. w
 16:52:52 up 29 min,  1 user,  load average: 0.49, 0.14, 0.12
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      ttyl    -                16:48   49.00s 1.58s  0.26s /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
-----
3. Username
From environment variable $USER:  root
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6190469
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-specrate.sh --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --nopower --runmode rate --tune base --size
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Platform Notes (Continued)

```

test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9254 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0 : core ids 0-5,8-13,16-21,24-29
physical id 1 : core ids 0-5,8-13,16-21,24-29
physical id 0 : apicids 0-11,16-27,32-43,48-59
physical id 1 : apicids 64-75,80-91,96-107,112-123

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9254 24-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:           4151.7568
CPU min MHz:           1500.0000
BogoMIPS:               5801.82
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Platform Notes (Continued)

lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

Virtualization: AMD-V

L1d cache: 1.5 MiB (48 instances)

L1i cache: 1.5 MiB (48 instances)

L2 cache: 48 MiB (48 instances)

L3 cache: 256 MiB (8 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-5,48-53

NUMA node1 CPU(s): 12-17,60-65

NUMA node2 CPU(s): 18-23,66-71

NUMA node3 CPU(s): 6-11,54-59

NUMA node4 CPU(s): 24-29,72-77

NUMA node5 CPU(s): 36-41,84-89

NUMA node6 CPU(s): 42-47,90-95

NUMA node7 CPU(s): 30-35,78-83

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5,48-53

node 0 size: 193043 MB

node 0 free: 192536 MB

node 1 cpus: 12-17,60-65

node 1 size: 193532 MB

node 1 free: 193028 MB

node 2 cpus: 18-23,66-71

node 2 size: 193532 MB

node 2 free: 193088 MB

node 3 cpus: 6-11,54-59

node 3 size: 193516 MB

node 3 free: 189491 MB

node 4 cpus: 24-29,72-77

node 4 size: 193532 MB

node 4 free: 193161 MB

node 5 cpus: 36-41,84-89

node 5 size: 193532 MB

node 5 free: 193189 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Platform Notes (Continued)

```

node 6 cpus: 42-47,90-95
node 6 size: 193532 MB
node 6 free: 193189 MB
node 7 cpus: 30-35,78-83
node 7 size: 193506 MB
node 7 free: 193166 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584873880 kB

```

```

-----
10. who -r
    run-level 5 Mar 15 16:25

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
    Default Target Status
    graphical          degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

```

```

-----
13. Services, from systemctl list-unit-files
    STATE     UNIT FILES
enabled     ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
            cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
            grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
            lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
            secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
            systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
            ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled     console-getty debug-shell iscsid nftables rsync serial-getty@
            systemd-boot-check-no-failures systemd-network-generator systemd-sysext
            systemd-time-wait-sync upower
generated    apport
indirect     uuuid
masked       cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
            x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/vmlinuz-5.15.0-60-generic
    root=/dev/mapper/ubuntu--vg-ubuntu--lv
    ro

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Platform Notes (Continued)

```

15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2900MHz

```

```

16. tuned-adm active
  Current active profile: latency-performance

```

```

17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

```

```

18. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.1 LTS

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Platform Notes (Continued)

21. Disk information

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.5G 122G   3% /mnt/ramdisk

```

22. /sys/devices/virtual/dmi/id

```

Vendor:         Dell Inc.
Product:        PowerEdge R7625
Product Family: PowerEdge
Serial:         1234567

```

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
2x 80CE000080CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
22x 80CE000080CE M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:    Dell Inc.
BIOS Version:   1.3.7
BIOS Date:      03/06/2023
BIOS Revision: 1.3

```

Compiler Version Notes

```

=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

```

```

=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

```

```

=====
Fortran   | 548.exchange2_r(base)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Feb-2023

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 582

PowerEdge R7625 (AMD EPYC 9254 24-Core Processor)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-15 12:52:51-0400.

Report generated on 2023-05-09 15:56:54 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.