



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358


Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

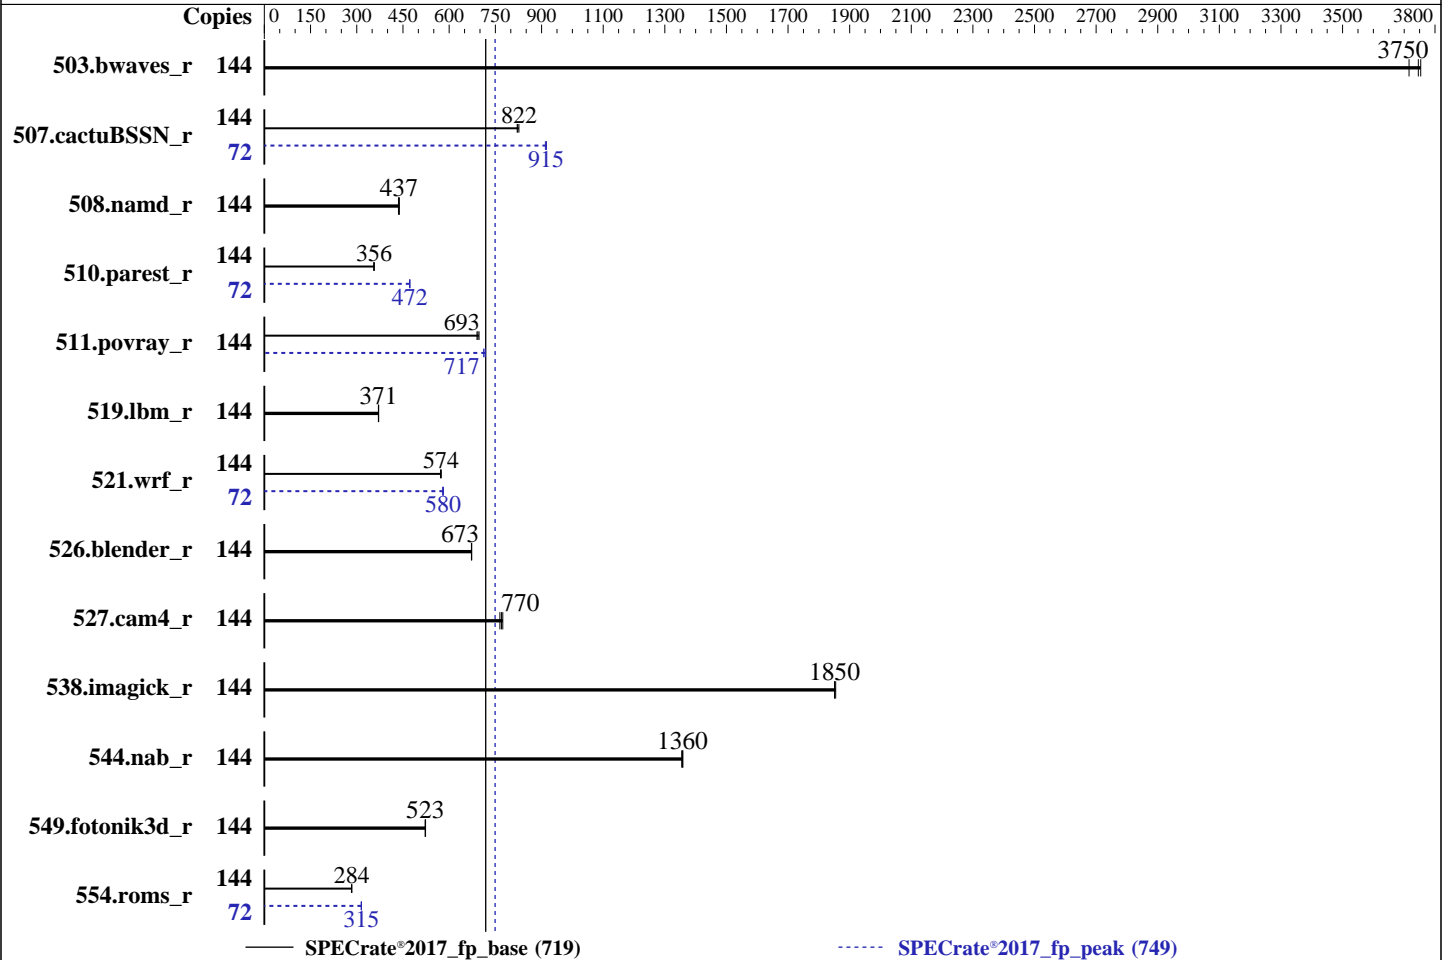

## Hardware

CPU Name: Intel Xeon Platinum 8452Y  
 Max MHz: 3200  
 Nominal: 2000  
 Enabled: 72 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 67.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.22.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 03.01.00 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	389	3720	<b>385</b>	<b>3750</b>	385	3750	144	389	3720	<b>385</b>	<b>3750</b>	385	3750
507.cactuBSSN_r	144	222	821	221	826	<b>222</b>	<b>822</b>	72	<b>99.6</b>	<b>915</b>	99.9	912	99.5	916
508.namd_r	144	314	435	312	438	<b>313</b>	<b>437</b>	144	314	435	312	438	<b>313</b>	<b>437</b>
510.parest_r	144	<b>1058</b>	<b>356</b>	1060	355	1055	357	72	399	472	<b>399</b>	<b>472</b>	399	472
511.povray_r	144	<b>485</b>	<b>693</b>	487	690	482	697	144	469	717	<b>469</b>	<b>717</b>	472	712
519.lbm_r	144	410	370	<b>410</b>	<b>371</b>	409	371	144	410	370	<b>410</b>	<b>371</b>	409	371
521.wrf_r	144	564	572	562	574	<b>562</b>	<b>574</b>	72	278	581	279	579	<b>278</b>	<b>580</b>
526.blender_r	144	326	672	<b>326</b>	<b>673</b>	326	673	144	326	672	<b>326</b>	<b>673</b>	326	673
527.cam4_r	144	<b>327</b>	<b>770</b>	325	774	329	765	144	<b>327</b>	<b>770</b>	325	774	329	765
538.imagick_r	144	193	1850	193	1850	<b>193</b>	<b>1850</b>	144	193	1850	193	1850	<b>193</b>	<b>1850</b>
544.nab_r	144	179	1350	178	1360	<b>179</b>	<b>1360</b>	144	179	1350	178	1360	<b>179</b>	<b>1360</b>
549.fotonik3d_r	144	1072	523	<b>1073</b>	<b>523</b>	1075	522	144	1072	523	<b>1073</b>	<b>523</b>	1075	522
554.roms_r	144	809	283	805	284	<b>807</b>	<b>284</b>	72	<b>363</b>	<b>315</b>	363	315	363	315

SPECrate®2017\_fp\_base = 719

SPECrate®2017\_fp\_peak = 749

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Date:** Apr-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Apr-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Feb-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Apr 6 11:47:04 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a  
Linux localhost.localdomain 5.14.0-70.22.1.e19\_0.x86\_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

## Platform Notes (Continued)

11:47:04 up 6:28, 1 user, load average: 90.58, 130.36, 137.88

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	05:19	6:26m	1.16s	0.01s	-bash

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062130
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062130
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.030/templogs/preenv.fprate.030.0.log --lognum 030.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8452Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000130
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 36
siblings       : 72
2 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-35
physical id 1: core ids 0-35
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

## Platform Notes (Continued)

physical id 0: apicids 0-71  
physical id 1: apicids 128-199

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                144
On-line CPU(s) list:  0-143
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8452Y
BIOS Model name:      Intel(R) Xeon(R) Platinum 8452Y
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   36
Socket(s):             2
Stepping:              6
CPU max MHz:           3200.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm dca sse4_1 sse4_2 x2apic
                      movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                      3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                      cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                      wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                      avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                      avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
                      cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                      arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:             3.4 MiB (72 instances)
L1i cache:             2.3 MiB (72 instances)
L2 cache:              144 MiB (72 instances)
L3 cache:              135 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-8,72-80
NUMA node1 CPU(s):    9-17,81-89
NUMA node2 CPU(s):    18-26,90-98
NUMA node3 CPU(s):    27-35,99-107
NUMA node4 CPU(s):    36-44,108-116
NUMA node5 CPU(s):    45-53,117-125
NUMA node6 CPU(s):    54-62,126-134
NUMA node7 CPU(s):    63-71,135-143
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

## Platform Notes (Continued)

Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	67.5M	135M	15	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-8,72-80
node 0 size: 64072 MB
node 0 free: 53854 MB
node 1 cpus: 9-17,81-89
node 1 size: 64508 MB
node 1 free: 56924 MB
node 2 cpus: 18-26,90-98
node 2 size: 64508 MB
node 2 free: 56912 MB
node 3 cpus: 27-35,99-107
node 3 size: 64508 MB
node 3 free: 56919 MB
node 4 cpus: 36-44,108-116
node 4 size: 64471 MB
node 4 free: 56860 MB
node 5 cpus: 45-53,117-125
node 5 size: 64508 MB
node 5 free: 56913 MB
node 6 cpus: 54-62,126-134
node 6 size: 64508 MB
node 6 free: 56908 MB
node 7 cpus: 63-71,135-143
node 7 size: 64488 MB
node 7 free: 56890 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 527946372 kB

10. who -r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

## Platform Notes (Continued)

run-level 3 Apr 6 05:19

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables podman podman-auto-update podman-restart rdisc rhsm rhsm-facts rpmbd-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

15. cpupower frequency-info

analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Date:** Apr-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Apr-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Feb-2023

## Platform Notes (Continued)

```

vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  224G  595G  28% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         IEI
Product:        NF5180M7
Product Family: Not specified
Serial:         000000000

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     03.01.00

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

CPU2017 License: 3358

Test Date: Apr-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Feb-2023

## Platform Notes (Continued)

BIOS Date: 12/29/2022

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Test Date:** Apr-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Feb-2023

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Date:** Apr-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Apr-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Feb-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Date:** Apr-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Apr-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Feb-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Date:** Apr-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Apr-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Feb-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_fp\_base = 719

NF5180M7 (Intel Xeon Platinum 8452Y)

SPECrate®2017\_fp\_peak = 749

**CPU2017 License:** 3358

**Test Date:** Apr-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Apr-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Feb-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-06 11:47:04-0400.

Report generated on 2023-05-09 16:01:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.