SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 966

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

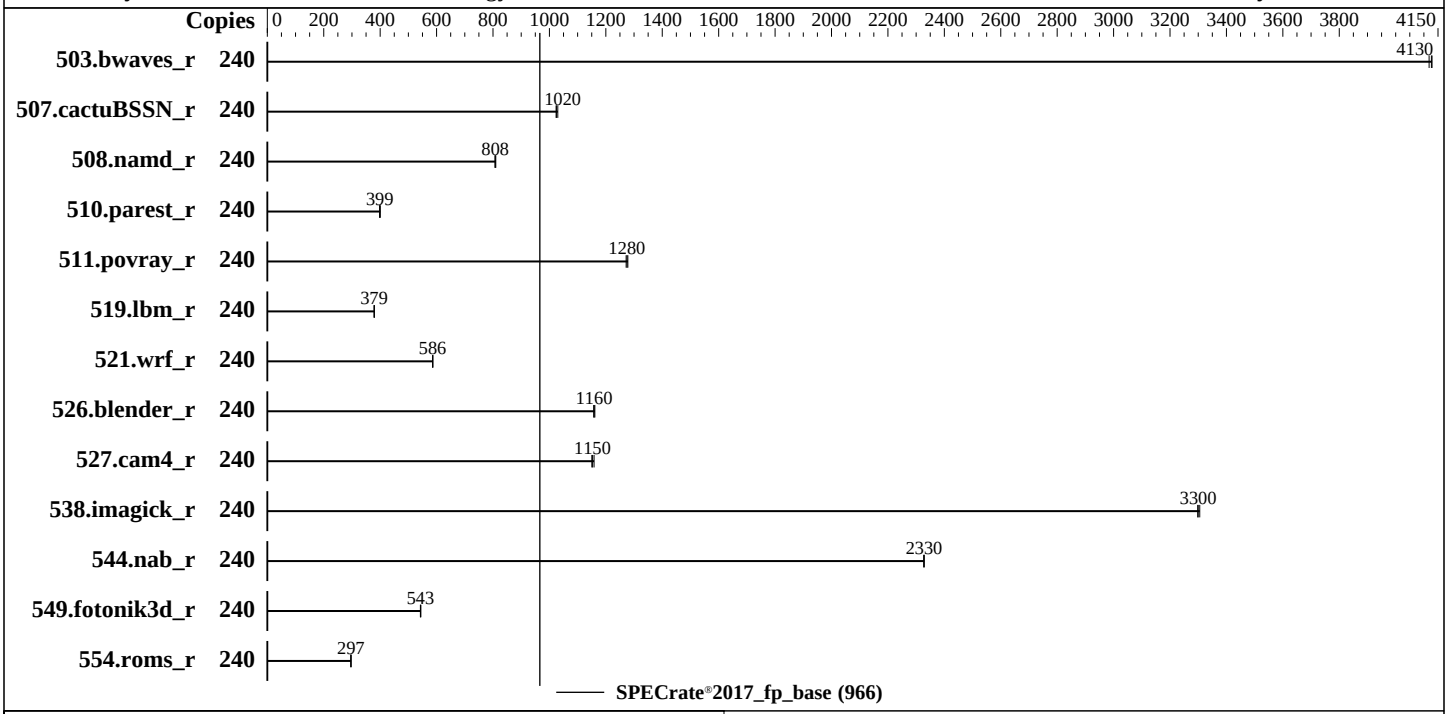

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.84 TB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version T8E120T 0.36 released Feb-2023
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

Wentian WR5220 G3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 966

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	240	583	4130	**583**	**4130**	584	4120							
507.cactuBSSN_r	240	**297**	**1020**	295	1030	297	1020							
508.namd_r	240	282	810	282	807	**282**	**808**							
510.parest_r	240	1578	398	**1574**	**399**	1568	400							
511.povray_r	240	438	1280	**439**	**1280**	441	1270							
519.lbm_r	240	668	379	667	379	**667**	**379**							
521.wrf_r	240	917	586	916	587	**917**	**586**							
526.blender_r	240	315	1160	**315**	**1160**	316	1160							
527.cam4_r	240	365	1150	362	1160	**364**	**1150**							
538.imagick_r	240	181	3310	**181**	**3300**	181	3300							
544.nab_r	240	**174**	**2330**	174	2330	173	2330							
549.fotonik3d_r	240	1718	544	**1722**	**543**	1724	543							
554.roms_r	240	**1286**	**297**	1288	296	1285	297							

SPECrate®2017_fp_base = 966

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu_report/lib/intel64:/home/cpu_report/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Power Mode set to Custom
SNC set to Enable SNC4 (4-clusters)
LLC Prefetch set to Enabled
DCU Streamer Prefetcher set to Disabled
C1 Enhanced Mode set to Disabled
Patrol Scrub set to Disabled
Intel Virtualization Technology set to Disabled
Package C State set to C0/C1 state

Sysinfo program /home/cpu_report/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Apr 18 01:29:18 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
2. w
   01:29:18 up 10:29,  1 user,  load average: 166.54, 221.50, 231.79
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        15:09   ?xdm?  37:15   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4124555
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4124555
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=120 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu_report

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 60
    siblings        : 120
```

(Continued on next page)

Platform Notes (Continued)

```
     2 physical ids (chips)
     240 processors (hardware threads)
     physical id 0: core ids 0-59
     physical id 1: core ids 0-59
     physical id 0: apicids 0-119
     physical id 1: apicids 128-247
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          240
   On-line CPU(s) list:             0-239
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) Platinum 8490H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8490H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              60
   Socket(s):                       2
   Stepping:                        6
   CPU max MHz:                     3500.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        3800.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                    x2apic movbe popcnt tsc_deadline_timer xsave avx f16c rdrand lahf_lm abm
                                    3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                    tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                    rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                                    avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                    cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                                    wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vpclmulqdq avx512_vnni
                                    avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                                    movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                                    avx512_fp16 amx_tile flush_l1d arch_capabilities
   L1d cache:                       5.6 MiB (120 instances)
   L1i cache:                       3.8 MiB (120 instances)
   L2 cache:                        240 MiB (120 instances)
   L3 cache:                        225 MiB (2 instances)
   NUMA node(s):                    8
   NUMA node0 CPU(s):               0-14,120-134
   NUMA node1 CPU(s):               15-29,135-149
   NUMA node2 CPU(s):               30-44,150-164
   NUMA node3 CPU(s):               45-59,165-179
   NUMA node4 CPU(s):               60-74,180-194
   NUMA node5 CPU(s):               75-89,195-209
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node6 CPU(s):               90-104,210-224
  NUMA node7 CPU(s):               105-119,225-239
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.6M   12 Data            1     64        1             64
     L1i       32K     3.8M    8 Instruction     1     64        1             64
     L2         2M     240M   16 Unified         2   2048        1             64
     L3     112.5M     225M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-14,120-134
  node 0 size: 128131 MB
  node 0 free: 109880 MB
  node 1 cpus: 15-29,135-149
  node 1 size: 129017 MB
  node 1 free: 114739 MB
  node 2 cpus: 30-44,150-164
  node 2 size: 129017 MB
  node 2 free: 114749 MB
  node 3 cpus: 45-59,165-179
  node 3 size: 129017 MB
  node 3 free: 114712 MB
  node 4 cpus: 60-74,180-194
  node 4 size: 129017 MB
  node 4 free: 114421 MB
  node 5 cpus: 75-89,195-209
  node 5 size: 128981 MB
  node 5 free: 113427 MB
  node 6 cpus: 90-104,210-224
  node 6 size: 129017 MB
  node 6 free: 114735 MB
  node 7 cpus: 105-119,225-239
  node 7 size: 128997 MB
  node 7 free: 114301 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
    MemTotal:       1055946492 kB

------------------------------------------------------------
10. who -r
  run-level 5 Apr 17 15:00

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                   gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                   lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
                   nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger
                   power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
                   selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat
                   systemd-network-generator udisks2 upower vgauthd virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                   dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd
                   httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
                   libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
                   nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
                   podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
                   rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
                   snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                   targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd
                   virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect         pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   virtlockd virtlogd vsftpd@

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt6)/boot/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=UUID=0fcc2b80-3b7a-487a-8bd6-e3cddec3d533
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=UUID=d8abe978-c0ca-4381-ac68-dadfc58fd1c9
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
```

(Continued on next page)

Platform Notes (Continued)

```
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu_report
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda6      xfs   954G  154G  800G  17% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        Lenovo WenTian GB5520 V3
    Product Family: Lenovo
    Serial:         J80007RK

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
```

(Continued on next page)

Platform Notes (Continued)

```
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
     13x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
     1x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       LENOVO
    BIOS Version:      T8E120T-0.36
    BIOS Date:         02/13/2023
    BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-WR5220-G3-R.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-WR5220-G3-R.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-17 13:29:17-0400.
Report generated on 2023-05-23 19:10:44 by CPU2017 PS formatter v6716.
Originally published on 2023-05-23.