



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

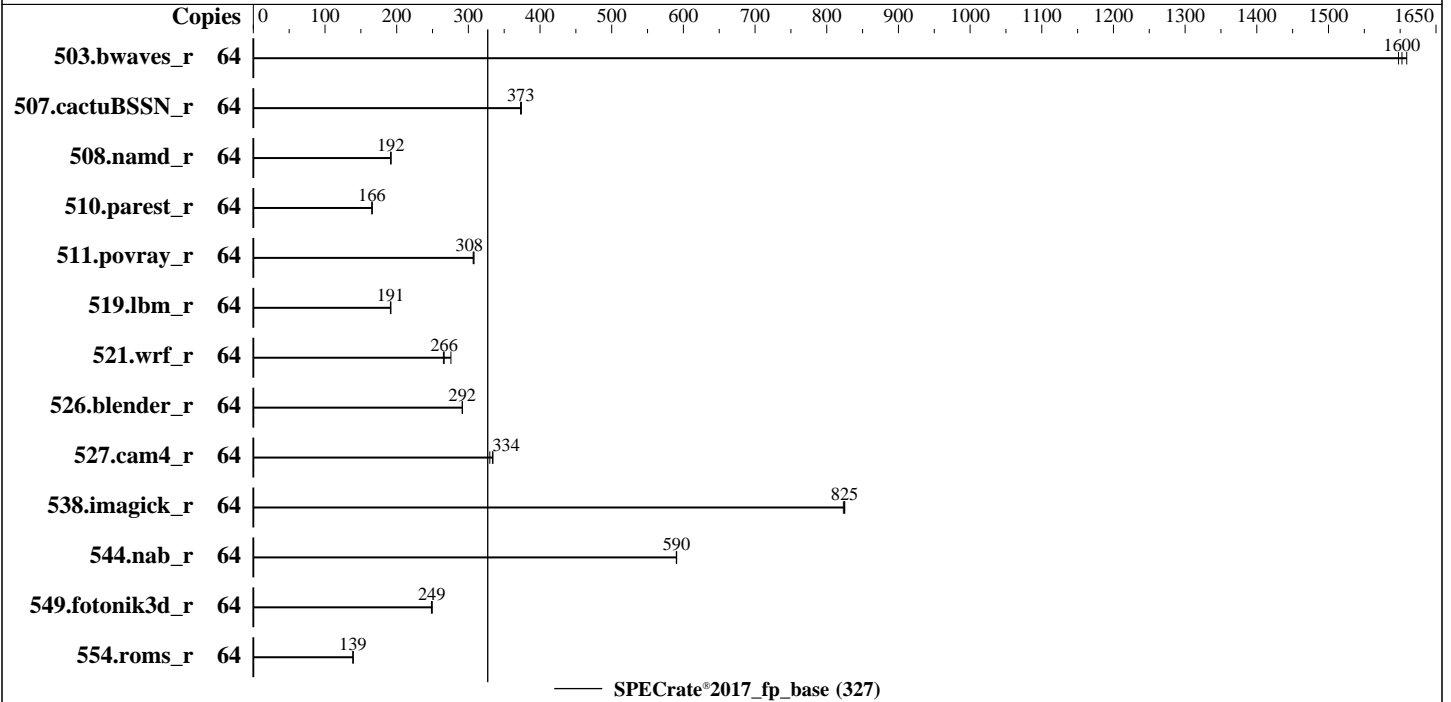

### Hardware

CPU Name: Intel Xeon Gold 6414U  
 Max MHz: 3400  
 Nominal: 2000  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version ESE113G 2.10 released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	399	1610	<b>400</b>	<b>1600</b>	402	1600							
507.cactuBSSN_r	64	217	374	217	373	<b>217</b>	<b>373</b>							
508.namd_r	64	<b>317</b>	<b>192</b>	317	192	317	192							
510.parest_r	64	<b>1011</b>	<b>166</b>	1011	166	1010	166							
511.povray_r	64	487	307	486	308	<b>486</b>	<b>308</b>							
519.lbm_r	64	353	191	<b>352</b>	<b>191</b>	351	192							
521.wrf_r	64	520	276	541	265	<b>538</b>	<b>266</b>							
526.blender_r	64	334	291	<b>334</b>	<b>292</b>	334	292							
527.cam4_r	64	<b>336</b>	<b>334</b>	339	330	335	334							
538.imagick_r	64	193	823	193	825	<b>193</b>	<b>825</b>							
544.nab_r	64	183	590	182	591	<b>182</b>	<b>590</b>							
549.fotonik3d_r	64	<b>1001</b>	<b>249</b>	1000	250	1004	248							
554.roms_r	64	730	139	731	139	<b>731</b>	<b>139</b>							

SPECrate®2017\_fp\_base = 327

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_base = 327

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
SNC set to SNC2  
LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on test1 Fri Apr 28 00:51:56 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux test1 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
00:51:56 up 2 min, 1 user, load average: 0.31, 0.29, 0.12  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 00:51 7.00s 1.17s 0.00s -bash  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 1030434
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 1030434
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.346/templogs/preenv.fprate.346.0.log --lognum 346.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6414U
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000190
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings        : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-63
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

### Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 6414U
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             1
Stepping:              8
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                      invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                      tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              60 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability MDS:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

Virtualization:

```

VT-x
L1d cache:             1.5 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              64 MiB (32 instances)
L3 cache:              60 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability MDS:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	60M	60M	15	Unified	3	65536	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 128645 MB
node 0 free: 127982 MB
node 1 cpus: 16-31,48-63
node 1 size: 128987 MB
node 1 free: 128462 MB
node distances:
node  0  1
  0:  10  12
  1:  12  10
```

9. /proc/meminfo

```
MemTotal:      263815520 kB
```

10. who -r

```
run-level 3 Apr 28 00:50
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
               issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
               smartd sshd wickd wickedd-auto4 wickedd-dhcup4 wickedd-dhcup6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
               chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
               firewallld gpm grub2-once haveged-switch-root ipmi ipmiev d iscsi-init iscsid iscsiui o
               issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rdisc
               rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
               systemd-boot-check-no-failures systemd-network-generator systemd-sysext
               systemd-time-wait-sync systemd-timesyncd
generated      ntp_sync
indirect        wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f976c541-a329-4c54-ba84-4be16556ee18
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   894G  97G  797G  11% /

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Lenovo
Product:        ThinkSystem SR630 V3
Product Family: ThinkSystem
Serial:         1234567890

-----
21. dmidecode

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

- 1x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
- 7x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      Lenovo
BIOS Version:     ESE113G-2.10
BIOS Date:        03/16/2023
BIOS Revision:    2.10
Firmware Revision: 2.10

```

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

-----  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Base Portability Flags (Continued)

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 327

ThinkSystem SR630 V3  
(2.00 GHz, Intel Xeon Gold 6414U)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-P.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-P.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-27 12:51:55-0400.

Report generated on 2023-05-23 19:12:57 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.