



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

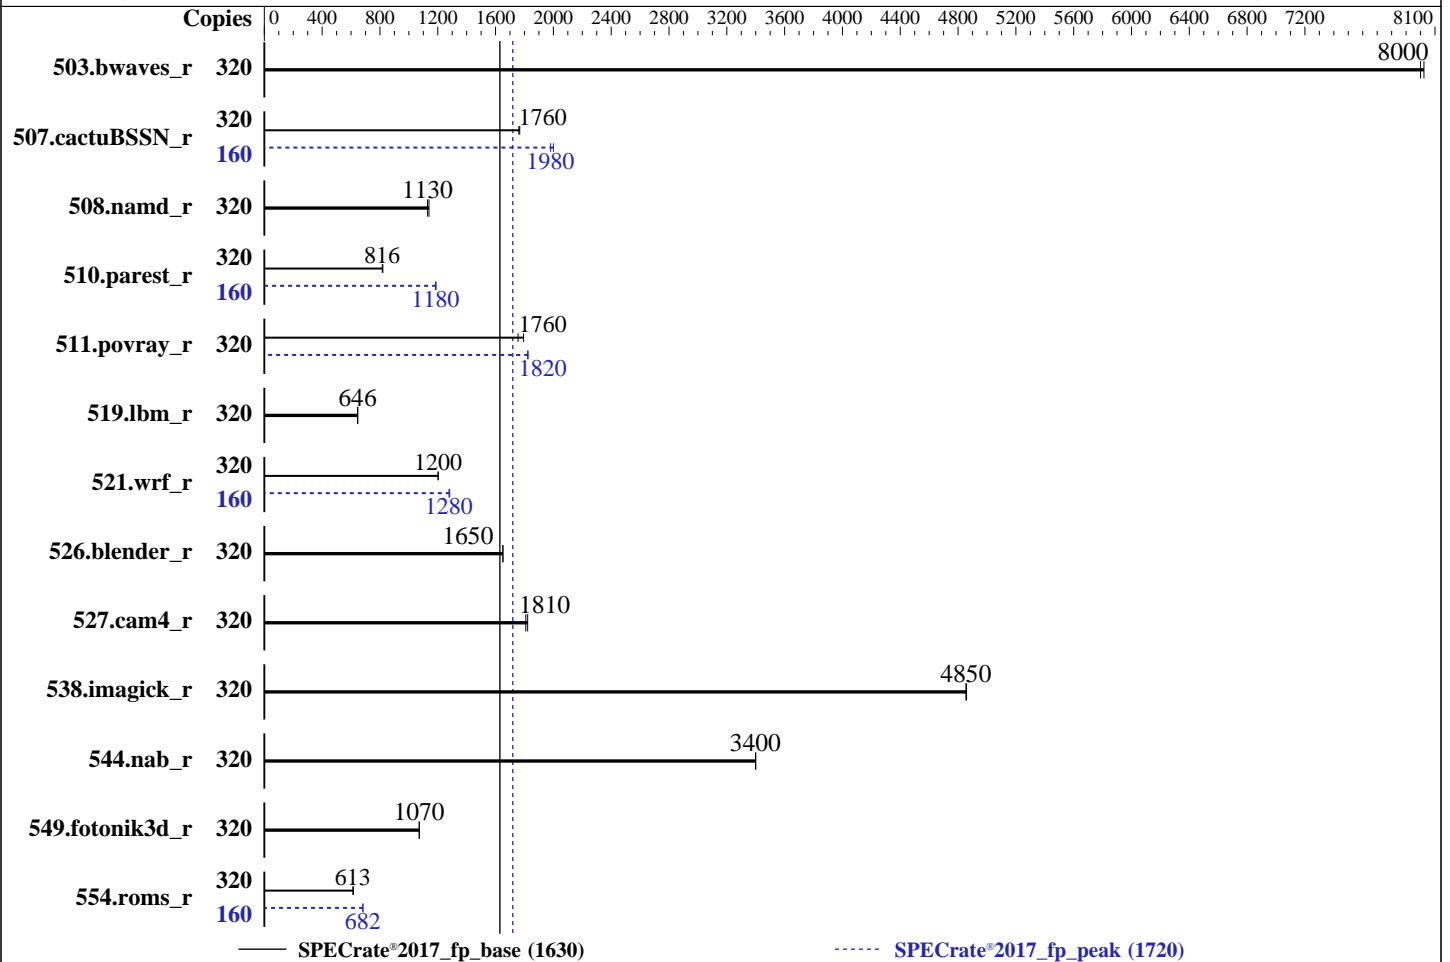

Hardware

CPU Name: Intel Xeon Platinum 8460H
 Max MHz: 3800
 Nominal: 2200
 Enabled: 160 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 160 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.4.0 released Mar-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	320	400	8020	<u>401</u>	<u>8000</u>			320	400	8020	<u>401</u>	<u>8000</u>		
507.cactuBSSN_r	320	<u>230</u>	<u>1760</u>	229	1770			160	<u>102</u>	<u>1980</u>	101	2000		
508.namd_r	320	267	1140	<u>269</u>	<u>1130</u>			320	267	1140	<u>269</u>	<u>1130</u>		
510.parest_r	320	1021	820	<u>1026</u>	<u>816</u>			160	352	1190	<u>353</u>	<u>1180</u>		
511.povray_r	320	417	1790	<u>426</u>	<u>1760</u>			320	409	1830	<u>410</u>	<u>1820</u>		
519.lbm_r	320	522	646	<u>522</u>	<u>646</u>			320	522	646	<u>522</u>	<u>646</u>		
521.wrf_r	320	<u>596</u>	<u>1200</u>	596	1200			160	279	1280	<u>281</u>	<u>1280</u>		
526.blender_r	320	295	1650	<u>295</u>	<u>1650</u>			320	295	1650	<u>295</u>	<u>1650</u>		
527.cam4_r	320	307	1820	<u>309</u>	<u>1810</u>			320	307	1820	<u>309</u>	<u>1810</u>		
538.imagick_r	320	<u>164</u>	<u>4850</u>	164	4860			320	<u>164</u>	<u>4850</u>	164	4860		
544.nab_r	320	<u>158</u>	<u>3400</u>	158	3400			320	<u>158</u>	<u>3400</u>	158	3400		
549.fotonik3d_r	320	1163	1070	<u>1164</u>	<u>1070</u>			320	1163	1070	<u>1164</u>	<u>1070</u>		
554.roms_r	320	825	616	<u>830</u>	<u>613</u>			160	372	683	<u>373</u>	<u>682</u>		

SPECrate®2017_fp_base = 1630

SPECrate®2017_fp_peak = 1720

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 160 GB ramdisk created with the cmd: "mount -t tmpfs -o size=160G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : 4-way Clustering
LLC Prefetch : Disabled
Dead Line LLC Alloc : Disabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
CIE : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Mar 29 23:31:56 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 23:31:56 up 4:10, 1 user, load average: 173.96, 281.76, 302.83
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      :l          19:22  ?xdm?  41:40  0.00s /usr/libexec/gdm-x-session --register-session --run-script
gnome-session

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 8251996
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 8251996
virtual memory                (kbytes, -v) unlimited
file locks                    (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
csv,html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
csv,html,pdf,txt --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8460H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 40
siblings       : 80
4 physical ids (chips)
320 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 2: core ids 0-39
physical id 3: core ids 0-39
physical id 0: apicids 0-79
physical id 1: apicids 128-207
physical id 2: apicids 256-335
physical id 3: apicids 384-463
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                320
On-line CPU(s) list:  0-319
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel
Model name:            Intel(R) Xeon(R) Platinum 8460H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8460H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    40
Socket(s):             4
Stepping:              8
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtptr pdcn pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities

Virtualization:

VT-x
L1d cache: 7.5 MiB (160 instances)
L1i cache: 5 MiB (160 instances)
L2 cache: 320 MiB (160 instances)
L3 cache: 420 MiB (4 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 160, 168, 176, 184, 192, 200, 208, 216, 224, 232
NUMA node1 CPU(s): 80, 88, 96, 104, 112, 120, 128, 136, 144, 152, 240, 248, 256, 264, 272, 280, 288, 296, 304, 312
NUMA node2 CPU(s): 4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 164, 172, 180, 188, 196, 204, 212, 220, 228, 236
NUMA node3 CPU(s): 84, 92, 100, 108, 116, 124, 132, 140, 148, 156, 244, 252, 260, 268, 276, 284, 292, 300, 308, 316
NUMA node4 CPU(s): 1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 161, 169, 177, 185, 193, 201, 209, 217, 225, 233
NUMA node5 CPU(s): 81, 89, 97, 105, 113, 121, 129, 137, 145, 153, 241, 249, 257, 265, 273, 281, 289, 297, 305, 313
NUMA node6 CPU(s): 5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 165, 173, 181, 189, 197, 205, 213, 221, 229, 237
NUMA node7 CPU(s): 85, 93, 101, 109, 117, 125, 133, 141, 149, 157, 245, 253, 261, 269, 277, 285, 293, 301, 309, 317
NUMA node8 CPU(s): 2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 162, 170, 178, 186, 194, 202, 210, 218, 226, 234
NUMA node9 CPU(s): 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 242, 250, 258, 266, 274, 282, 290, 298, 306, 314
NUMA node10 CPU(s): 6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 166, 174, 182, 190, 198, 206, 214, 222, 230, 238
NUMA node11 CPU(s): 86, 94, 102, 110, 118, 126, 134, 142, 150, 158, 246, 254, 262, 270, 278, 286, 294, 302, 310, 318
NUMA node12 CPU(s): 3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 163, 171, 179, 187, 195, 203, 211, 219, 227, 235
NUMA node13 CPU(s): 83, 91, 99, 107, 115, 123, 131, 139, 147, 155, 243, 251, 259, 267, 275, 283, 291, 299, 307, 315
NUMA node14 CPU(s): 7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 167, 175, 183, 191, 199, 207, 215, 223, 231, 239
NUMA node15 CPU(s): 87, 95, 103, 111, 119, 127, 135, 143, 151, 159, 247, 255, 263, 271, 279, 287, 295, 303, 311, 319
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	2M	320M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0,8,16,24,32,40,48,56,64,72,160,168,176,184,192,200,208,216,224,232
node 0 size: 127831 MB
node 0 free: 126008 MB
node 1 cpus: 80,88,96,104,112,120,128,136,144,152,240,248,256,264,272,280,288,296,304,312
node 1 size: 129019 MB
node 1 free: 128089 MB
node 2 cpus: 4,12,20,28,36,44,52,60,68,76,164,172,180,188,196,204,212,220,228,236
node 2 size: 129019 MB
node 2 free: 118957 MB
node 3 cpus: 84,92,100,108,116,124,132,140,148,156,244,252,260,268,276,284,292,300,308,316
node 3 size: 129019 MB
node 3 free: 128137 MB
node 4 cpus: 1,9,17,25,33,41,49,57,65,73,161,169,177,185,193,201,209,217,225,233
node 4 size: 129019 MB
node 4 free: 128135 MB
node 5 cpus: 81,89,97,105,113,121,129,137,145,153,241,249,257,265,273,281,289,297,305,313
node 5 size: 129019 MB
node 5 free: 128149 MB
node 6 cpus: 5,13,21,29,37,45,53,61,69,77,165,173,181,189,197,205,213,221,229,237
node 6 size: 129019 MB
node 6 free: 128122 MB
node 7 cpus: 85,93,101,109,117,125,133,141,149,157,245,253,261,269,277,285,293,301,309,317
node 7 size: 129019 MB
node 7 free: 128115 MB
node 8 cpus: 2,10,18,26,34,42,50,58,66,74,162,170,178,186,194,202,210,218,226,234
node 8 size: 129019 MB
node 8 free: 128049 MB
node 9 cpus: 82,90,98,106,114,122,130,138,146,154,242,250,258,266,274,282,290,298,306,314
node 9 size: 128983 MB
node 9 free: 128111 MB
node 10 cpus: 6,14,22,30,38,46,54,62,70,78,166,174,182,190,198,206,214,222,230,238
node 10 size: 129019 MB
node 10 free: 128133 MB
node 11 cpus: 86,94,102,110,118,126,134,142,150,158,246,254,262,270,278,286,294,302,310,318
node 11 size: 129019 MB
node 11 free: 128161 MB
node 12 cpus: 3,11,19,27,35,43,51,59,67,75,163,171,179,187,195,203,211,219,227,235
node 12 size: 129019 MB
node 12 free: 128162 MB
node 13 cpus: 83,91,99,107,115,123,131,139,147,155,243,251,259,267,275,283,291,299,307,315
node 13 size: 129019 MB
node 13 free: 128130 MB
node 14 cpus: 7,15,23,31,39,47,55,63,71,79,167,175,183,191,199,207,215,223,231,239
node 14 size: 129019 MB
node 14 free: 127936 MB
node 15 cpus: 87,95,103,111,119,127,135,143,151,159,247,255,263,271,279,287,295,303,311,319
node 15 size: 128990 MB
node 15 free: 128126 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4:  21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
5:  21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

6: 21 21 21 21 12 12 10 12 21 21 21 21 21 21 21
7: 21 21 21 21 12 12 12 10 21 21 21 21 21 21 21
8: 21 21 21 21 21 21 21 21 10 12 12 12 21 21 21
9: 21 21 21 21 21 21 21 21 12 10 12 12 21 21 21
10: 21 21 21 21 21 21 21 21 12 12 10 12 21 21 21
11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12
15: 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10

```

```

9. /proc/meminfo
MemTotal:      2112574252 kB

```

```

10. who -r
run-level 5 Mar 29 19:22

```

```

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
graphical      running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd
virtqemud vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltyt canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewallld grafana-server gssproxy
httpd httpd@ ibacm iprdump iprinit ipupdate ipsec iscsid iscsiuiop kpatch kvm_stat ledmon
libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
nfs-server nftables nmb numad nvme-fc-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysextr target
targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodevdev virtnwfilterd
virtproxyd virtsecret virtstoraged vsftpd wpa_supplicant
indirect pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
virtlockd virtlogd vsftpd@

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

rhgb
quiet

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
-----

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	160G	4.2G	156G	3%	/mnt/ramdisk

```

20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R960
Product Family: PowerEdge

```

```

21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
15x 00AD00B300AD HMC94MEBRA121N 64 GB 2 rank 4800
17x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

```

```

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.4.0
BIOS Date:        03/15/2023
BIOS Revision:    1.4

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

```

511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using Fortran, C, and C++:

```

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1630

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_fp_peak = 1720

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-29 23:31:55-0400.

Report generated on 2023-09-13 18:56:15 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.