



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECrate®2017\_fp\_base = 87.3**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 3


**Test Date:** May-2023

Test Sponsor: HPE

**Hardware Availability:** Feb-2023

Tested by: HPE

**Software Availability:** Dec-2022

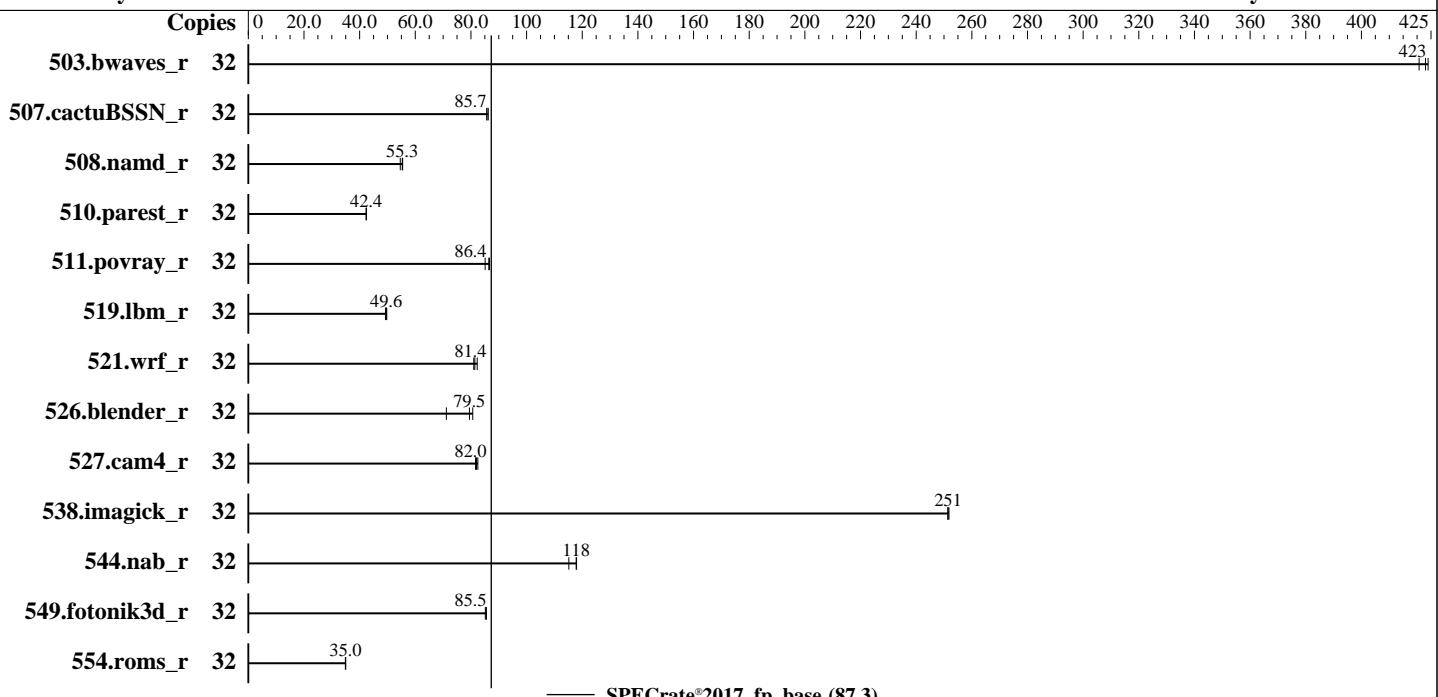

## Hardware

CPU Name: Intel Xeon E5-2620 v4  
Max MHz: 3000  
Nominal: 2100  
Enabled: 16 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip (s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 20 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R, running at 2133)  
Storage: 1 x 900 GB SAS 10K HDD, RAID 0  
Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
Compiler: Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: HPE BIOS Version P89 v3.08 01/12/2023 released Feb-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Results Table

| Benchmark       | Base   |             |             |             |             |             |             | Peak   |         |       |         |       |         |       |
|-----------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|---------|-------|---------|-------|---------|-------|
|                 | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r    | 32     | <b>759</b>  | <b>423</b>  | 757         | 424         | 763         | 421         |        |         |       |         |       |         |       |
| 507.cactubSSN_r | 32     | <b>473</b>  | <b>85.7</b> | 473         | 85.7        | 470         | 86.2        |        |         |       |         |       |         |       |
| 508.namd_r      | 32     | <b>550</b>  | <b>55.3</b> | 557         | 54.6        | 548         | 55.5        |        |         |       |         |       |         |       |
| 510.parest_r    | 32     | <b>1976</b> | <b>42.4</b> | 1971        | 42.5        | 1977        | 42.4        |        |         |       |         |       |         |       |
| 511.povray_r    | 32     | 878         | 85.1        | 862         | 86.7        | <b>865</b>  | <b>86.4</b> |        |         |       |         |       |         |       |
| 519.lbm_r       | 32     | 678         | 49.7        | <b>680</b>  | <b>49.6</b> | 684         | 49.3        |        |         |       |         |       |         |       |
| 521.wrf_r       | 32     | <b>881</b>  | <b>81.4</b> | 872         | 82.2        | 885         | 81.0        |        |         |       |         |       |         |       |
| 526.blender_r   | 32     | <b>613</b>  | <b>79.5</b> | 685         | 71.2        | 604         | 80.6        |        |         |       |         |       |         |       |
| 527.cam4_r      | 32     | 685         | 81.7        | <b>683</b>  | <b>82.0</b> | 679         | 82.5        |        |         |       |         |       |         |       |
| 538.imagick_r   | 32     | <b>316</b>  | <b>251</b>  | 317         | 251         | 316         | 252         |        |         |       |         |       |         |       |
| 544.nab_r       | 32     | <b>457</b>  | <b>118</b>  | 468         | 115         | 457         | 118         |        |         |       |         |       |         |       |
| 549.fotonik3d_r | 32     | 1458        | 85.5        | <b>1458</b> | <b>85.5</b> | 1464        | 85.2        |        |         |       |         |       |         |       |
| 554.roms_r      | 32     | 1458        | 34.9        | 1454        | 35.0        | <b>1454</b> | <b>35.0</b> |        |         |       |         |       |         |       |

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.

For details, please see the config file.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>. This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

This benchmark run is conducted using the latest binaries based on IC23 and to suffice the minimum software requirement, the Operating System used is RHEL9.0

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8480+ CPU + 512GB RAM memory using Red Hat Enterprise Linux 9.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0xb000040 for the Intel Xeon E5-2620 v4 processor.

BIOS Configuration:

Power Profile set to Custom

Power Regulator to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C1E State

Minimum Processor Idle Power Package C-State set to No Package State

QPI Snoop Configuration set to Cluster on Die

Thermal Configuration set to Maximum Cooling

Collaborative Power Control set to Disabled

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Tue May 16 04:42:00 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)  
12. Services, from systemctl list-unit-files  
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

14. cpupower frequency-info

15. sysctl

16. /sys/kernel/mm/transparent\_hugepage

17. /sys/kernel/mm/transparent\_hugepage/khugepaged

18. OS release

19. Disk information

20. /sys/devices/virtual/dmi/id

21. dmidecode

22. BIOS

-----

1. uname -a

Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64 x86\_64 GNU/Linux

-----

2. w

04:42:00 up 11:12, 1 user, load average: 3.06, 19.93, 27.34  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 23:05 5:33m 2.58s 0.03s -bash

-----

3. Username

From environment variable \$USER: root

-----

4. ulimit -a

real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 514921  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 514921  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c  
ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=16 --define physicalfirst --define  
invoke\_with\_interleave --define drop\_caches --tune base -o all fprate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile  
ic2023.0-lin-core-avx2-rate-20221201.cfg --define smt-on --define cores=16 --define physicalfirst --define  
invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode rate

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECrate®2017\_fp\_base = 87.3**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
--tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
vendor_id       : GenuineIntel
cpu family     : 6
model          : 79
stepping        : 1
microcode       : 0xb000040
bugs            : cpu_meltdown spectre_v1 spectre_v2 spec_store_bypass l1tf mds swapgs taa itlb_multihit
cpu cores       : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 16-31
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 48 bits virtual
Byte Order:              Little Endian
CPU(s):                 32
On-line CPU(s) list:    0-31
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:             Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
BIOS Model name:        Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
CPU family:              6
Model:                  79
Thread(s) per core:     2
Core(s) per socket:     8
Socket(s):              2
Stepping:                1
CPU max MHz:            3000.0000
CPU min MHz:            1200.0000
BogoMIPS:                4194.88
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                        cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
                        sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch
                        cpuid_fault epb cat_l3 cdp_l3 invpcid_single pt1 intel_ppin ssbd ibrs ibpb
                        stibp tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
                        bmil hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a rdseed adx smap
                        intel_pt xsaveopt cqmq_llc cqmq_occu_llc cqmq_mbmm_total cqmq_mbmm_local dtherm
                        ida arat pln pts md_clear flush_lld
Virtualization:          VT-x
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECrate®2017\_fp\_base = 87.3**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 3

**Test Date:** May-2023

Test Sponsor: HPE

**Hardware Availability:** Feb-2023

Tested by: HPE

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
L1d cache: 512 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 4 MiB (16 instances)
L3 cache: 40 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Vulnerability Itlb multihit: KVM: Mitigation: VMX disabled
Vulnerability L1tf: Mitigation: PTE Inversion; VMX conditional cache flushes, SMT vulnerable
Vulnerability Mds: Mitigation: Clear CPU buffers; SMT vulnerable
Vulnerability Meltdown: Mitigation: PTI
Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation: Retpolines, IBPB conditional, IBRS_FW, STIBP conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Mitigation: Clear CPU buffers; SMT vulnerable
```

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     32K      512K    8 Data        1       64      1          64
  L1i     32K      512K    8 Instruction  1       64      1          64
  L2      256K      4M      8 Unified     2      512      1          64
  L3      20M      40M    20 Unified    3   16384      1          64
```

-----  
8. numactl --hardware

```
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 64267 MB
node 0 free: 58867 MB
node 1 cpus: 8-15,24-31
node 1 size: 64499 MB
node 1 free: 59597 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

-----  
9. /proc/meminfo
 MemTotal: 131857840 kB

-----  
10. who -r
 run-level 3 May 15 17:29

-----  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
 Default Target Status
 multi-user running

-----  
12. Services, from systemctl list-unit-files
 STATE UNIT FILES
 enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited chronyd crond
 dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
 rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator udisks2
 enabled-runtime systemd-remount-fs

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
disabled      chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update
nftables     rdisc rhsm rhsm-facts rpmbuild serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect      sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
root=UUID=d531e150-0015-45b7-86fe-77ec5632fb82
ro
resume=UUID=fd7d4f1b-2763-4897-8297-b8f9fd0825e6

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.20 GHz and 3.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

18. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 xfs 763G 23G 741G 3% /home

20. /sys/devices/virtual/dmi/id  
Vendor: HP  
Product: ProLiant DL380 Gen9  
Product Family: ProLiant  
Serial: USE63487A0

21. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x HP 809081-081 16 GB 2 rank 2400, configured at 2133

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HP  
BIOS Version: P89  
BIOS Date: 01/12/2023  
BIOS Revision: 3.0  
Firmware Revision: 2.70

## Compiler Version Notes

=====

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

SPECrate®2017\_fp\_base = 87.3

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.1-HSW-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-16 04:41:59-0400.

Report generated on 2023-06-06 19:14:23 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.