



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017\_fp\_base = 248

SPECspeed®2017\_fp\_energy\_base = 1010

SPECspeed®2017\_fp\_peak = 250

SPECspeed®2017\_fp\_energy\_peak = 1020

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

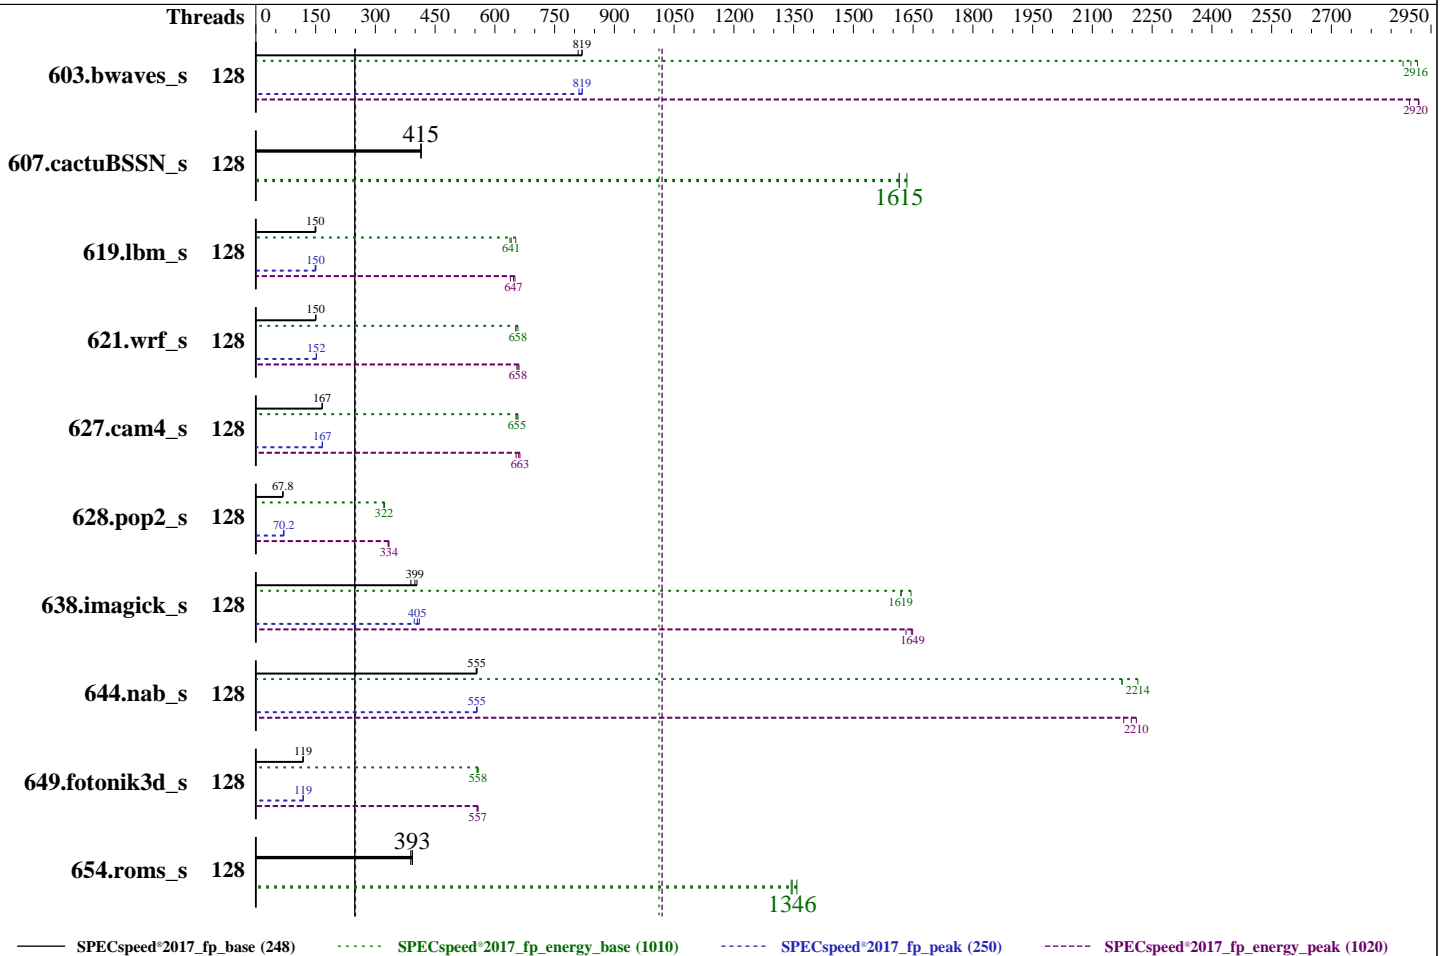

Hardware	Software
CPU Name: AMD EPYC 9754	OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Max MHz: 3100	Kernel 5.14.21-150400.22-default
Nominal: 2250	Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Enabled: 128 cores, 1 chip	Parallel: Yes
Orderable: 1 chip	Firmware: Lenovo BIOS Version KAE111J 2.10 released May-2023
Cache L1: 32 KB I + 32 KB D on chip per core	File System: xfs
L2: 1 MB I+D on chip per core	System State: Run level 3 (multi-user)
L3: 256 MB I+D on chip per chip, 16 MB shared / 8 cores	Base Pointers: 64-bit
Other: None	Peak Pointers: 64-bit
Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)	Other: None
Storage: 1 x 480 GB SATA SSD	Power Management: BIOS and OS set to balance power and performance
Other: None	



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: May-2023  
Hardware Availability: Aug-2023  
Software Availability: Nov-2022

### Power

Max. Power (W): 345.52  
Idle Power (W): 87.28  
Min. Temperature (C): 25.44  
Elevation (m): 43  
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires  
Provisioning: Line-powered

### Power Settings

Management FW: Version 2.10 of KAX317G  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 750 W (non-redundant)  
Details: ThinkSystem 750W Titanium Power Supply 4P57A82019  
Backplane: 8 x 2.5-inch HDD back plane  
Other Storage: None  
Storage Model #: 4XB7A17107  
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb  
NICs Enabled (FW/OS): 4 / 1  
NICs Connected/Speed: 1 @ 1 Gb  
Other HW Model #: 6 x Performance fans

### Power Analyzer

Power Analyzer: WIN:9888  
Hardware Vendor: YOKOGAWA, Inc.  
Model: YokogawaWT310E  
Serial Number: C3UG05014E  
Input Connection: Default  
Metrology Institute: CNAS  
Calibration By: GRG METROLOGY & TEST (BEIJING) CO., LTD.  
Calibration Label: J202210116758A-0005  
Calibration Date: 19-Oct-2022  
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)  
Setup Description: Connected to PSU1  
Current Ranges Used: 2.5A  
Voltage Range Used: 300V

### Temperature Meter

Temperature Meter: WIN:9889  
Hardware Vendor: Digi International, Inc.  
Model: DigiWATCHPORT\_H  
Serial Number: W63074363  
Input Connection: USB  
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)  
Setup Description: 50 mm in front of SUT main intake

## Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	128	72.9	809	22.4	2880	306	314	<b>72.1</b>	<b>819</b>	<b>22.1</b>	<b>2920</b>	<b>306</b>	<b>315</b>	72.0	819	22.2	2900	308	315
607.cactuBSSN_s	128	<b>40.2</b>	<b>415</b>	<b>11.3</b>	<b>1620</b>	<b>281</b>	<b>301</b>	40.2	415	11.2	1630	278	301	40.2	414	11.3	1620	281	301
619.lbm_s	128	35.2	149	9.33	638	265	287	34.8	151	9.12	652	262	287	<b>35.0</b>	<b>150</b>	<b>9.28</b>	<b>641</b>	<b>265</b>	<b>288</b>
621.wrf_s	128	88.0	150	22.1	653	251	254	<b>88.0</b>	<b>150</b>	<b>21.9</b>	<b>658</b>	<b>249</b>	<b>253</b>	87.9	150	22.1	653	252	255
627.cam4_s	128	53.1	167	14.7	658	276	300	53.2	166	14.8	653	277	303	<b>53.2</b>	<b>167</b>	<b>14.7</b>	<b>655</b>	<b>277</b>	<b>303</b>
628.pop2_s	128	175	68.0	40.4	323	231	235	176	67.6	40.6	321	231	235	<b>175</b>	<b>67.8</b>	<b>40.5</b>	<b>322</b>	<b>231</b>	<b>235</b>
638.imagick_s	128	<b>36.1</b>	<b>399</b>	<b>9.71</b>	<b>1620</b>	<b>269</b>	<b>345</b>	35.7	405	9.56	1640	268	345	37.1	389	9.71	1620	262	345
644.nab_s	128	31.6	553	8.74	2170	277	307	<b>31.5</b>	<b>555</b>	<b>8.59</b>	<b>2210</b>	<b>273</b>	<b>305</b>	31.5	555	8.74	2180	278	304
649.fotonik3d_s	128	77.2	118	18.4	555	239	278	76.6	119	18.4	558	240	279	<b>76.7</b>	<b>119</b>	<b>18.4</b>	<b>558</b>	<b>239</b>	<b>280</b>
654.roms_s	128	40.1	393	13.0	1360	323	339	<b>40.1</b>	<b>393</b>	<b>13.1</b>	<b>1350</b>	<b>326</b>	<b>338</b>	40.5	389	13.1	1340	323	339

SPECspeed®2017\_fp\_base = 248

SPECspeed®2017\_fp\_energy\_base = 1010

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017\_fp\_base = 248

SPECspeed®2017\_fp\_energy\_base = 1010

SPECspeed®2017\_fp\_peak = 250

SPECspeed®2017\_fp\_energy\_peak = 1020

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

### Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	128	<b>72.0</b>	<b>819</b>	<b>22.0</b>	<b>2920</b>	<b>306</b>	<b>315</b>	72.0	820	22.1	2920	306	314	72.7	811	22.2	2900	306	313
607.cactuBSSN_s	128	<b>40.2</b>	<b>415</b>	<b>11.3</b>	<b>1620</b>	<b>281</b>	<b>301</b>	40.2	415	11.2	1630	278	301	40.2	414	11.3	1620	281	301
619.lbm_s	128	34.8	150	9.15	651	263	286	<b>34.9</b>	<b>150</b>	<b>9.20</b>	<b>647</b>	<b>264</b>	<b>287</b>	35.2	149	9.31	639	265	288
621.wrf_s	128	87.1	152	22.0	655	253	256	87.0	152	21.9	661	251	255	<b>87.1</b>	<b>152</b>	<b>21.9</b>	<b>658</b>	<b>252</b>	<b>256</b>
627.cam4_s	128	53.1	167	14.8	653	278	302	<b>53.1</b>	<b>167</b>	<b>14.5</b>	<b>663</b>	<b>274</b>	<b>304</b>	53.1	167	14.6	660	276	301
628.pop2_s	128	169	70.3	39.1	333	232	235	170	69.7	39.3	332	231	234	<b>169</b>	<b>70.2</b>	<b>39.1</b>	<b>334</b>	<b>231</b>	<b>234</b>
638.imagick_s	128	36.3	398	9.63	1630	266	345	<b>35.6</b>	<b>405</b>	<b>9.54</b>	<b>1650</b>	<b>268</b>	<b>344</b>	35.2	410	9.56	1650	272	346
644.nab_s	128	31.5	555	8.73	2180	277	304	<b>31.5</b>	<b>555</b>	<b>8.60</b>	<b>2210</b>	<b>273</b>	<b>303</b>	31.5	555	8.65	2200	275	303
649.fotonik3d_s	128	76.6	119	18.4	558	240	280	<b>76.6</b>	<b>119</b>	<b>18.4</b>	<b>557</b>	<b>240</b>	<b>279</b>	76.8	119	18.4	555	240	279
654.roms_s	128	40.1	393	13.0	1360	323	339	<b>40.1</b>	<b>393</b>	<b>13.1</b>	<b>1350</b>	<b>326</b>	<b>338</b>	40.5	389	13.1	1340	323	339

SPECspeed®2017\_fp\_peak = 250

SPECspeed®2017\_fp\_energy\_peak = 1020

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To disable THP for peak runs of 621.wrf\_s:

'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

## Operating System Notes (Continued)

run as root.  
To enable THP only on request for peak runs of 654.roms\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-127"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-amd-aocc400\_znver4\_A1/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "128"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 638.imagick\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 644.nab\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-127"  
PGHPPF\_ZMEM = "yes"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base =	248
SPECSpeed®2017_fp_energy_base =	1010
SPECSpeed®2017_fp_peak =	250
SPECSpeed®2017_fp_energy_peak =	1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

### Platform Notes

BIOS configuration:

Operating Mode set to Custom Mode  
Core Performance Boost set to Disabled  
Determinism Slider set to Power  
SMT Mode set to Disabled  
DF P-States set to P1

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400\_znver4\_A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun May 21 10:00:14 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
10:00:14 up 1 min, 1 user, load average: 0.89, 0.56, 0.22  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:59 20.00s 2.18s 0.16s /bin/bash ./amd\_speed\_aocc400\_znver4\_A1.sh  
-----

3. Username  
From environment variable \$USER: root  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base =	248
SPECspeed®2017_fp_energy_base =	1010
SPECspeed®2017_fp_peak =	250
SPECspeed®2017_fp_energy_peak =	1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 1544995
max locked memory      (kbytes, -l) 2097152
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 1544995
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./run_SR655V3_bergamo.sh
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --power --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --power --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --runmode
speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.033/templogs/preenv.fpspeed.033.0.log --lognum 033.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400_znver4_A1
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00208
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 128
siblings       : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base =	248
SPECSpeed®2017_fp_energy_base =	1010
SPECSpeed®2017_fp_peak =	250
SPECSpeed®2017_fp_energy_peak =	1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9754 128-Core Processor
CPU family:            25
Model:                160
Thread(s) per core:    1
Core(s) per socket:    128
Socket(s):             1
Stepping:              2
Frequency boost:        disabled
CPU max MHz:           3100.3411
CPU min MHz:           1500.0000
BogoMIPS:              4493.30
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsave_xsavec cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             4 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              128 MiB (128 instances)
L3 cache:              256 MiB (16 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                        filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	16M	256M	16	Unified	3	16384	1	64

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-127
node 0 size: 386272 MB
node 0 free: 384589 MB
node distances:
node 0
0: 10

```

```

9. /proc/meminfo
MemTotal: 395543340 kB

```

```

10. who -r
run-level 3 May 21 09:59

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd wickd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init
iscsid iscsiui issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs
nfs-blkmap nmb rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb
snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd tuned
generated ntp_sync
indirect wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=4fcd643d-e392-48aa-b6f6-80f024d1c633
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR655 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base =	248
SPECSpeed®2017_fp_energy_base =	1010
SPECSpeed®2017_fp_peak =	250
SPECSpeed®2017_fp_energy_peak =	1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: no
    Active: no
```

```
-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

### 20. Disk information

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400\_znver4\_A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 xfs 446G 52G 395G 12% /

### 21. /sys/devices/virtual/dmi/id

Vendor: Lenovo  
Product: ThinkSystem SR655V3  
Product Family: ThinkSystem  
Serial: 1234567890

### 22. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

5x SK Hynix HMC88AEBRA115N 32 GB 2 rank 4800  
7x SK Hynix HMC88AEBRA168N 32 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: KAE111J-2.10  
BIOS Date: 05/11/2023  
BIOS Revision: 2.10  
Firmware Revision: 2.10

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

## Base Portability Flags (Continued)

```
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2023

**Hardware Availability:** Aug-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick\_s: Same as 619.lbm\_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR655 V3**  
**(2.25 GHz, AMD EPYC 9754)**

SPECspeed®2017\_fp\_base = 248  
SPECspeed®2017\_fp\_energy\_base = 1010  
SPECspeed®2017\_fp\_peak = 250  
SPECspeed®2017\_fp\_energy\_peak = 1020

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2023  
**Hardware Availability:** Aug-2023  
**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-20 22:00:13-0400.  
Report generated on 2023-06-29 19:01:46 by CPU2017 PDF formatter v6716.  
Originally published on 2023-06-29.