



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL380 Gen10 Plus
(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

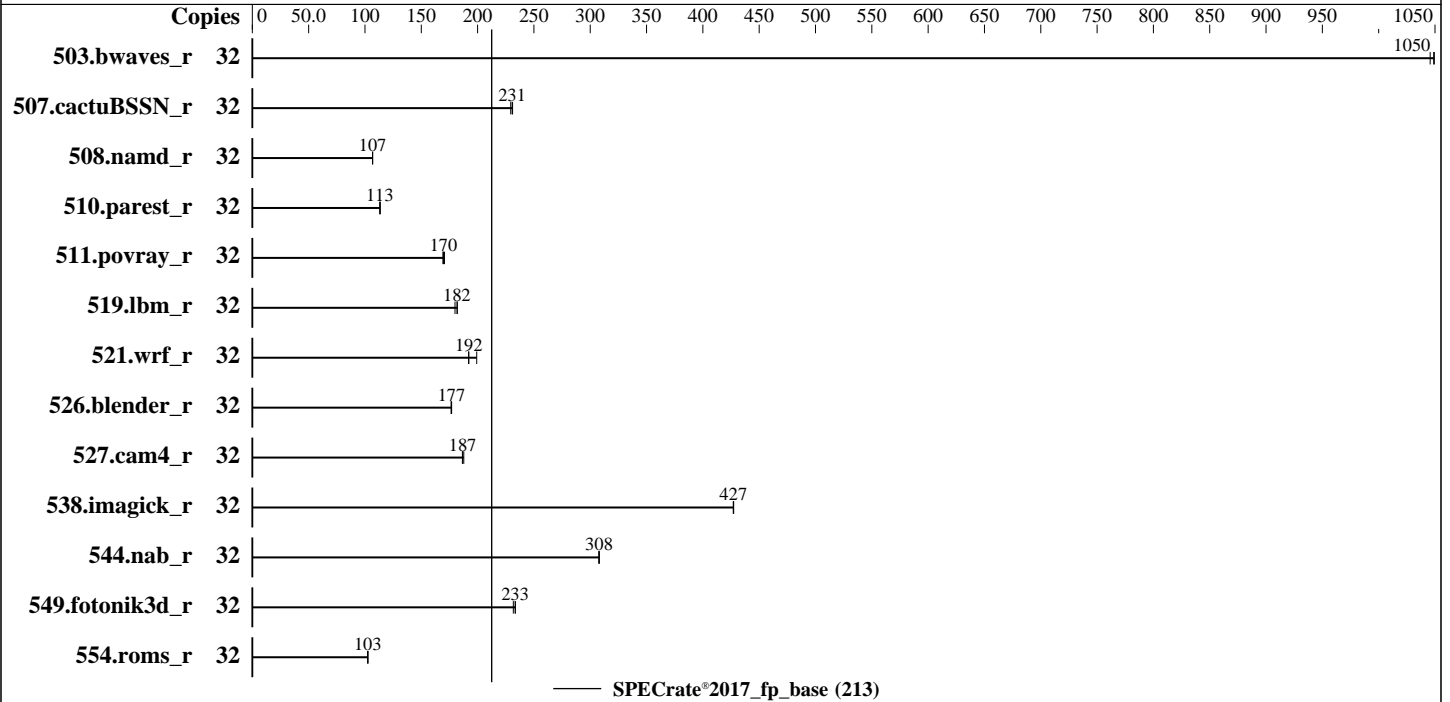

Hardware

CPU Name: Intel Xeon Gold 6334
Max MHz: 3700
Nominal: 3600
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 18 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 800 GB SAS SSD, RAID 0
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.76 04/20/2023 released May-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus

(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<u>306</u>	<u>1050</u>	306	1050	307	1050							
507.cactuBSSN_r	32	<u>176</u>	<u>231</u>	175	231	177	229							
508.namd_r	32	285	107	285	107	<u>285</u>	<u>107</u>							
510.parest_r	32	<u>739</u>	<u>113</u>	737	114	739	113							
511.povray_r	32	438	171	442	169	<u>440</u>	<u>170</u>							
519.lbm_r	32	<u>186</u>	<u>182</u>	187	180	185	182							
521.wrf_r	32	360	199	<u>373</u>	<u>192</u>	373	192							
526.blender_r	32	276	176	<u>276</u>	<u>177</u>	275	177							
527.cam4_r	32	300	186	<u>300</u>	<u>187</u>	298	188							
538.imagick_r	32	<u>186</u>	<u>427</u>	186	427	186	427							
544.nab_r	32	175	308	<u>175</u>	<u>308</u>	175	308							
549.fotonik3d_r	32	538	232	534	233	<u>534</u>	<u>233</u>							
554.roms_r	32	496	103	<u>496</u>	<u>103</u>	496	102							

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus
(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0xd000390 for the Intel Xeon Gold 6334 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute
Memory Patrol Scrubbing is set to Disabled
Advanced Memory Protection set to Advanced ECC
Last Level Cache (LLC) Prefetch set to Enabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Enhanced Processor Performance set to Enabled
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
DCU Stream Prefetcher set to Disabled
XPT Remote Prefetcher set to Enabled
Energy/Performance Bias set to Balanced Performance

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu May 18 17:15:43 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus

(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
17:15:43 up 2 min, 2 users, load average: 0.01, 0.02, 0.00
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1     17:14   1:27   0.00s  0.00s  -bash
root      pts/0    17:14   6.00s  1.02s  0.00s  -bash
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 2062508
max locked memory           (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 2062508
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
vendor_id      : GenuineIntel
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus
(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
cpu family      : 6
model           : 106
stepping        : 6
microcode       : 0xd000390
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 64-79
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
BIOS Model name:      Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
CPU family:            6
Model:                 106
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             2
Stepping:              6
CPU max MHz:          3700.0000
CPU min MHz:          800.0000
BogoMIPS:              7200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx
                      est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe
                      popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                      3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb
                      stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                      cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln
                      pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                      avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
                      pconfig flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             768 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              20 MiB (16 instances)
L3 cache:              36 MiB (2 instances)
NUMA node(s):         4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus

(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node0 CPU(s):      0-3,16-19
NUMA node1 CPU(s):      4-7,20-23
NUMA node2 CPU(s):      8-11,24-27
NUMA node3 CPU(s):      12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1.3M	20M	20	Unified	2	1024	1	64
L3	18M	36M	12	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 128648 MB
node 0 free: 128309 MB
node 1 cpus: 4-7,20-23
node 1 size: 129022 MB
node 1 free: 128617 MB
node 2 cpus: 8-11,24-27
node 2 size: 128985 MB
node 2 free: 128638 MB
node 3 cpus: 12-15,28-31
node 3 size: 129011 MB
node 3 free: 128660 MB
node distances:
node  0  1  2  3
0:  10  20  30  30
1:  20  10  30  30
2:  30  30  10  20
3:  30  30  20  10

```

9. /proc/meminfo

MemTotal: 528043296 kB

10. who -r

run-level 3 May 18 17:13

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus
(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

enabled      NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
             dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
             nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
             systemd-network-generator tuned udisks2

enabled-runtime  systemd-remount-fs
disabled        blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat
serial-getty@  sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 3.70 GHz and 3.70 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus
(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 670G 30G 641G 5% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL380 Gen10 Plus
Product Family: ProLiant
Serial: CN70110BZJ
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: U46
BIOS Date: 04/20/2023
BIOS Revision: 1.76
Firmware Revision: 2.40
-----
```

Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus

(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus

(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10 Plus
(3.6 GHz, Intel Xeon Gold 6334)

SPECrate®2017_fp_base = 213

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-ICX-revJ.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-ICX-revJ.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-18 07:45:43-0400.
Report generated on 2023-06-20 23:24:48 by CPU2017 PDF formatter v6716.
Originally published on 2023-06-20.