



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

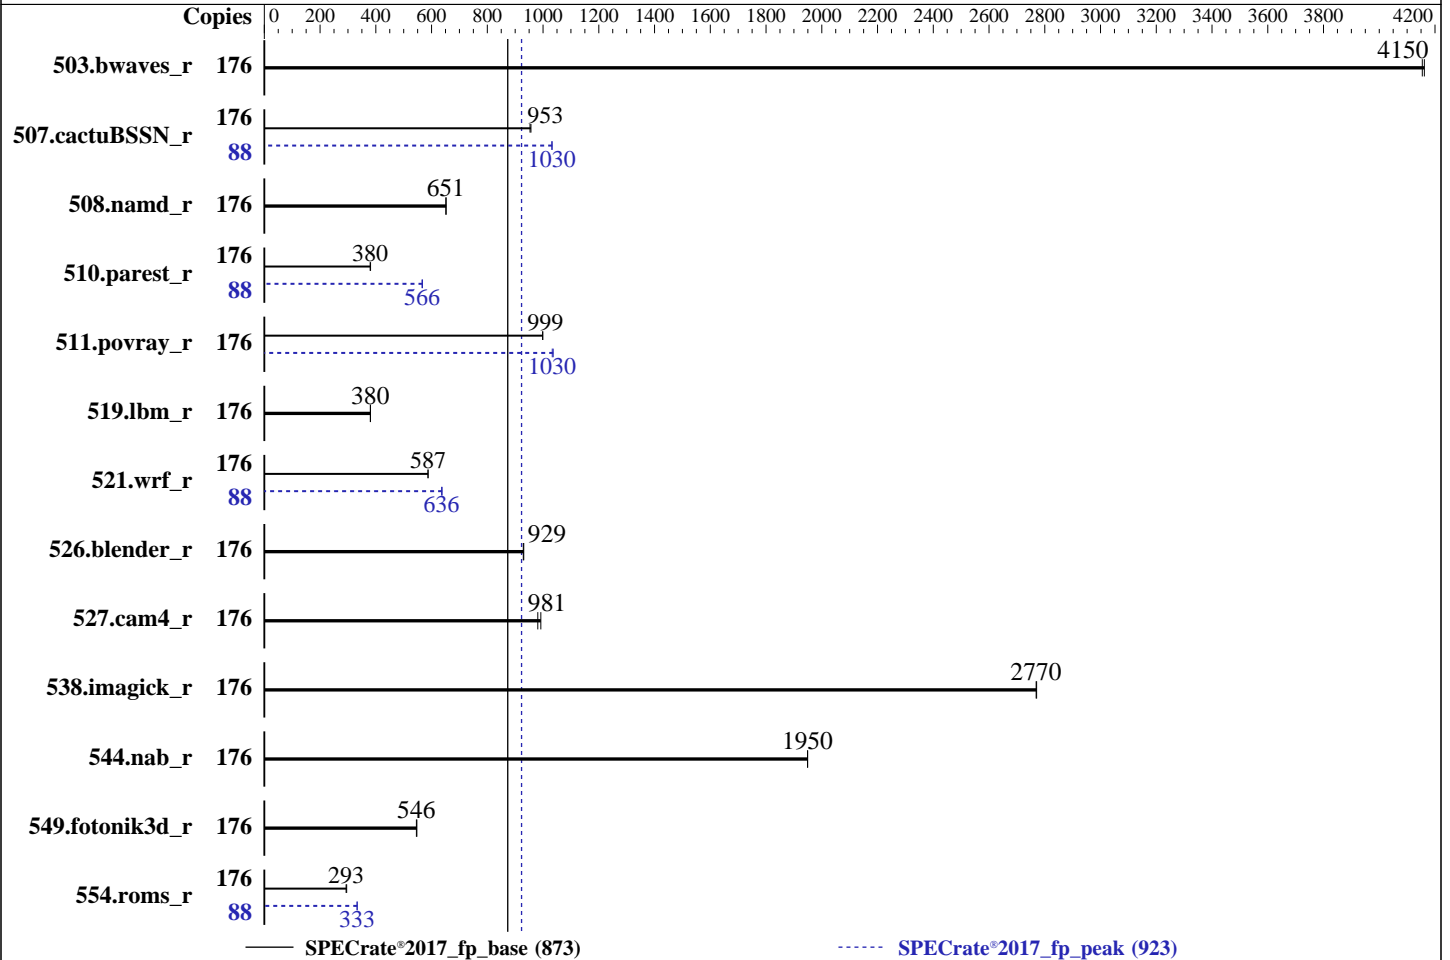

Hardware

CPU Name: Intel Xeon Platinum 8458P
 Max MHz: 3800
 Nominal: 2700
 Enabled: 88 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 100 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 1.3.2 released Mar-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	176	425	4150	424	4160			176	425	4150	424	4160		
507.cactuBSSN_r	176	233	957	234	953			88	108	1030	108	1030		
508.namd_r	176	257	651	256	652			176	257	651	256	652		
510.parest_r	176	1208	381	1213	380			88	407	566	406	567		
511.povray_r	176	411	999	412	999			176	398	1030	397	1040		
519.lbm_r	176	488	380	487	381			176	488	380	487	381		
521.wrf_r	176	671	587	671	587			88	310	636	309	638		
526.blender_r	176	288	931	289	929			176	288	931	289	929		
527.cam4_r	176	314	981	310	992			176	314	981	310	992		
538.imagick_r	176	158	2770	158	2770			176	158	2770	158	2770		
544.nab_r	176	152	1950	152	1950			176	152	1950	152	1950		
549.fotonik3d_r	176	1253	547	1257	546			176	1253	547	1257	546		
554.roms_r	176	953	293	947	295			88	420	333	419	333		

SPECrate®2017_fp_base = **873**

SPECrate®2017_fp_peak = **923**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 100 GB ramdisk created with the cmd: "mount -t tmpfs -o size=100G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
    DCU Streamer Prefetcher : Disabled
    Sub NUMA Cluster : 4-way Clustering
    LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
    Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    C1E : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
    Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 24 17:35:42 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
17:35:42 up 4:05, 1 user, load average: 118.51, 162.16, 170.12
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 13:30 4:03m 1.31s 0.00s /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define
DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124453
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124453
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=176 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4
--output_format csv,html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=176 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define
DL-BIOS-SNC=4 --output_format csv,html,pdf,txt --nopower --runmode rate --tune base:peak --size refrate
fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum
002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8458P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 44
siblings       : 88
2 physical ids (chips)
176 processors (hardware threads)
physical id 0: core ids 0-43
physical id 1: core ids 0-43
physical id 0: apicids 0-87
physical id 1: apicids 128-215
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 176
On-line CPU(s) list: 0-175
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8458P
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 44
Socket(s): 2
Stepping: 8
BogoMIPS: 5400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Lld cache:	4.1 MiB (88 instances)
Lli cache:	2.8 MiB (88 instances)
L2 cache:	176 MiB (88 instances)
L3 cache:	165 MiB (2 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 88, 92, 96, 100, 104, 108, 112, 116, 120, 124, 128
NUMA node1 CPU(s):	44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 132, 136, 140, 144, 148, 152, 156, 160, 164, 168, 172
NUMA node2 CPU(s):	2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 90, 94, 98, 102, 106, 110, 114, 118, 122, 126, 130
NUMA node3 CPU(s):	46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 134, 138, 142, 146, 150, 154, 158, 162, 166, 170, 174
NUMA node4 CPU(s):	1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 89, 93, 97, 101, 105, 109, 113, 117, 121, 125, 129
NUMA node5 CPU(s):	45, 49, 53, 57, 61, 65, 69, 73, 77, 81, 85, 133, 137, 141, 145, 149, 153, 157, 161, 165, 169, 173
NUMA node6 CPU(s):	3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 91, 95, 99, 103, 107, 111, 115, 119, 123, 127, 131
NUMA node7 CPU(s):	47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87, 135, 139, 143, 147, 151, 155, 159, 163, 167, 171, 175
Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	4.1M	12	Data	1	64	1	64
Lli	32K	2.8M	8	Instruction	1	64	1	64
L2	2M	176M	16	Unified	2	2048	1	64
L3	82.5M	165M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 88, 92, 96, 100, 104, 108, 112, 116, 120, 124, 128
node 0 size: 128399 MB
node 0 free: 127206 MB
node 1 cpus: 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 132, 136, 140, 144, 148, 152, 156, 160, 164, 168, 172
node 1 size: 128983 MB
node 1 free: 128219 MB
node 2 cpus: 2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 90, 94, 98, 102, 106, 110, 114, 118, 122, 126, 130
node 2 size: 129018 MB
node 2 free: 128285 MB
node 3 cpus: 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 134, 138, 142, 146, 150, 154, 158, 162, 166, 170, 174
node 3 size: 129018 MB
node 3 free: 128275 MB
node 4 cpus: 1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 89, 93, 97, 101, 105, 109, 113, 117, 121, 125, 129
node 4 size: 129018 MB
node 4 free: 119604 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 5 cpus: 45,49,53,57,61,65,69,73,77,81,85,133,137,141,145,149,153,157,161,165,169,173
node 5 size: 129018 MB
node 5 free: 128227 MB
node 6 cpus: 3,7,11,15,19,23,27,31,35,39,43,91,95,99,103,107,111,115,119,123,127,131
node 6 size: 129018 MB
node 6 free: 127191 MB
node 7 cpus: 47,51,55,59,63,67,71,75,79,83,87,135,139,143,147,151,155,159,163,167,171,175
node 7 size: 128662 MB
node 7 free: 127859 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 12 12 21 21 21 21
1: 12 10 12 12 21 21 21 21
2: 12 12 10 12 21 21 21 21
3: 12 12 12 10 21 21 21 21
4: 21 21 21 21 10 12 12 12
5: 21 21 21 21 12 10 12 12
6: 21 21 21 21 12 12 10 12
7: 21 21 21 21 12 12 12 10

```

```

9. /proc/meminfo
MemTotal: 1055884452 kB

```

```

10. who -r
run-level 3 Apr 24 13:30

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd
nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind rpmconfigcheck
rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=16362246-1892-42a0-9119-ef57f22891af
linux
splash=silent
resume=/dev/disk/by-uuid/c0830e3c-adf5-4663-81bb-2d24c777d423
mitigations=auto
quiet
security=apparmor
crashkernel=309M,high

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

crashkernel=72M,low

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 100G 4.2G 96G 5% /mnt/ramdisk

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge C6620
Product Family: PowerEdge

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.3.2
BIOS Date: 03/28/2023
BIOS Revision: 1.3

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 873

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_peak = 923

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-24 17:35:41-0400.

Report generated on 2023-07-19 16:27:08 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.