



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

**SPECspeed®2017\_int\_base = 10.9**

**SPECspeed®2017\_int\_peak = 11.1**

CPU2017 License: 3


**Test Date:** Jun-2023

**Test Sponsor:** HPE

**Hardware Availability:** Sep-2023

**Tested by:** HPE

**Software Availability:** Apr-2023

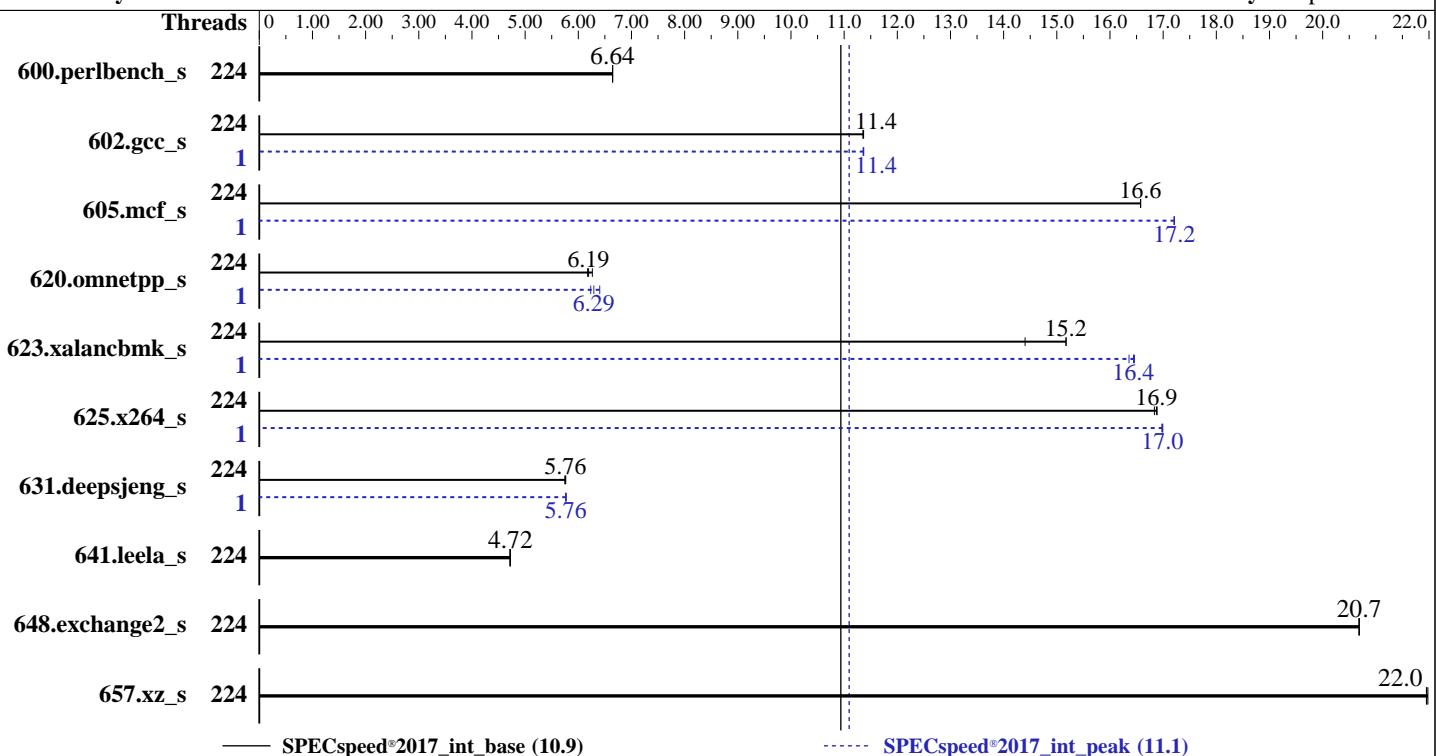

## Hardware

CPU Name: AMD EPYC 9734  
Max MHz: 3000  
Nominal: 2200  
Enabled: 224 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
16 MB shared / 7 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
Compiler: Kernel 5.14.0-70.13.1.el9\_x86\_64  
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC  
Firmware: HPE BIOS Version v1.30 03/06/2023 released Mar-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

**SPECspeed®2017\_int\_base = 10.9**

**SPECspeed®2017\_int\_peak = 11.1**

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	224	267	6.64	<b>267</b>	<b>6.64</b>	267	6.65	224	267	6.64	<b>267</b>	<b>6.64</b>	267	6.65		
602.gcc_s	224	<b>350</b>	<b>11.4</b>	350	11.4	351	11.4	1	350	11.4	<b>350</b>	<b>11.4</b>	351	11.4		
605.mcf_s	224	<b>285</b>	<b>16.6</b>	285	16.6	285	16.6	1	<b>274</b>	<b>17.2</b>	274	17.2	274	17.2		
620.omnetpp_s	224	264	6.18	<b>263</b>	<b>6.19</b>	260	6.26	1	<b>259</b>	<b>6.29</b>	255	6.40	262	6.23		
623.xalancbmk_s	224	98.4	14.4	<b>93.4</b>	<b>15.2</b>	93.4	15.2	1	86.1	16.5	86.6	16.4	<b>86.2</b>	<b>16.4</b>		
625.x264_s	224	<b>105</b>	<b>16.9</b>	105	16.8	104	16.9	1	104	17.0	104	17.0	<b>104</b>	<b>17.0</b>		
631.deepsjeng_s	224	249	5.75	<b>249</b>	<b>5.76</b>	249	5.76	1	<b>249</b>	<b>5.76</b>	249	5.76	248	5.77		
641.leela_s	224	361	4.72	362	4.71	<b>361</b>	<b>4.72</b>	224	361	4.72	362	4.71	<b>361</b>	<b>4.72</b>		
648.exchange2_s	224	142	20.7	<b>142</b>	<b>20.7</b>	142	20.7	224	142	20.7	<b>142</b>	<b>20.7</b>	142	20.7		
657.xz_s	224	<b>282</b>	<b>22.0</b>	282	22.0	281	22.0	224	<b>282</b>	<b>22.0</b>	282	22.0	281	22.0		
<b>SPECspeed®2017_int_base = 10.9</b>																
<b>SPECspeed®2017_int_peak = 11.1</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-223"  
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "224"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

```
Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
AMD SMT Option set to Disabled  
NUMA memory domains per socket set to Four memory domains per socket  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
ACPI CST C2 Latency set to 18 microseconds  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode
```

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Jun 29 21:47:20 2023
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)  
12. Failed units, from systemctl list-units --state=failed  
13. Services, from systemctl list-unit-files  
14. Linux kernel boot-time arguments, from /proc/cmdline  
15. cpupower frequency-info  
16. tuned-adm active  
17. sysctl  
18. /sys/kernel/mm/transparent\_hugepage  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
20. OS release  
21. Disk information  
22. /sys/devices/virtual/dmi/id  
23. dmidecode  
24. BIOS  
-----

1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux

2. w  
21:47:20 up 1:16, 2 users, load average: 0.27, 0.06, 0.02  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 25May22 400days 0.00s 0.00s -bash  
root pts/0 25May22 24.00s 1.26s 0.12s /bin/bash ./amd\_speed\_aocc400\_znver4\_A1.sh

3. Username  
From environment variable \$USER: root

4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 6191102  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Platform Notes (Continued)

```
POSIX message queues          (bytes, -q) 819200
real-time priority            (-r) 0
stack size                    (kbytes, -s) unlimited
cpu time                      (seconds, -t) unlimited
max user processes             (-u) 6191102
virtual memory                 (kbytes, -v) unlimited
file locks                     (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 28  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
python3 ./run_intspeed_znver4_A1.py  
/bin/bash ./amd_speed_aocc400_znver4_A1.sh  
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed  
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.012/templogs/preenv.intspeed.012.0.log --lognum 012.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9734 112-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 25  
model          : 160  
stepping        : 2  
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size        : 3584 4K pages  
cpu cores      : 112  
siblings        : 112  
2 physical ids (chips)  
224 processors (hardware threads)  
physical id 0: core ids  
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,  
240-246  
physical id 1: core ids  
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,  
240-246  
physical id 0: apicids  
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,  
240-246  
physical id 1: apicids  
256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438,448-454,4  
64-470,480-486,496-502
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

**SPECspeed®2017\_int\_base = 10.9**

**SPECspeed®2017\_int\_peak = 11.1**

CPU2017 License: 3

**Test Date:** Jun-2023

Test Sponsor: HPE

**Hardware Availability:** Sep-2023

Tested by: HPE

**Software Availability:** Apr-2023

## Platform Notes (Continued)

```

CPU(s):
On-line CPU(s) list: 224
Vendor ID: 0-223
AuthenticAMD
BIOS Vendor ID: Advanced Micro Devices, Inc.
Model name: AMD EPYC 9734 112-Core Processor
BIOS Model name: AMD EPYC 9734 112-Core Processor
CPU family: 25
Model: 160
Thread(s) per core: 1
Core(s) per socket: 112
Socket(s): 2
Stepping: 2
Frequency boost: enabled
CPU max MHz: 2200.0000
CPU min MHz: 1500.0000
BogoMIPS: 4393.34
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil
avx2 smep bmi2 erms invpcid cqmm rdta avx512f avx512dq rdseed adx smap
avx512fma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavenc xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopsntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V
Virtualization: 7 MiB (224 instances)
L1d cache: 7 MiB (224 instances)
L1i cache: 224 MiB (224 instances)
L2 cache: 512 MiB (32 instances)
L3 cache: 32
NUMA node(s): 0-6
NUMA node0 CPU(s): 7-13
NUMA node1 CPU(s): 56-62
NUMA node2 CPU(s): 63-69
NUMA node3 CPU(s): 28-34
NUMA node4 CPU(s): 35-41
NUMA node5 CPU(s): 84-90
NUMA node6 CPU(s): 91-97
NUMA node7 CPU(s): 42-48
NUMA node8 CPU(s): 49-55
NUMA node9 CPU(s): 98-104
NUMA node10 CPU(s): 105-111
NUMA node11 CPU(s): 14-20
NUMA node12 CPU(s): 21-27
NUMA node13 CPU(s): 70-76
NUMA node14 CPU(s): 77-83
NUMA node15 CPU(s): 112-118
NUMA node16 CPU(s): 119-125
NUMA node17 CPU(s): 168-174
NUMA node18 CPU(s): 175-181
NUMA node19 CPU(s): 140-146
NUMA node20 CPU(s): 147-153

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

## Platform Notes (Continued)

NUMA node22 CPU(s):	196-202
NUMA node23 CPU(s):	203-209
NUMA node24 CPU(s):	154-160
NUMA node25 CPU(s):	161-167
NUMA node26 CPU(s):	210-216
NUMA node27 CPU(s):	217-223
NUMA node28 CPU(s):	126-132
NUMA node29 CPU(s):	133-139
NUMA node30 CPU(s):	182-188
NUMA node31 CPU(s):	189-195
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	7M	8	Data	1	64	1	64
L1i	32K	7M	8	Instruction	1	64	1	64
L2	1M	224M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

node 0 cpus: 0-6

node 0 size: 48136 MB

node 0 free: 47980 MB

node 1 cpus: 7-13

node 1 size: 48382 MB

node 1 free: 48223 MB

node 2 cpus: 56-62

node 2 size: 48382 MB

node 2 free: 48233 MB

node 3 cpus: 63-69

node 3 size: 48382 MB

node 3 free: 48279 MB

node 4 cpus: 28-34

node 4 size: 48382 MB

node 4 free: 48233 MB

node 5 cpus: 35-41

node 5 size: 48382 MB

node 5 free: 48126 MB

node 6 cpus: 84-90

node 6 size: 48382 MB

node 6 free: 48237 MB

node 7 cpus: 91-97

node 7 size: 48382 MB

node 7 free: 48242 MB

node 8 cpus: 42-48

node 8 size: 48382 MB

node 8 free: 48241 MB

node 9 cpus: 49-55

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Platform Notes (Continued)

```
node 9 size: 48382 MB
node 9 free: 48247 MB
node 10 cpus: 98-104
node 10 size: 48382 MB
node 10 free: 48252 MB
node 11 cpus: 105-111
node 11 size: 48382 MB
node 11 free: 48168 MB
node 12 cpus: 14-20
node 12 size: 48382 MB
node 12 free: 48259 MB
node 13 cpus: 21-27
node 13 size: 48382 MB
node 13 free: 48264 MB
node 14 cpus: 70-76
node 14 size: 48382 MB
node 14 free: 48267 MB
node 15 cpus: 77-83
node 15 size: 48382 MB
node 15 free: 48260 MB
node 16 cpus: 112-118
node 16 size: 48382 MB
node 16 free: 47894 MB
node 17 cpus: 119-125
node 17 size: 48382 MB
node 17 free: 48140 MB
node 18 cpus: 168-174
node 18 size: 48382 MB
node 18 free: 48063 MB
node 19 cpus: 175-181
node 19 size: 48382 MB
node 19 free: 48185 MB
node 20 cpus: 140-146
node 20 size: 48382 MB
node 20 free: 48255 MB
node 21 cpus: 147-153
node 21 size: 48382 MB
node 21 free: 48261 MB
node 22 cpus: 196-202
node 22 size: 48382 MB
node 22 free: 48256 MB
node 23 cpus: 203-209
node 23 size: 48382 MB
node 23 free: 48276 MB
node 24 cpus: 154-160
node 24 size: 48382 MB
node 24 free: 48257 MB
node 25 cpus: 161-167
node 25 size: 48382 MB
node 25 free: 48247 MB
node 26 cpus: 210-216
node 26 size: 48382 MB
node 26 free: 48242 MB
node 27 cpus: 217-223
node 27 size: 48382 MB
node 27 free: 48253 MB
node 28 cpus: 126-132
node 28 size: 48345 MB
node 28 free: 48204 MB
node 29 cpus: 133-139
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

**SPECspeed®2017\_int\_base = 10.9**

**SPECspeed®2017\_int\_peak = 11.1**

CPU2017 License: 3

**Test Date:** Jun-2023

Test Sponsor: HPE

**Hardware Availability:** Sep-2023

Tested by: HPE

**Software Availability:** Apr-2023

## Platform Notes (Continued)

```
node 29 size: 48382 MB
node 29 free: 48262 MB
node 30 cpus: 182-188
node 30 size: 48382 MB
node 30 free: 48256 MB
node 31 cpus: 189-195
node 31 size: 48309 MB
node 31 free: 48159 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25 26 27 28 29 30 31
 0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 8: 12 12 12 12 12 12 12 12 10 11 11 11 11 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 9: 12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 12 11 11 11 10 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
12: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12 10 11 11 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
13: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
14: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 10 10 11 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
15: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 12 12 12 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 12 12 12 12 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 12 12 12 12 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12 12 12 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11 11 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11 10 11 11 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11 11 10 11 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 11 11 10 11 12
 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12
24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 12 10
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

HiSilicon DES35 Gen1  
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017 int base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

**Test Date:** Jun-2023

**Test Sponsor:** HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

## **Platform Notes (Continued)**

9. /proc/meminfo  
MemTotal: 1585029256 kB

10. who -r  
run-level 3 May 25 16:56

```
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target      Status
    multi-user          degraded
```

```
12. Failed units, from systemctl list-units --state=failed
   UNIT                  LOAD  ACTIVE SUB      DESCRIPTION
 * dnf-makecache.service loaded failed failed dnf makecache
```

```
13. Services, from systemctl list-unit-files
   STATE           UNIT FILES
  enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                  dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                  nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                  systemd-network-generator tuned udisks2
  enabled-runtime  systemd-remount-fs
disabled       blk-availability chrony-wait console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat
                  man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild
                  serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
                  target targetcli
indirect       sssd-automount sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
14. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd2,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
    root=/dev/mapper/rhel-root
    ro
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap
```

## 15. cpupower frequency-info analyzing CPU 0:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Platform Notes (Continued)

```
current policy: frequency should be within 1.50 GHz and 2.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.
```

```
boost state support:
```

```
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2200MHz
```

---

```
16. tuned-adm active
```

```
Current active profile: throughput-performance
```

---

```
17. sysctl
```

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

---

```
18. /sys/kernel/mm/transparent_hugepage
```

```
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage_pmd_size 2097152  
shmem_enabled always within_size advise [never] deny force
```

---

```
19. /sys/kernel/mm/transparent_hugepage/khugepaged
```

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

---

```
20. OS release
```

```
From /etc/*-release /etc/*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Platform Notes (Continued)

-----  
21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	18G	354G	5%	/home

-----  
22. /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL385 Gen11
Product Family:	ProLiant
Serial:	DL385G11-006

-----  
23. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

-----  
24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	HPE
BIOS Version:	1.30
BIOS Date:	03/06/2023
BIOS Revision:	1.30
Firmware Revision:	1.10

## Compiler Version Notes

=====

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

=====

Fortran | 648.exchange2\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM

-ffast-math -fopenmp -fsto -fstruct-layout=7

-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3

-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang

-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: basepeak = yes

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdaloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 10.9

SPECspeed®2017\_int\_peak = 11.1

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

## Peak Optimization Flags (Continued)

623.xalancbmk\_s (continued):

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html>  
<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml>  
<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(2.20 GHz, AMD EPYC 9734)

**SPECspeed®2017\_int\_base = 10.9**

**SPECspeed®2017\_int\_peak = 11.1**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jun-2023

**Hardware Availability:** Sep-2023

**Software Availability:** Apr-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-29 12:17:20-0400.

Report generated on 2023-07-19 16:29:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.