



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_base = 918
SPECrate®2017_fp_peak = 970

CPU2017 License: 3358


Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

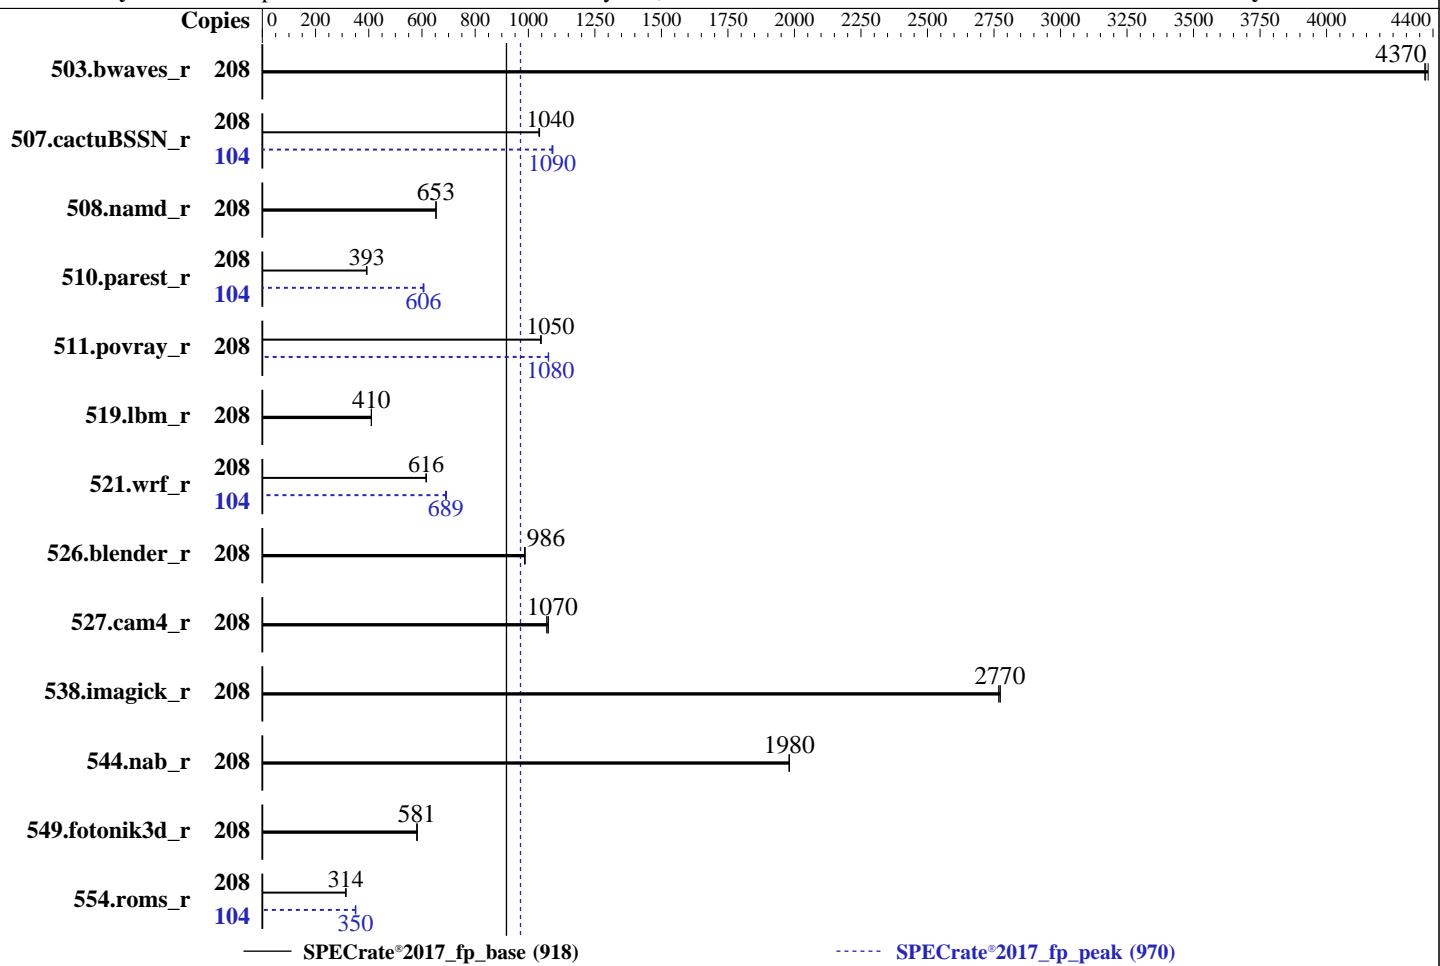

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8470N	OS:	Red Hat Enterprise Linux 9.0 (Plow)
Max MHz:	3600		5.14.0-70.22.1.el9_0.x86_64
Nominal:	1700	Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	104 cores, 2 chips, 2 threads/core		Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 03.01.00 released Dec-2022
L2:	2 MB I+D on chip per core	File System:	xfs
L3:	97.5 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)	Peak Pointers:	64-bit
Storage:	1 x 1 TB NVME SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	477	4370	476	4380	477	4370	208	477	4370	476	4380	477	4370
507.cactubSSN_r	208	253	1040	253	1040	253	1040	104	121	1090	121	1090	121	1090
508.namd_r	208	303	653	303	653	303	653	208	303	653	303	653	303	653
510.parest_r	208	1391	391	1386	393	1384	393	104	448	607	449	606	450	604
511.povray_r	208	464	1050	464	1050	463	1050	208	451	1080	452	1070	452	1080
519.lbm_r	208	535	410	535	410	535	410	208	535	410	535	410	535	410
521.wrf_r	208	756	616	757	616	756	616	104	338	689	338	689	337	692
526.blender_r	208	321	988	321	986	321	986	208	321	988	321	986	321	986
527.cam4_r	208	338	1080	339	1070	340	1070	208	338	1080	339	1070	340	1070
538.imagick_r	208	187	2770	187	2770	187	2770	208	187	2770	187	2770	187	2770
544.nab_r	208	177	1980	177	1980	177	1980	208	177	1980	177	1980	177	1980
549.fotonik3d_r	208	1395	581	1395	581	1393	582	208	1395	581	1395	581	1393	582
554.roms_r	208	1052	314	1056	313	1052	314	104	472	350	472	350	470	352

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = 970

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Jul 10 16:31:51 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
16:31:51 up 6:42, 1 user, load average: 156.18, 195.67, 202.96
USER      TTY      LOGIN@     IDLE     JCPU    PCPU WHAT
root      ttys1     09:49     6:41m   0.90s   0.01s sh
reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062088
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062088
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=104 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=104 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8470N
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b000130
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 52
siblings        : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 208
On-line CPU(s) list: 0-207
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8470N
BIOS Model name: Intel(R) Xeon(R) Platinum 8470N
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 52
Socket(s): 2
Stepping: 6
CPU max MHz: 3600.0000
CPU min MHz: 800.0000
BogoMIPS: 3400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
tsc_adjust bm1l avx2 smpf bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsaves xgetbv1 xsaves cqmq_llc cqmq_occu_llc
cqmq_mbmb_total cqmq_mbmb_local split_lock_detect avx_vnni avx512_bf16
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpocndq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxlldtrk pconfig
arch_lbr avx512_fp16_amx_tile flush_ll1d arch_capabilities
L1d cache: 4.9 MiB (104 instances)
L1i cache: 3.3 MiB (104 instances)
L2 cache: 208 MiB (104 instances)
L3 cache: 195 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-12,104-116
NUMA node1 CPU(s): 13-25,117-129
NUMA node2 CPU(s): 26-38,130-142
NUMA node3 CPU(s): 39-51,143-155
NUMA node4 CPU(s): 52-64,156-168
NUMA node5 CPU(s): 65-77,169-181
NUMA node6 CPU(s): 78-90,182-194
NUMA node7 CPU(s): 91-103,195-207
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	97.5M	195M	15	Unified	3	106496	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-12,104-116

node 0 size: 64037 MB

node 0 free: 51016 MB

node 1 cpus: 13-25,117-129

node 1 size: 64506 MB

node 1 free: 53865 MB

node 2 cpus: 26-38,130-142

node 2 size: 64506 MB

node 2 free: 53865 MB

node 3 cpus: 39-51,143-155

node 3 size: 64506 MB

node 3 free: 53853 MB

node 4 cpus: 52-64,156-168

node 4 size: 64506 MB

node 4 free: 53848 MB

node 5 cpus: 65-77,169-181

node 5 size: 64506 MB

node 5 free: 53864 MB

node 6 cpus: 78-90,182-194

node 6 size: 64506 MB

node 6 free: 53854 MB

node 7 cpus: 91-103,195-207

node 7 size: 64486 MB

node 7 free: 53501 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21
1:	12	10	12	12	21	21	21	21
2:	12	12	10	12	21	21	21	21
3:	12	12	12	10	21	21	21	21
4:	21	21	21	21	10	12	12	12
5:	21	21	21	21	12	10	12	12
6:	21	21	21	21	12	12	10	12
7:	21	21	21	21	12	12	12	10

9. /proc/meminfo

MemTotal: 527935528 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
10. who -r
    run-level 3 Jul 10 09:49

-----
11. Systemd service manager version: systemd 250 (250-6.e19_0)
    Default Target      Status
    multi-user          running

-----
12. Services, from systemctl list-unit-files
    STATE           UNIT FILES
    enabled         dbus-broker getty@ tuned udisks2 upower
    enabled-runtime systemd-remount-fs
    disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
                    blk-availability canberra-system-bootup canberra-system-shutdown
                    canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
                    debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
                    mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmbuild-rebuild
                    rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
                    systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
    indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.22.1.e19_0.x86_64
    root=/dev/mapper/rhel-root
    ro
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap

-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 3.60 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
        boost state support:
            Supported: yes
            Active: yes

-----
15. tuned-adm active
    Current active profile: throughput-performance

-----
16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space       2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes       0
    vm.dirty_background_ratio       10
    vm.dirty_bytes                  0
    vm.dirty_expire_centisecs      3000
    vm.dirty_ratio                  40
    vm.dirty_writeback_centisecs   500
    vm.dirtytime_expire_seconds    43200
    vm.extfrag_threshold           500
    vm.min_unmapped_ratio          1
    vm.nr_hugepages                 0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.nr_hugepages_mempolicy          0
vm.nr_overcommit_hugepages        0
vm.swappiness                      10
vm.watermark_boost_factor         15000
vm.watermark_scale_factor          10
vm.zone_reclaim_mode               0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap            64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
    system-release  Red Hat Enterprise Linux release 9.0 (Plow)

-----
20. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  819G  194G  626G  24% /home

-----
21. /sys/devices/virtual/dmi/id
Vendor:          IEIT
Product:         NF5280M7
Product Family: Not specified
Serial:          0000000000

-----
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     03.01.00
BIOS Date:        12/29/2022
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

`-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:

`-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -futto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-futto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECCrate®2017_fp_base = 918

NF5280M7 (Intel Xeon Platinum 8470N)

SPECCrate®2017_fp_peak = 970

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

```
527.cam4_r: basepeak = yes
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.propdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-10 16:31:50-0400.

Report generated on 2023-08-02 16:28:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.