



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11


(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

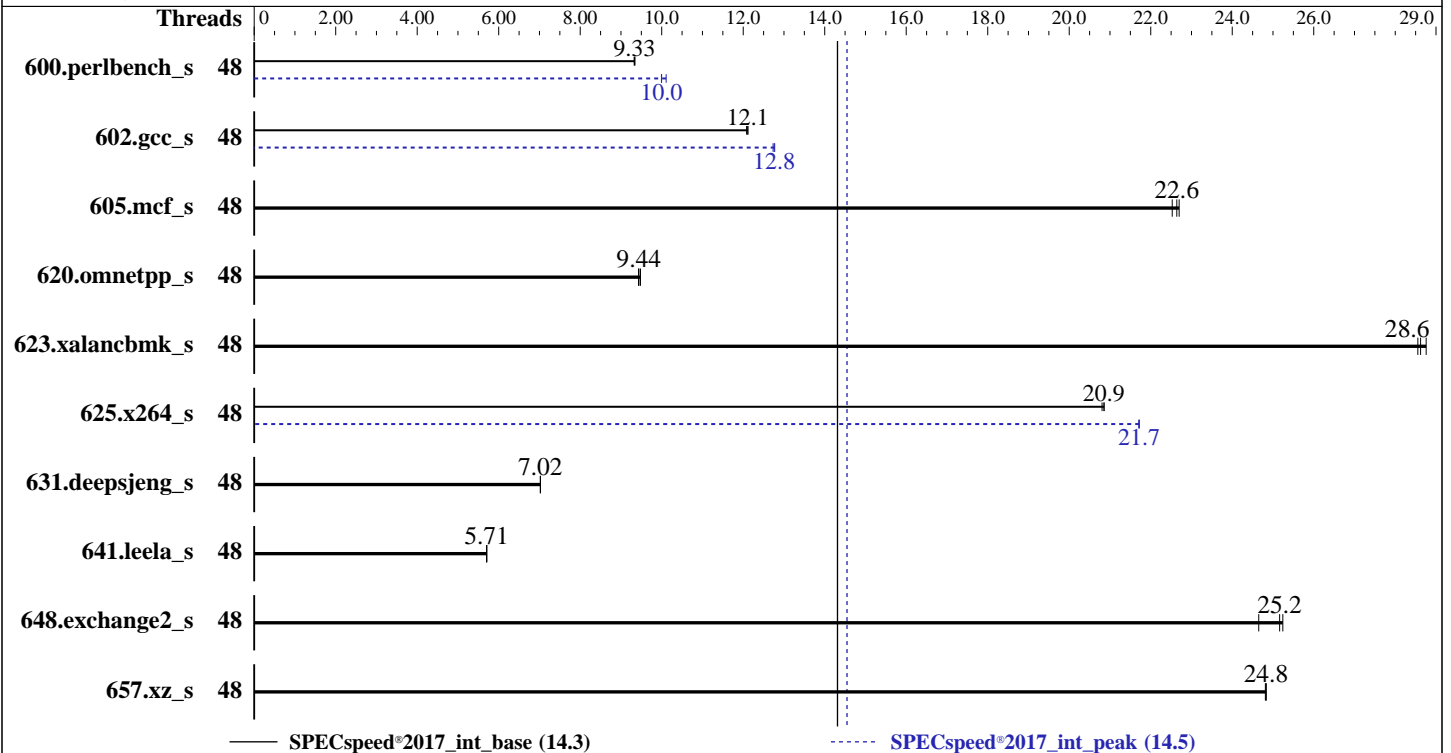

Hardware

CPU Name: Intel Xeon Gold 5418Y
 Max MHz: 3800
 Nominal: 2000
 Enabled: 48 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
 Storage: 1 x 1.6 TB NVMe SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: HPE BIOS Version v1.40 06/1/2023 released Jun-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	190	9.33	190	9.33	190	9.34	48	178	9.99	178	10.0	176	10.1
602.gcc_s	48	329	12.1	329	12.1	330	12.1	48	312	12.8	312	12.8	313	12.7
605.mcf_s	48	208	22.7	209	22.6	210	22.5	48	208	22.7	209	22.6	210	22.5
620.omnetpp_s	48	173	9.44	173	9.43	172	9.48	48	173	9.44	173	9.43	172	9.48
623.xalancbmk_s	48	49.3	28.8	49.6	28.6	49.5	28.6	48	49.3	28.8	49.6	28.6	49.5	28.6
625.x264_s	48	84.6	20.9	84.6	20.9	84.8	20.8	48	81.3	21.7	81.2	21.7	81.2	21.7
631.deepsjeng_s	48	204	7.02	204	7.02	204	7.02	48	204	7.02	204	7.02	204	7.02
641.leela_s	48	299	5.70	299	5.71	299	5.71	48	299	5.70	299	5.71	299	5.71
648.exchange2_s	48	117	25.2	119	24.7	116	25.2	48	117	25.2	119	24.7	116	25.2
657.xz_s	48	249	24.8	249	24.8	249	24.8	48	249	24.8	249	24.8	249	24.8

SPECspeed®2017_int_base = **14.3**

SPECspeed®2017_int_peak = **14.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000461 for the Intel Xeon Gold 5418Y Processor

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Sub-NUMA Clustering set to Enabled SNC2(2-clusters)

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Wed Jul 12 00:38:26 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. w
00:38:26 up 0 min, 0 users, load average: 0.08, 0.03, 0.01
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062767
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062767
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/intspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.003/templogs/preenv.intspeed.003.0.log
--lognum 003.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5418Y

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 7
stepping      : 8
microcode     : 0x2b000461
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 24
siblings      : 24
```

2 physical ids (chips)

48 processors (hardware threads)

physical id 0: core ids 0-23

physical id 1: core ids 0-23

physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46

physical id 1: apicids

128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

WARNING: More than one value seen for: stepping

WARNING: the 'lscpu' utility claims that 1 "Socket(s)" were seen, which does not match the 2 "physical id"s seen in /proc/cpuinfo. Please verify counts independently.

WARNING: the number of "processors" from /proc/cpuinfo does not seem to match the number of hardware threads as reported by lscpu. Please verify counts independently.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 5418Y
BIOS Model name:       Intel(R) Xeon(R) Gold 5418Y
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    12
Socket(s):              1
Stepping:               7
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Model name: Intel(R) Xeon(R) Gold 5418Y
BIOS Model name: Intel(R) Xeon(R) Gold 5418Y
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 1
Stepping: 8
BogoMIPS: 3981.31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Model name: Intel(R) Xeon(R) Gold 5418Y
BIOS Model name: Intel(R) Xeon(R) Gold 5418Y
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 1
Stepping: 7
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Model name: Intel(R) Xeon(R) Gold 5418Y
BIOS Model name: Intel(R) Xeon(R) Gold 5418Y
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 1
Stepping: 8
BogoMIPS: 3981.31

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

```
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 96 MiB (48 instances)
L3 cache: 90 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 128715 MB
node 0 free: 128366 MB
node 1 cpus: 6-11,30-35
node 1 size: 129021 MB
node 1 free: 128329 MB
node 2 cpus: 12-17,36-41
node 2 size: 129021 MB
node 2 free: 128778 MB
node 3 cpus: 18-23,42-47
node 3 size: 128974 MB
node 3 free: 128769 MB
node distances:
node 0 1 2 3
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
0: 10 20 30 30
1: 20 10 30 30
2: 30 30 10 20
3: 30 30 20 10
```

9. /proc/meminfo
MemTotal: 528109224 kB

10. who -r
run-level 3 Jul 12 00:37

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait chronyd console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
indirect	

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs      1.4T      153G    1.3T   11% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         HPE
Product:        ProLiant DL380a Gen11
Product Family: ProLiant
Serial:         CNX22602MZ

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  7x Hynix HMC88AEBRA168N 32 GB 2 rank 4800, configured at 4400
  6x Hynix HMC88MEBRA113N 32 GB 2 rank 4800, configured at 4400

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

3x Hynix HMC88MEBRA115N 32 GB 2 rank 4800, configured at 4400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.40
BIOS Date: 06/01/2023
BIOS Revision: 1.40
Firmware Revision: 1.30

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Fortran benchmarks:

```

-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Gold 5418Y)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = 14.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-11 15:08:26-0400.

Report generated on 2024-01-29 18:00:00 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-01.