



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_fp\_base = 899

### PowerEdge XE8640 (Intel Xeon Platinum 8470)

### SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573


Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

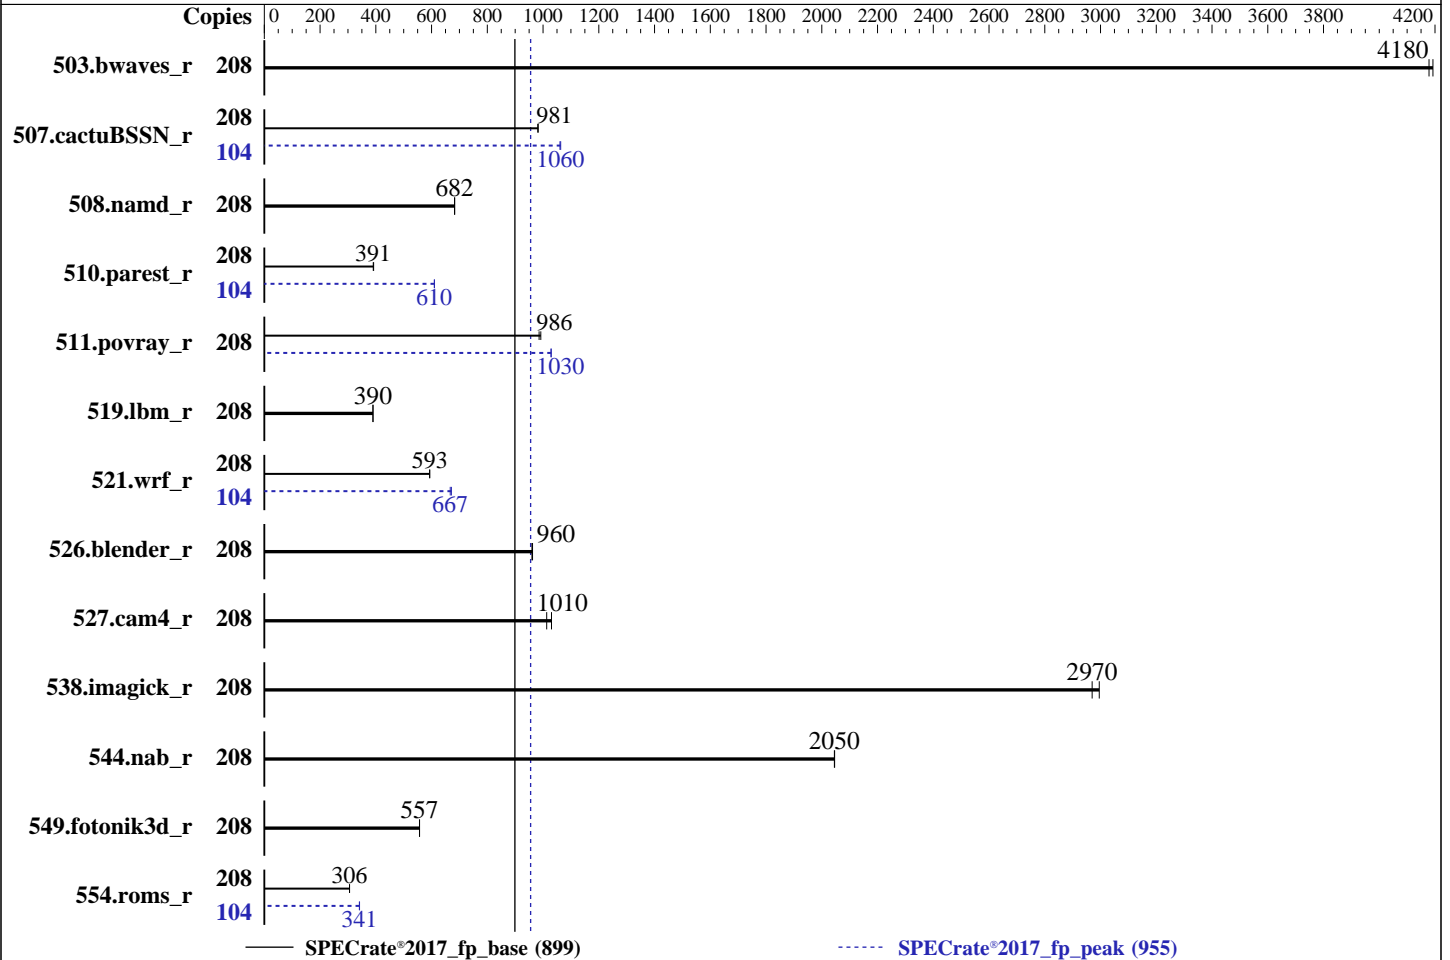

### Hardware

CPU Name: Intel Xeon Platinum 8470  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 104 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 120 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 1.2.1 released May-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	<b>499</b>	<b>4180</b>	497	4190			208	<b>499</b>	<b>4180</b>	497	4190		
507.cactuBSSN_r	208	268	983	<b>268</b>	<b>981</b>			104	<b>124</b>	<b>1060</b>	124	1060		
508.namd_r	208	<b>290</b>	<b>682</b>	289	683			208	<b>290</b>	<b>682</b>	289	683		
510.parest_r	208	<b>1392</b>	<b>391</b>	1388	392			104	<b>446</b>	<b>610</b>	446	611		
511.povray_r	208	490	992	<b>493</b>	<b>986</b>			208	<b>472</b>	<b>1030</b>	472	1030		
519.lbm_r	208	<b>562</b>	<b>390</b>	562	390			208	<b>562</b>	<b>390</b>	562	390		
521.wrf_r	208	785	593	<b>785</b>	<b>593</b>			104	347	671	<b>349</b>	<b>667</b>		
526.blender_r	208	<b>330</b>	<b>960</b>	329	962			208	<b>330</b>	<b>960</b>	329	962		
527.cam4_r	208	<b>359</b>	<b>1010</b>	353	1030			208	<b>359</b>	<b>1010</b>	353	1030		
538.imagick_r	208	<b>174</b>	<b>2970</b>	173	3000			208	<b>174</b>	<b>2970</b>	173	3000		
544.nab_r	208	171	2050	<b>171</b>	<b>2050</b>			208	171	2050	<b>171</b>	<b>2050</b>		
549.fotonik3d_r	208	<b>1456</b>	<b>557</b>	1455	557			208	<b>1456</b>	<b>557</b>	1455	557		
554.roms_r	208	1081	306	<b>1082</b>	<b>306</b>			104	484	342	<b>485</b>	<b>341</b>		

SPECrate®2017\_fp\_base = **899**

SPECrate®2017\_fp\_peak = **955**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOCCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 120 GB ramdisk created with the cmd: "mount -t tmpfs -o size=120G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```

    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
    DCU Streamer Prefetcher : Disabled
    Sub NUMA Cluster : 4-way Clustering
    LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    CIE : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
    Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Jun 26 18:25:13 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 18:25:13 up 4:51, 2 users, load average: 136.26, 190.18, 200.34
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      :        :             13:42      ?xdm?      11:56     0.01s    gdm-session-worker [pam/gdm-password]
root      :1       :             13:42      ?xdm?      11:56     0.00s    /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124423
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124423
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
/usr/lib/systemd/systemd --user
/usr/lib/gnome-terminal-server
bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4 --define DL-VERS=v4.5 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4 --define DL-VERS=v4.5 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=104 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=4
--define DL-VERS=v4.5 --output_format csv,html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=104 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define
DL-BIOS-SNC=4 --define DL-VERS=v4.5 --output_format csv,html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8470
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0004b1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 52
siblings       : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 208
On-line CPU(s) list: 0-207
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8470
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 52
Socket(s): 2
Stepping: 8
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_fp\_base = 899

## PowerEdge XE8640 (Intel Xeon Platinum 8470)

## SPECrate®2017\_fp\_peak = 955

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcndq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities
```

```
L1d cache: 4.9 MiB (104 instances)
L1i cache: 3.3 MiB (104 instances)
L2 cache: 208 MiB (104 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0,8,16,24,32,38,46,54,62,70,78,86,96,104,112,120,128,136,142,150,158,166,174,182,190,200
NUMA node1 CPU(s): 4,12,20,28,36,42,50,58,66,74,82,90,100,108,116,124,132,140,146,154,162,170,178,186,194,204
NUMA node2 CPU(s): 2,10,18,26,34,40,48,56,64,72,80,88,98,106,114,122,130,138,144,152,160,168,176,184,192,202
NUMA node3 CPU(s): 6,14,22,30,44,52,60,68,76,84,92,94,102,110,118,126,134,148,156,164,172,180,188,196,198,206
NUMA node4 CPU(s): 1,9,17,25,33,35,39,47,55,69,75,83,97,105,113,121,129,137,139,143,151,159,173,179,187,201
NUMA node5 CPU(s): 5,13,21,29,43,51,59,65,73,79,87,93,101,109,117,125,133,147,155,163,169,177,183,191,197,205
NUMA node6 CPU(s): 3,11,19,27,41,49,57,63,71,77,85,91,99,107,115,123,131,145,153,161,167,175,181,189,195,203
NUMA node7 CPU(s): 7,15,23,31,37,45,53,61,67,81,89,95,103,111,119,127,135,141,149,157,165,171,185,193,199,207
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0,8,16,24,32,38,46,54,62,70,78,86,96,104,112,120,128,136,142,150,158,166,174,182,190,200
node 0 size: 128397 MB
node 0 free: 127102 MB
node 1 cpus: 4,12,20,28,36,42,50,58,66,74,82,90,100,108,116,124,132,140,146,154,162,170,178,186,194,204
node 1 size: 129017 MB
node 1 free: 127928 MB
node 2 cpus: 2,10,18,26,34,40,48,56,64,72,80,88,98,106,114,122,130,138,144,152,160,168,176,184,192,202
node 2 size: 129017 MB
node 2 free: 128080 MB
node 3 cpus: 6,14,22,30,44,52,60,68,76,84,92,94,102,110,118,126,134,148,156,164,172,180,188,196,198,206
node 3 size: 129017 MB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

node 3 free: 123738 MB
node 4 cpus: 1,9,17,25,33,35,39,47,55,69,75,83,97,105,113,121,129,137,139,143,151,159,173,179,187,201
node 4 size: 129017 MB
node 4 free: 127672 MB
node 5 cpus: 5,13,21,29,43,51,59,65,73,79,87,93,101,109,117,125,133,147,155,163,169,177,183,191,197,205
node 5 size: 129017 MB
node 5 free: 128154 MB
node 6 cpus: 3,11,19,27,41,49,57,63,71,77,85,91,99,107,115,123,131,145,153,161,167,175,181,189,195,203
node 6 size: 128982 MB
node 6 free: 128029 MB
node 7 cpus: 7,15,23,31,37,45,53,61,67,81,89,95,103,111,119,127,135,141,149,157,165,171,185,193,199,207
node 7 size: 128663 MB
node 7 free: 120738 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 21 21 21 21
  1: 12 10 12 12 21 21 21 21
  2: 12 12 10 12 21 21 21 21
  3: 12 12 12 10 21 21 21 21
  4: 21 21 21 21 10 12 12 12
  5: 21 21 21 21 12 10 12 12
  6: 21 21 21 21 12 12 10 12
  7: 21 21 21 21 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:      1055878136 kB

```

```

10. who -r
    run-level 5 Jun 26 13:35

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    graphical        running

```

```

12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron
display-manager firewallld getty@ haveged irqbalance iscsi issue-generator kbdsettings
kdump kdump-early klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels
rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny wpa_supplicant
enabled-runtime                      systemd-remount-fs
disabled                             NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh
boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed
debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once
haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiui
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap
nm-cloud-setup nmb nvme-autoconnect openvpn@ ostree-remount pppoe pppoe-server rdisc
rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator
systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2 upower wpa_supplicant@
indirect                             pcsd saned@ wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=96676a86-8cd3-46ed-9bba-65753961bf30
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=307M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

### 19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 120G 4.2G 116G 4% /mnt/ramdisk

### 20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge XE8640  
Product Family: PowerEdge  
Serial: 1234567

### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.2.1  
BIOS Date: 05/17/2023  
BIOS Revision: 1.2

## Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Base Portability Flags (Continued)

507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

### Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-gopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 899

PowerEdge XE8640 (Intel Xeon Platinum 8470)

SPECrate®2017\_fp\_peak = 955

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-gopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-26 18:25:13-0400.

Report generated on 2023-08-16 14:16:00 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.