



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

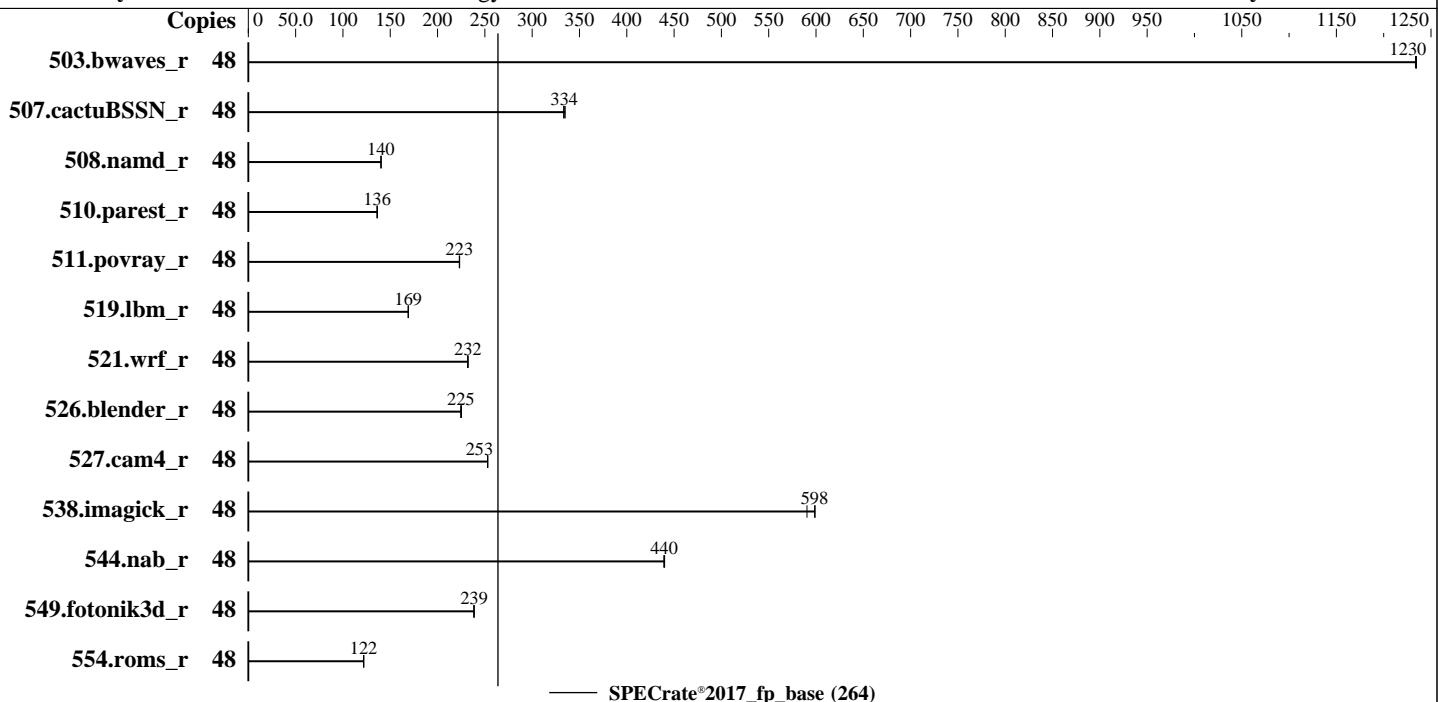

### Hardware

CPU Name: Intel Xeon Gold 5411N  
Max MHz: 3900  
Nominal: 1900  
Enabled: 24 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 45 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
Compiler: Kernel 5.14.21-150400.22-default  
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Lenovo BIOS Version USE113Y 2.10 released Mar-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	390	1230	390	1230	<b>390</b>	<b>1230</b>							
507.cactuBSSN_r	48	182	333	181	335	<b>182</b>	<b>334</b>							
508.namd_r	48	325	140	325	140	<b>325</b>	<b>140</b>							
510.parest_r	48	921	136	<b>922</b>	<b>136</b>	923	136							
511.povray_r	48	<b>502</b>	<b>223</b>	502	223	503	223							
519.lbm_r	48	<b>299</b>	<b>169</b>	299	169	299	169							
521.wrf_r	48	<b>463</b>	<b>232</b>	464	232	463	232							
526.blender_r	48	324	225	<b>325</b>	<b>225</b>	325	225							
527.cam4_r	48	<b>332</b>	<b>253</b>	332	253	332	253							
538.imagick_r	48	199	599	202	590	<b>199</b>	<b>598</b>							
544.nab_r	48	<b>184</b>	<b>440</b>	184	439	184	440							
549.fotonik3d_r	48	<b>784</b>	<b>239</b>	785	238	784	239							
554.roms_r	48	<b>626</b>	<b>122</b>	626	122	625	122							

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

LLC Prefetch set to Disabled

AMP Prefetch set to Enable

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Jul 16 17:43:56 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
17:43:56 up 1 min, 1 user, load average: 0.04, 0.02, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

```
root      tty1      -          17:43   10.00s  0.77s  0.00s -bash
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 1030494  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 1030494  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c  
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=24 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile  
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=24 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile  
  $SPEC/tmp/CPU2017.182/templogs/preenv.fprate.182.0.log --lognum 182.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu/2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo  
model name          : Intel(R) Xeon(R) Gold 5411N  
vendor_id           : GenuineIntel  
cpu family          : 6  
model               : 143  
stepping             : 8  
microcode           : 0x2b000190  
bugs                : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores            : 24  
siblings              : 48  
1 physical ids (chips)  
48 processors (hardware threads)  
physical id 0: core ids 0-23  
physical id 0: apicids 0-47
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

-----  
7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 5411N
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 1
Stepping: 8
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
      bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
      tsxldtrk pconfig arch_lbr avx512_fp16 flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 48 MiB (24 instances)
L3 cache: 45 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	45M	45M	15	Unified	3	49152	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

8. numactl --hardware  
NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0-11,24-35  
node 0 size: 128649 MB  
node 0 free: 127922 MB  
node 1 cpus: 12-23,36-47  
node 1 size: 128998 MB  
node 1 free: 128490 MB  
node distances:  
node 0 1  
0: 10 12  
1: 12 10

9. /proc/meminfo  
MemTotal: 263830960 kB

10. who -r  
run-level 3 Jul 16 17:42

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance  
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog  
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chrony console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load  
lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd  
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=17904382-c2c1-4de4-88b3-dda5a45ba9e5  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

```
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag               1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

```
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda2    xfs   894G  82G  812G  10%  /
```

```
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem ST650 V3 MAIN BOARD
Product Family: ThinkSystem
Serial:      MDSN00110D
```

```
21. dmidecode
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800, configured at 4400

---

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: USE113Y-2.10  
BIOS Date: 03/26/2023  
BIOS Revision: 2.10  
Firmware Revision: 2.10

---

## Compiler Version Notes

---

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

C++ | 508.namd\_r(base) 510.parest\_r(base)

---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

C++, C | 511.povray\_r(base) 526.blender\_r(base)

---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

C++, C, Fortran | 507.cactusBSSN\_r(base)

---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

---

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(1.90 GHz, Intel Xeon Gold 5411N)

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-16 05:43:56-0400.

Report generated on 2023-08-16 14:18:40 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.