



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

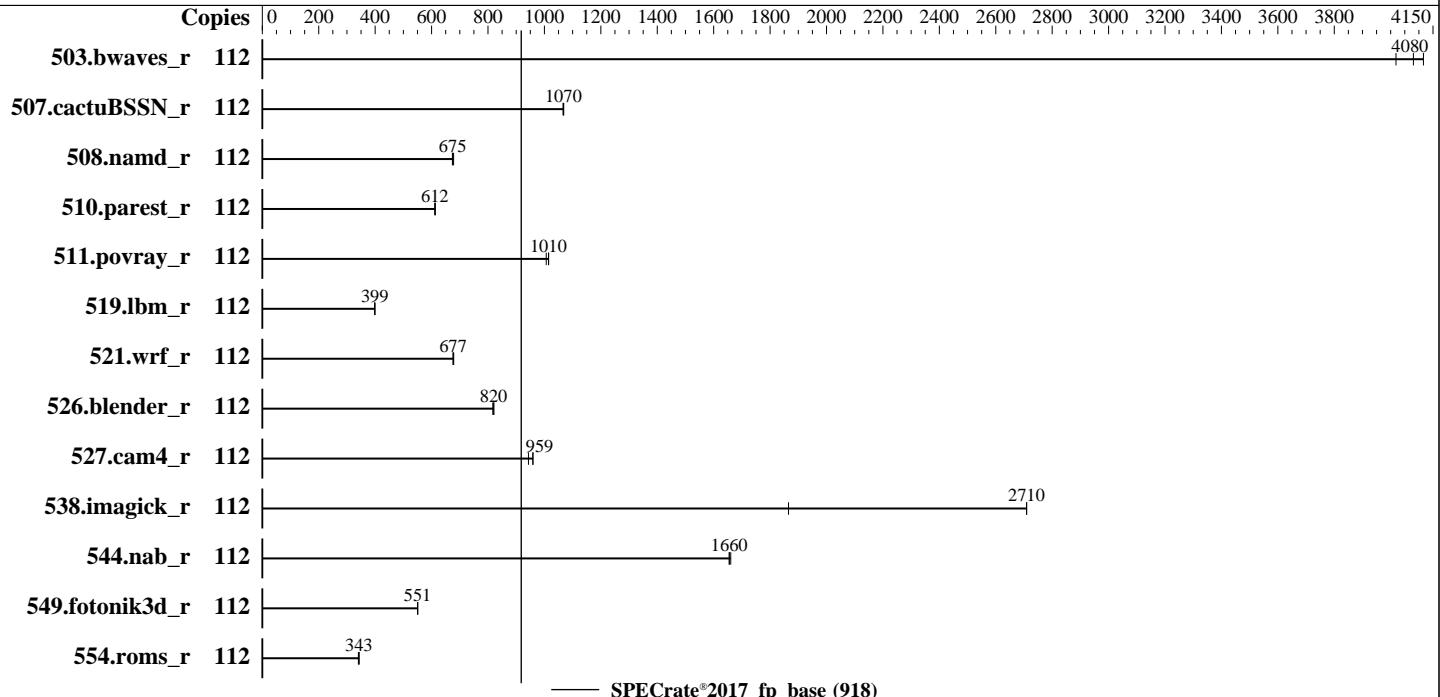

Hardware

CPU Name: Intel Xeon Platinum 8480CL
Max MHz: 3800
Nominal: 2000
Enabled: 112 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 1.9 TB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5 (x86_64)
Compiler: Kernel 5.14.21-150500.53-default
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version USE117U 3.11 released Jun-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	279	4020	275	4080	273	4120									
507.cactubSSN_r	112	133	1070	133	1070	133	1070									
508.namd_r	112	158	674	158	675	157	678									
510.parest_r	112	478	613	479	612	479	612									
511.povray_r	112	258	1010	258	1020	260	1010									
519.lbm_r	112	296	399	296	399	296	398									
521.wrf_r	112	371	676	370	678	371	677									
526.blender_r	112	208	821	208	820	209	817									
527.cam4_r	112	208	943	204	959	204	959									
538.imagick_r	112	149	1870	103	2710	103	2710									
544.nab_r	112	114	1660	114	1660	114	1660									
549.fotonik3d_r	112	793	550	793	551	792	551									
554.roms_r	112	519	343	523	340	519	343									

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

Hyper-Threading set to Disabled

SNC set to SNC4

MONITOR/MWAIT set to Enabled

XPT Prefetcher set to Disabled

LLC Prefetch set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Feb 28 20:03:12 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
```

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
2. w
20:03:12 up 3 min, 1 user, load average: 0.09, 0.04, 0.01
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	20:02	5.00s	1.09s	0.01s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c) unlimited
data seg size	(kbytes, -d) unlimited
scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 2062582
max locked memory	(kbytes, -l) 64
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 2062582
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=56 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=56 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.041/templogs/preenv.fprate.041.0.log --lognum 041.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) Platinum 8480CL
vendor_id	: GenuineIntel
cpu family	: 6
model	: 143
stepping	: 7
microcode	: 0xb0001b0
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss
cpu cores	: 56
siblings	: 56
2 physical ids (chips)	
112 processors (hardware threads)	
physical id 0: core ids 0-55	
physical id 1: core ids 0-55	
physical id 0: apicids	
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72	

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:  
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 112  
On-line CPU(s) list: 0-111  
Vendor ID: GenuineIntel  
Model name: Intel(R) Xeon(R) Platinum 8480CL  
CPU family: 6  
Model: 143  
Thread(s) per core: 1  
Core(s) per socket: 56  
Socket(s): 2  
Stepping: 7  
CPU max MHz: 3800.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4000.00  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology  
nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor  
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1 sse4_2  
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm  
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single  
intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase  
tsc_adjust bm1 hle avx2 smp bmi2 erms invpcid rtm cqmq rdt_a avx512f  
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd  
sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc  
cqmq_occup_llc cqmq_mbmb_total cqmq_mbmb_local split_lock_detect avx_vnni  
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke  
waitpkg avx512_vbmi2 gfn1 vaes vpclmulqdq avx512_vnni avx512_bitalg tme  
avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b  
enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16  
amx_tile flush_ll1 arch_capabilities  
L1d cache: 5.3 MiB (112 instances)  
L1i cache: 3.5 MiB (112 instances)  
L2 cache: 224 MiB (112 instances)  
L3 cache: 210 MiB (2 instances)  
NUMA node(s): 8  
NUMA node0 CPU(s): 0-13  
NUMA node1 CPU(s): 14-27  
NUMA node2 CPU(s): 28-41  
NUMA node3 CPU(s): 42-55  
NUMA node4 CPU(s): 56-69  
NUMA node5 CPU(s): 70-83  
NUMA node6 CPU(s): 84-97  
NUMA node7 CPU(s): 98-111  
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Platform Notes (Continued)

Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-13

node 0 size: 64172 MB

node 0 free: 63807 MB

node 1 cpus: 14-27

node 1 size: 64508 MB

node 1 free: 64220 MB

node 2 cpus: 28-41

node 2 size: 64508 MB

node 2 free: 64217 MB

node 3 cpus: 42-55

node 3 size: 64508 MB

node 3 free: 64238 MB

node 4 cpus: 56-69

node 4 size: 64508 MB

node 4 free: 64247 MB

node 5 cpus: 70-83

node 5 size: 64508 MB

node 5 free: 64299 MB

node 6 cpus: 84-97

node 6 size: 64473 MB

node 6 free: 63787 MB

node 7 cpus: 98-111

node 7 size: 64487 MB

node 7 free: 64258 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21
1:	12	10	12	12	21	21	21	21
2:	12	12	10	12	21	21	21	21
3:	12	12	12	10	21	21	21	21
4:	21	21	21	21	10	12	12	12
5:	21	21	21	21	12	10	12	12
6:	21	21	21	21	12	10	12	12
7:	21	21	21	21	12	12	10	10

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

MemTotal: 528051696 kB

10. who -r
run-level 3 Feb 28 20:00

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog sapconf smartd
sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievrd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect uuidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=5ba04850-656b-4e77-a732-28342819ead7
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "powersave" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 314572800
vm.dirty_background_ratio 0
vm.dirty_bytes 629145600
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 0
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

```
vm.nr_hugepages_mempolicy          0
vm.nr_overcommit_hugepages        0
vm.swappiness                      60
vm.watermark_boost_factor         15000
vm.watermark_scale_factor          10
vm.zone_reclaim_mode                0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap            64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
19. Disk information
    SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda3        xfs   1.8T  23G  1.8T   2%  /

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SD650 V3
    Product Family: ThinkSystem
    Serial:          9999999999

-----
21. dmidecode
    Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        4x SK Hynix HMCG88AEBRA115N 32 GB 2 rank 4800
        12x SK Hynix HMCG88AEBRA173N 32 GB 2 rank 4800

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:          Lenovo
    BIOS Version:         USE117U-3.11
    BIOS Date:            06/29/2023
    BIOS Revision:        3.11
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Platform Notes (Continued)

Firmware Revision: 2.11

System date/time for this result was not updated to right time
and actual testing date can be referred to "spec.cpu2017.test_date"

Compiler Version Notes

```
=====
C      | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++     | 508.namd_r(base) 510.parest_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++, C   | 511.povray_r(base) 526.blender_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran   | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECrate®2017_fp_base = 918

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-28 07:03:12-0500.

Report generated on 2023-08-23 10:15:16 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-23.