



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573


Test Date: Aug-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Mar-2023

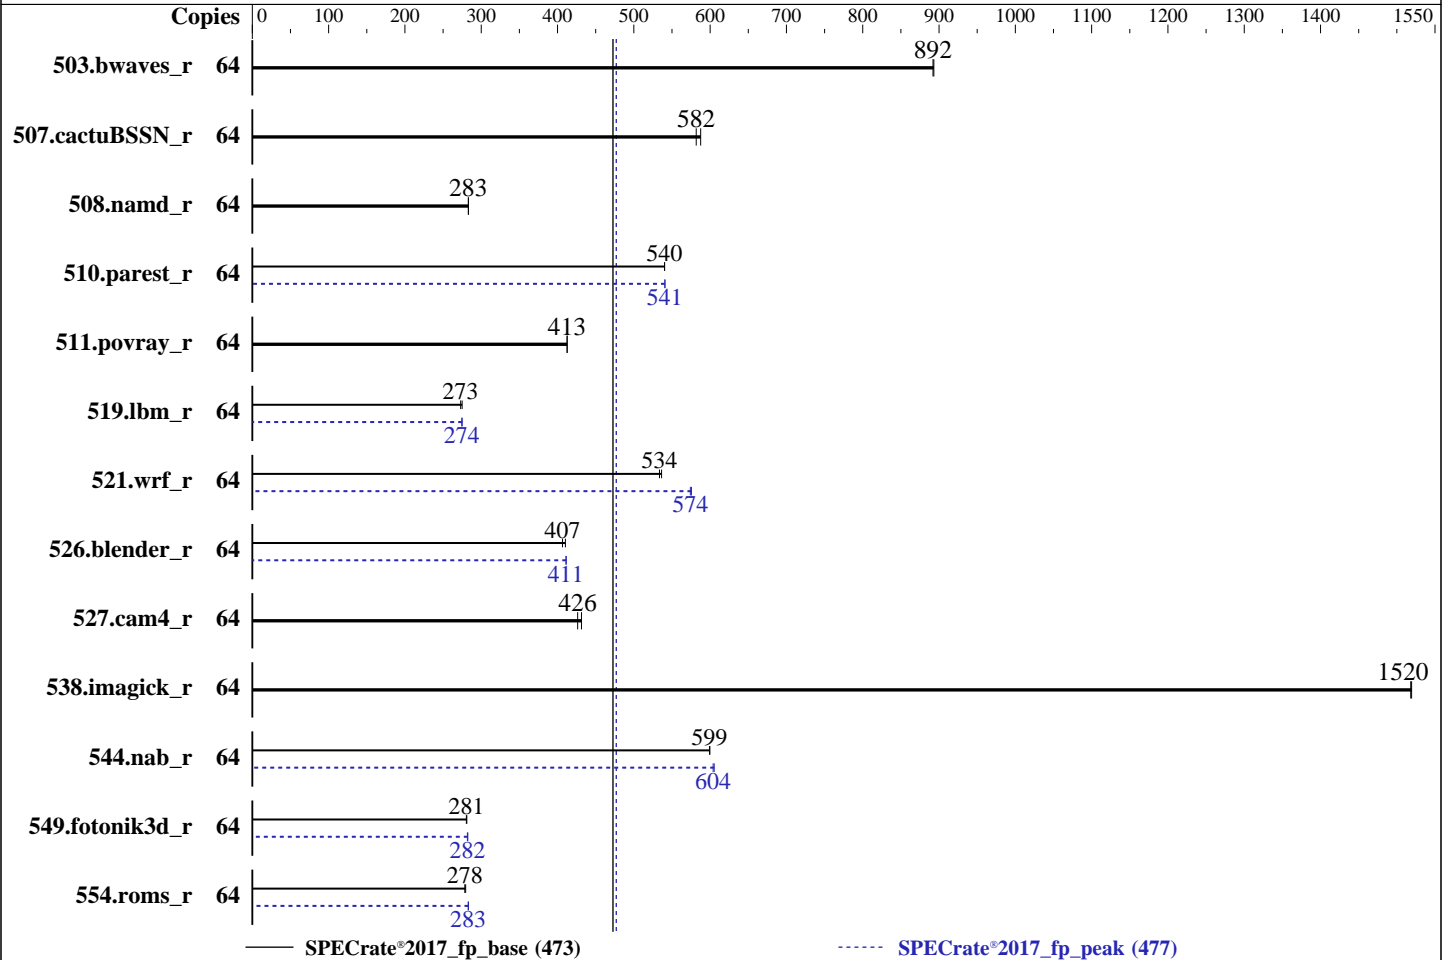

### Hardware

CPU Name: AMD EPYC 9384X  
 Max MHz: 3900  
 Nominal: 3100  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 60 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.2 LTS  
 5.15.0-67-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.4.5 released May-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2023  
Hardware Availability: Jul-2023  
Software Availability: Mar-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b>719</b>	<b>892</b>	719	893			64	<b>719</b>	<b>892</b>	719	893		
507.cactuBSSN_r	64	<b>139</b>	<b>582</b>	138	588			64	<b>139</b>	<b>582</b>	138	588		
508.namd_r	64	<b>215</b>	<b>283</b>	215	283			64	<b>215</b>	<b>283</b>	215	283		
510.parest_r	64	310	540	<b>310</b>	<b>540</b>			64	310	541	<b>310</b>	<b>541</b>		
511.povray_r	64	<b>362</b>	<b>413</b>	362	413			64	<b>362</b>	<b>413</b>	362	413		
519.lbm_r	64	<b>247</b>	<b>273</b>	245	275			64	245	275	<b>246</b>	<b>274</b>		
521.wrf_r	64	267	536	<b>269</b>	<b>534</b>			64	<b>250</b>	<b>574</b>	249	576		
526.blender_r	64	<b>240</b>	<b>407</b>	238	410			64	<b>237</b>	<b>411</b>	237	411		
527.cam4_r	64	259	431	<b>263</b>	<b>426</b>			64	259	431	<b>263</b>	<b>426</b>		
538.imagick_r	64	105	1520	<b>105</b>	<b>1520</b>			64	105	1520	<b>105</b>	<b>1520</b>		
544.nab_r	64	180	600	<b>180</b>	<b>599</b>			64	<b>178</b>	<b>604</b>	178	605		
549.fotonik3d_r	64	<b>889</b>	<b>281</b>	887	281			64	883	282	<b>885</b>	<b>282</b>		
554.roms_r	64	<b>365</b>	<b>278</b>	364	280			64	<b>360</b>	<b>283</b>	359	283		

SPECrate®2017\_fp\_base = **473**

SPECrate®2017\_fp\_peak = **477**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/amd_rate_aocc400_znver4_A_lib/lib:/mnt/ramdisk/cpu2017-1  
    .1.9-aocc400-znver4-A1/amd_rate_aocc400_znver4_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance  
    DIMM Self Healing on  
Uncorrectable Memory Error : Disabled  
Virtualization Technology : Disabled  
    L1 Stride Prefetcher: : Disabled  
    NUMA Nodes per Socket : 4  
    L3 Cache as NUMA Domain : Enabled
```

```
    System Profile : Custom  
    Memory Patrol Scrub : Disabled  
    PCI ASPM L1 Link  
    Power Management : Disabled  
    Determinism Slider : Power Determinism
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd-sut Wed Aug 9 21:20:09 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Mar-2023

## Platform Notes (Continued)

- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent\_hugepage
- 19. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux amd-sut 5.15.0-67-generic #74-Ubuntu SMP Wed Feb 22 14:14:39 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
 21:20:09 up 1 day,  5:41,  1 user,  load average: 47.02, 60.02, 62.21
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1    -             Tue15   2:52m  2.38s  0.42s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER:  root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093930
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_fp\_base = 473

### PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

## SPECrate®2017\_fp\_peak = 477

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Mar-2023

## Platform Notes (Continued)

```

/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-VirtD=1 --define DL-VERS=v4.6.1 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-VERS=v4.6.1
--output_format html,pdf,txt fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-VERS=v4.6.1
--output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size test:train:refrate fprate
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9384X 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101135
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 32
siblings       : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9384X 32-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             1
Stepping:              1
BogoMIPS:              6201.93
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_fp\_base = 473

### PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

## SPECrate®2017\_fp\_peak = 477

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Aug-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Mar-2023

### Platform Notes (Continued)

```
perfctr_core perfctr_nb bpxct perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
```

**Virtualization:**

L1d cache: 1 MiB (32 instances)  
L1i cache: 1 MiB (32 instances)  
L2 cache: 32 MiB (32 instances)  
L3 cache: 768 MiB (8 instances)  
NUMA node(s): 4

NUMA node0 CPU(s): 0-7,32-39  
NUMA node1 CPU(s): 8-15,40-47  
NUMA node2 CPU(s): 16-23,48-55  
NUMA node3 CPU(s): 24-31,56-63

Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

**From lscpu --cache:**

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	96M	768M	16	Unified	3	98304	1	64

**8. numactl --hardware**

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 193077 MB
node 0 free: 188719 MB
node 1 cpus: 8-15,40-47
node 1 size: 193530 MB
node 1 free: 192716 MB
node 2 cpus: 16-23,48-55
node 2 size: 193495 MB
node 2 free: 192707 MB
node 3 cpus: 24-31,56-63
node 3 size: 193492 MB
node 3 free: 192686 MB
node distances:
node  0  1  2  3
  0:  10  12  12  12
  1:  12  10  12  12
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Aug-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Mar-2023

### Platform Notes (Continued)

2: 12 12 10 12  
3: 12 12 12 10

9. /proc/meminfo  
MemTotal: 792162860 kB

10. who -r  
run-level 3 Aug 8 15:40

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)  
Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled blk-availability console-setup cron dmesg e2scrub\_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 vgauth wpa\_supplicant  
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-networkd-wait-online systemd-remount-fs  
disabled ModemManager apparmor console-getty debug-shell iscsid lvm2-monitor lxd-agent multipathd nftables rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysexit systemd-time-wait-sync ufw upower wpa\_supplicant-nl80211@ wpa\_supplicant-wired@ wpa\_supplicant@  
generated apport  
indirect uidd  
masked NetworkManager NetworkManager-dispatcher NetworkManager-wait-online cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.15.0-67-generic  
root=UUID=593ab29a-c8fe-4d75-821a-b60d5c945311  
ro

15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 3100MHz

16. tuned-adm active  
Current active profile: latency-performance

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 473

SPECrate®2017\_fp\_peak = 477

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Mar-2023

## Platform Notes (Continued)

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.2 LTS

```

```

-----
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 60G   3.5G  57G   6% /mnt/ramdisk

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R7615
Product Family: PowerEdge
Serial:          RDB5009

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.

BIOS Version: 1.4.5

BIOS Date: 05/29/2023

BIOS Revision: 1.4

## Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Compiler Version Notes (Continued)

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

```

C++ benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

```

Fortran benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:

`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:

`-Wno-unused-command-line-argument`

## Peak Compiler Invocation

C benchmarks:

`clang`

C++ benchmarks:

`clang++`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using both C and C++:

`clang++ clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math`

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Peak Optimization Flags (Continued)

519.lbm\_r (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick\_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 473

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

SPECrate®2017\_fp\_peak = 477

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2023

Hardware Availability: Jul-2023

Software Availability: Mar-2023

## Peak Optimization Flags (Continued)

554.roms\_r (continued):

-lamdalloc -lflang

Benchmarks using both Fortran and C:

521.wrf\_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-lflang

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt  
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm  
-lamdalloc

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECrate®2017\_fp\_base = 473**

PowerEdge R7615 (AMD EPYC 9384X 32-Core Processor)

**SPECrate®2017\_fp\_peak = 477**

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Mar-2023

## Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-09 17:20:08-0400.

Report generated on 2023-09-13 14:49:28 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.