



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion


SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Aug-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

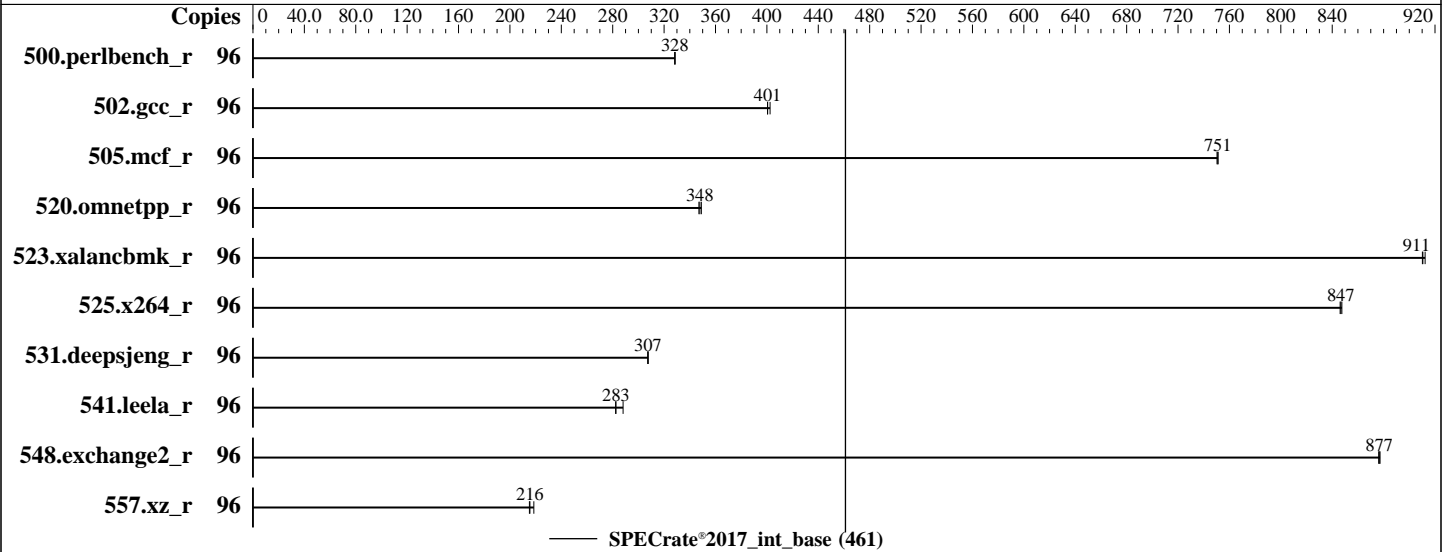

### Hardware

CPU Name: Intel Xeon Gold 6418H  
Max MHz: 4000  
Nominal: 2100  
Enabled: 48 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 1920 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
5.14.0-70.13.1.el9\_0.x86\_64  
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler  
for Linux;  
Parallel: No  
Firmware: Version 2.00.55 Released Mar-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost  
of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Aug-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	<b><u>465</u></b>	<b><u>328</u></b>	465	328	465	328							
502.gcc_r	96	338	402	339	401	<b><u>339</u></b>	<b><u>401</u></b>							
505.mcf_r	96	207	750	<b><u>207</u></b>	<b><u>751</u></b>	207	751							
520.omnetpp_r	96	<b><u>362</u></b>	<b><u>348</u></b>	361	349	363	347							
523.xalancbmk_r	96	<b><u>111</u></b>	<b><u>911</u></b>	111	912	111	910							
525.x264_r	96	199	846	198	848	<b><u>199</u></b>	<b><u>847</u></b>							
531.deepsjeng_r	96	<b><u>358</u></b>	<b><u>307</u></b>	358	307	358	307							
541.leela_r	96	552	288	<b><u>563</u></b>	<b><u>283</u></b>	563	282							
548.exchange2_r	96	287	877	287	876	<b><u>287</u></b>	<b><u>877</u></b>							
557.xz_r	96	474	219	<b><u>481</u></b>	<b><u>216</u></b>	482	215							

SPECrate®2017\_int\_base = 461

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/lib/ia32:/spec2017-icc2023.0/je5.0.1-32"  
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Aug 24 15:34:46 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
15:34:46 up 8 min, 1 user, load average: 0.07, 0.04, 0.01  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
root      tty1      15:34    14.00s   1.25s   0.04s  -bash
```

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority        (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2060130
max locked memory          (kbytes, -l) 64
max memory size            (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority         (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes         (-u) 2060130
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 96 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define
smt-on --define cores=48 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base --iterations 3 -o all intrate
runcpu --define default-platform-flags --copies 96 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --iterations 3 --output_format all
--nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.182/tempplogs/preenv.intrate.182.0.log --lognum 182.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017-icc2023.0
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6418H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b000111
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapsg
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6418H
BIOS Model name:       Intel(R) Xeon(R) Gold 6418H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               7
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-11,48-59
NUMA node1 CPU(s):    12-23,60-71
NUMA node2 CPU(s):    24-35,72-83
NUMA node3 CPU(s):    36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 128044 MB
node 0 free: 127041 MB
node 1 cpus: 12-23,60-71
node 1 size: 129018 MB
node 1 free: 128548 MB
node 2 cpus: 24-35,72-83
node 2 size: 129018 MB
node 2 free: 128574 MB
node 3 cpus: 36-47,84-95
node 3 size: 129007 MB
node 3 free: 128556 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 527452056 kB

10. who -r

run-level 3 Aug 24 15:26

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd switcheroo-control
sysstat systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

disabled      arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
               canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
               dbus-daemon debug-shell dnsmasq firewallld iprdump iprinit ipupdate iscsid iscsiui kpatch
               kvm_stat ledmon man-db-restart-cache-update nftables nvme-autoconnect podman
               podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts
               rpmdm-rebuild serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
               systemd-pstore systemd-sysext wpa_supplicant
indirect      spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=cc4bab05-907e-44ef-b818-2b2874390234
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=5ba347ca-8beb-4f6e-9c11-de63dc4ddf5f
rhgb
quiet

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                1
   max_ptes_none         511
   max_ptes_shared       256
   max_ptes_swap         64
   pages_to_scan         4096
   scan_sleep_millisecs 10000

```

```

20. OS release
   From /etc/*-release /etc/*-version
   os-release           Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release       Red Hat Enterprise Linux release 9.0 (Plow)
   system-release       Red Hat Enterprise Linux release 9.0 (Plow)

```

```

21. Disk information
   SPEC is set to: /spec2017-icc2023.0
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda3        xfs   420G  63G  358G  15% /

```

```

22. /sys/devices/virtual/dmi/id
   Vendor:           XFUSION
   Product:          5288 V7
   Product Family:   Eagle Stream
   Serial:           serial

```

```

23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

```

```

24. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      XFUSION
   BIOS Version:     2.00.55
   BIOS Date:        03/07/2023
   BIOS Revision:    0.55

```

### Compiler Version Notes

```

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

```

```

=====
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 461

FusionServer 5288 V7 (Intel Xeon Gold 6418H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Aug-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmallocc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-24 15:34:45-0400.

Report generated on 2024-01-29 18:07:44 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.