



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

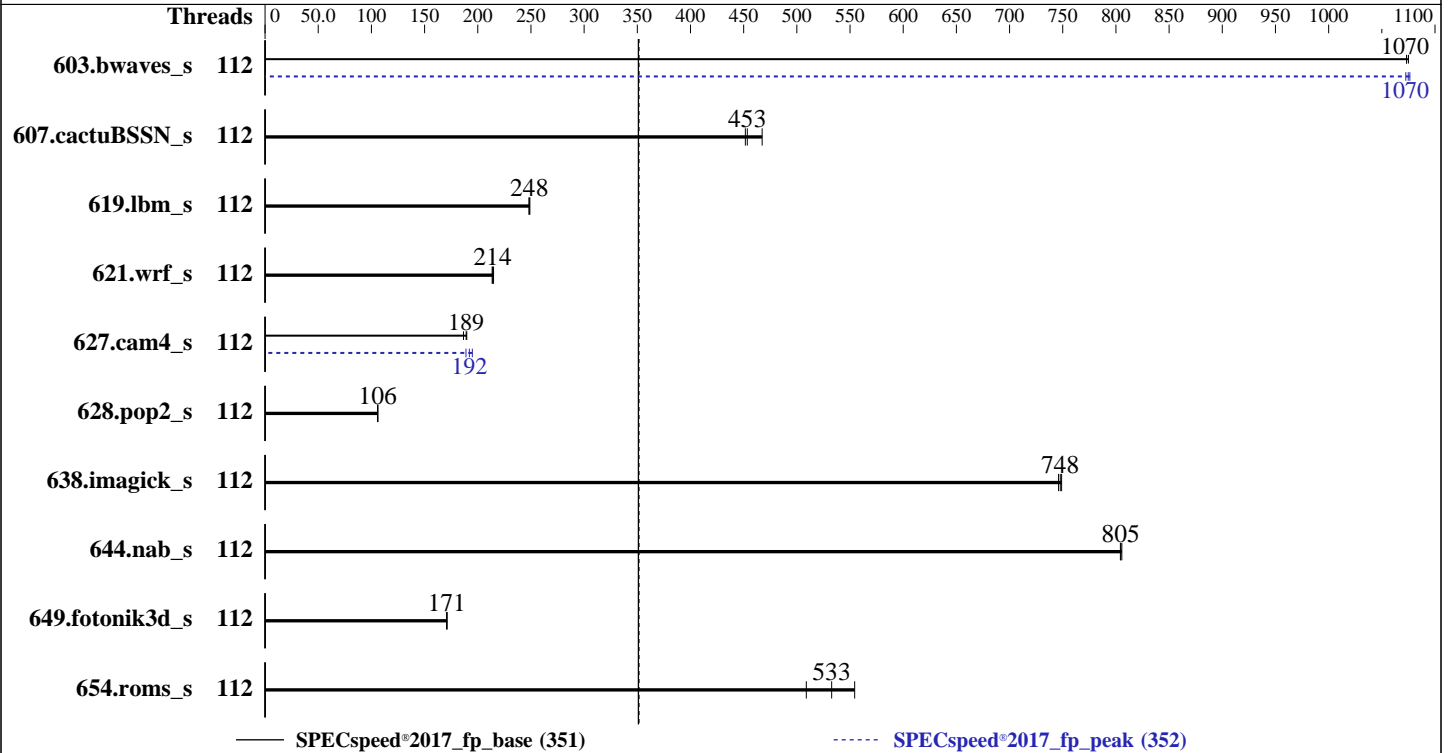

### Hardware

CPU Name: Intel Xeon Platinum 8480+  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 112 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 4.3.1d released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer power save  
 with minimal impact on performance



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

CPU2017 License: 9019  
Test Sponsor: Cisco Systems  
Tested by: Cisco Systems

Test Date: Sep-2023  
Hardware Availability: Mar-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	54.9	1080	<u>55.0</u>	<u>1070</u>	55.0	1070	112	<u>54.9</u>	<u>1070</u>	54.8	1080	55.0	1070
607.cactuBSSN_s	112	36.9	452	35.7	467	<u>36.8</u>	<u>453</u>	112	36.9	452	35.7	467	<u>36.8</u>	<u>453</u>
619.lbm_s	112	21.0	249	21.1	248	<u>21.1</u>	<u>248</u>	112	21.0	249	21.1	248	<u>21.1</u>	<u>248</u>
621.wrf_s	112	<u>61.8</u>	<u>214</u>	61.6	215	61.9	214	112	<u>61.8</u>	<u>214</u>	61.6	215	61.9	214
627.cam4_s	112	47.5	187	46.7	190	<u>46.9</u>	<u>189</u>	112	<u>46.1</u>	<u>192</u>	46.9	189	45.5	195
628.pop2_s	112	<u>112</u>	<u>106</u>	112	106	112	106	112	<u>112</u>	<u>106</u>	112	106	112	106
638.imagick_s	112	<u>19.3</u>	<u>748</u>	19.3	746	19.3	749	112	<u>19.3</u>	<u>748</u>	19.3	746	19.3	749
644.nab_s	112	21.7	804	21.7	806	<u>21.7</u>	<u>805</u>	112	21.7	804	21.7	806	<u>21.7</u>	<u>805</u>
649.fotonik3d_s	112	53.4	171	53.3	171	<u>53.3</u>	<u>171</u>	112	53.4	171	53.3	171	<u>53.3</u>	<u>171</u>
654.roms_s	112	<u>29.6</u>	<u>533</u>	28.4	554	30.9	509	112	<u>29.6</u>	<u>533</u>	28.4	554	30.9	509

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Platform Notes

### BIOS Settings:

Intel Hyper-Threading Technology set to Disabled  
Sub NUMA Clustering set to Disabled  
LLC Dead Line set to Disabled  
ADDDC Sparing set to Disabled  
Processor C6 Report set to Enabled  
UPI Link Enablement 1  
UPI Power Management Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on srv04 Tue Sep 5 22:55:58 2023

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux srv04 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86\_64  
x86\_64 x86\_64 GNU/Linux

-----

2. w  
22:55:58 up 1 min, 1 user, load average: 0.14, 0.11, 0.04  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 22:54 5.00s 1.46s 0.22s -bash

-----

3. Username  
From environment variable \$USER: root

-----

4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 4126898
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size        (kbytes, -s) unlimited
cpu time          (seconds, -t) unlimited
max user processes (-u) 4126898
virtual memory    (kbytes, -v) unlimited
file locks        (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112
--tune all -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=112 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.280/templogs/preenv.fpspeed.280.0.log --lognum 280.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8480+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 56
siblings       : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               112
On-line CPU(s) list: 0-111
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) Platinum 8480+
CPU family:           6
Model:                143
Thread(s) per core:  1
Core(s) per socket:  56
Socket(s):            2
Stepping:             8
CPU max MHz:          3800.0000
CPU min MHz:          800.0000
BogoMIPS:             4000.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                    avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                    ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                    amx_tile flush_l1d arch_capabilities

```

```

Virtualization:       VT-x
L1d cache:            5.3 MiB (112 instances)
L1i cache:            3.5 MiB (112 instances)
L2 cache:             224 MiB (112 instances)
L3 cache:             210 MiB (2 instances)
NUMA node(s):        2
NUMA node0 CPU(s):   0-55
NUMA node1 CPU(s):   56-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:  Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-55
node 0 size: 515695 MB
node 0 free: 513460 MB
node 1 cpus: 56-111
node 1 size: 516052 MB
node 1 free: 514293 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1056510684 kB
```

10. who -r

```
run-level 3 Sep 5 22:54
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wickedd wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once
haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=82136e43-7b14-445e-80c8-a54855d5e2c7
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "powersave" may decide which speed to use
within this range.
boost state support:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Supported: yes  
Active: yes

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sdb3   xfs   436G  14G  423G  4% /

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Cisco Systems Inc
Product:     UCSC-C240-M7SX
Serial:      WZP26360KC7

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

#### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C240M7.4.3.1d.0.0503232353  
BIOS Date: 05/03/2023  
BIOS Revision: 5.29

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.ibm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs

-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8480+, 2.00GHz)

SPECspeed®2017\_fp\_base = 351

SPECspeed®2017\_fp\_peak = 352

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-06 01:55:58-0400.

Report generated on 2023-11-21 20:28:49 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.