



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573


Test Date: Nov-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

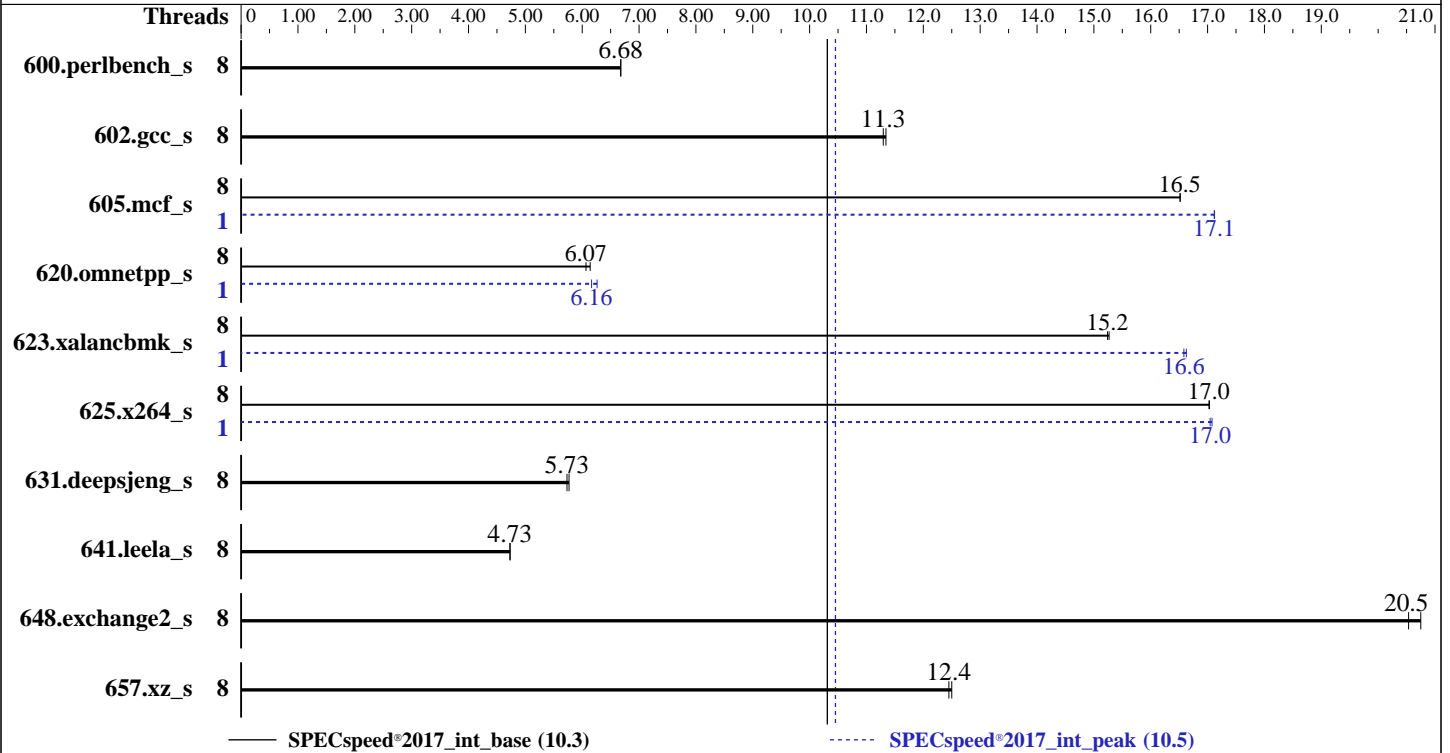

### Hardware

CPU Name: AMD EPYC 8024P  
 Max MHz: 3000  
 Nominal: 2400  
 Enabled: 8 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 32 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 192 GB (6 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 30 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.1.2 released Oct-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2023  
Hardware Availability: Dec-2023  
Software Availability: Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	<b>266</b>	<b>6.68</b>	266	6.68			8	<b>266</b>	<b>6.68</b>	266	6.68		
602.gcc_s	8	351	11.3	<b>353</b>	<b>11.3</b>			8	351	11.3	<b>353</b>	<b>11.3</b>		
605.mcf_s	8	<b>286</b>	<b>16.5</b>	286	16.5			1	276	17.1	<b>276</b>	<b>17.1</b>		
620.omnetpp_s	8	<b>269</b>	<b>6.07</b>	266	6.14			1	<b>265</b>	<b>6.16</b>	260	6.26		
623.xalancbmk_s	8	<b>93.0</b>	<b>15.2</b>	92.8	15.3			1	<b>85.4</b>	<b>16.6</b>	85.2	16.6		
625.x264_s	8	104	17.0	<b>104</b>	<b>17.0</b>			1	<b>103</b>	<b>17.0</b>	103	17.1		
631.deepsjeng_s	8	<b>250</b>	<b>5.73</b>	248	5.77			8	<b>250</b>	<b>5.73</b>	248	5.77		
641.leela_s	8	<b>361</b>	<b>4.73</b>	361	4.73			8	<b>361</b>	<b>4.73</b>	361	4.73		
648.exchange2_s	8	<b>143</b>	<b>20.5</b>	142	20.7			8	<b>143</b>	<b>20.5</b>	142	20.7		
657.xz_s	8	495	12.5	<b>497</b>	<b>12.4</b>			8	495	12.5	<b>497</b>	<b>12.4</b>		

SPECspeed®2017\_int\_base = **10.3**

SPECspeed®2017\_int\_peak = **10.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-7"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "8"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 30 GB ramdisk created with the cmd: "mount -t tmpfs -o size=30G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
```

```
Logical Processor : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 1
```

```
System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
Algorithm Performance
Boost Disable (ApbDis) : Enabled
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 10.3

SPECspeed®2017\_int\_peak = 10.5

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun Nov 5 11:44:13 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent\_hugepage
- 19. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
11:44:13 up 3 min, 1 user, load average: 0.43, 0.62, 0.29
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
root      tty1     -             11:43       28.00s     1.70s     0.29s     /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 771117
max locked memory      (kbytes, -l) 2097152
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority  (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 771117
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited
```

#### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8.1
--output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=1 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8.1 --output_format
html,pdf,txt intspeer
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=1 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-VERS=v4.8.1 --output_format
html,pdf,txt --nopower --runmode speed --tune base:peak --size test:train:refspeer intspeer --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeer.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
```

#### 6. /proc/cpuinfo

```
model name      : AMD EPYC 8024P 8-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00212
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 8
siblings       : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-3,16-19
physical id 0: apicids 0-3,16-19
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 8
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Nov-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

On-line CPU(s) list:          0-7
Vendor ID:                    AuthenticAMD
Model name:                    AMD EPYC 8024P 8-Core Processor
CPU family:                    25
Model:                          160
Thread(s) per core:           1
Core(s) per socket:           8
Socket(s):                      1
Stepping:                       2
Frequency boost:               enabled
CPU max MHz:                   3000.0000
CPU min MHz:                   1500.0000
BogoMIPS:                      4792.67
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm
                                constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                pni pclmulqdq monitor ssse3 fma cxl6 pcid sse4_1 sse4_2 x2apic movbe
                                popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:                AMD-V
L1d cache:                     256 KiB (8 instances)
L1i cache:                     256 KiB (8 instances)
L2 cache:                      8 MiB (8 instances)
L3 cache:                      32 MiB (2 instances)
NUMA node(s):                  1
NUMA node0 CPU(s):             0-7
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:             Not affected
Vulnerability Mds:              Not affected
Vulnerability Meltdown:         Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                filling
Vulnerability Srbds:            Not affected
Vulnerability Tsx async abort:   Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	256K	8	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	1M	8M	8	Unified	2	2048	1	64
L3	16M	32M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-7
node 0 size: 192803 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

node 0 free: 188761 MB  
node distances:  
node 0  
0: 10

9. /proc/meminfo  
MemTotal: 197430596 kB

10. who -r  
run-level 3 Nov 5 11:42

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* nscd.service loaded failed failed Name Service Cache Daemon

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@  
haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd  
nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd tuned wicked  
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm  
grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind  
rpmconfigcheck rsyncd serial-getty@ smartd-generate\_opts snmpd smptrapd  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd  
indirect wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=faeaf0cf-101a-4bde-8f53-32f9fd74a46a  
linux  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

15. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 2.40 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

16. tuned-adm active  
Current active profile: throughput-performance

```

17. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

18. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force

```

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 30G   3.4G  27G  12% /mnt/ramdisk

```

```

22. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6615
Product Family: PowerEdge
Serial:      SC665C3

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2023  
Hardware Availability: Dec-2023  
Software Availability: Nov-2022

## Platform Notes (Continued)

### 23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x 80CE000080CE M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.1.2  
BIOS Date: 10/16/2023  
BIOS Revision: 1.1

## Compiler Version Notes

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 648.exchange2\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU<sup>®</sup>2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed<sup>®</sup>2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed<sup>®</sup>2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 10.3

PowerEdge C6615 (AMD EPYC 8024P 8-Core Processor)

SPECspeed®2017\_int\_peak = 10.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-05 11:44:13-0500.

Report generated on 2023-12-06 19:41:07 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-06.