



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573


Test Date: Mar-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

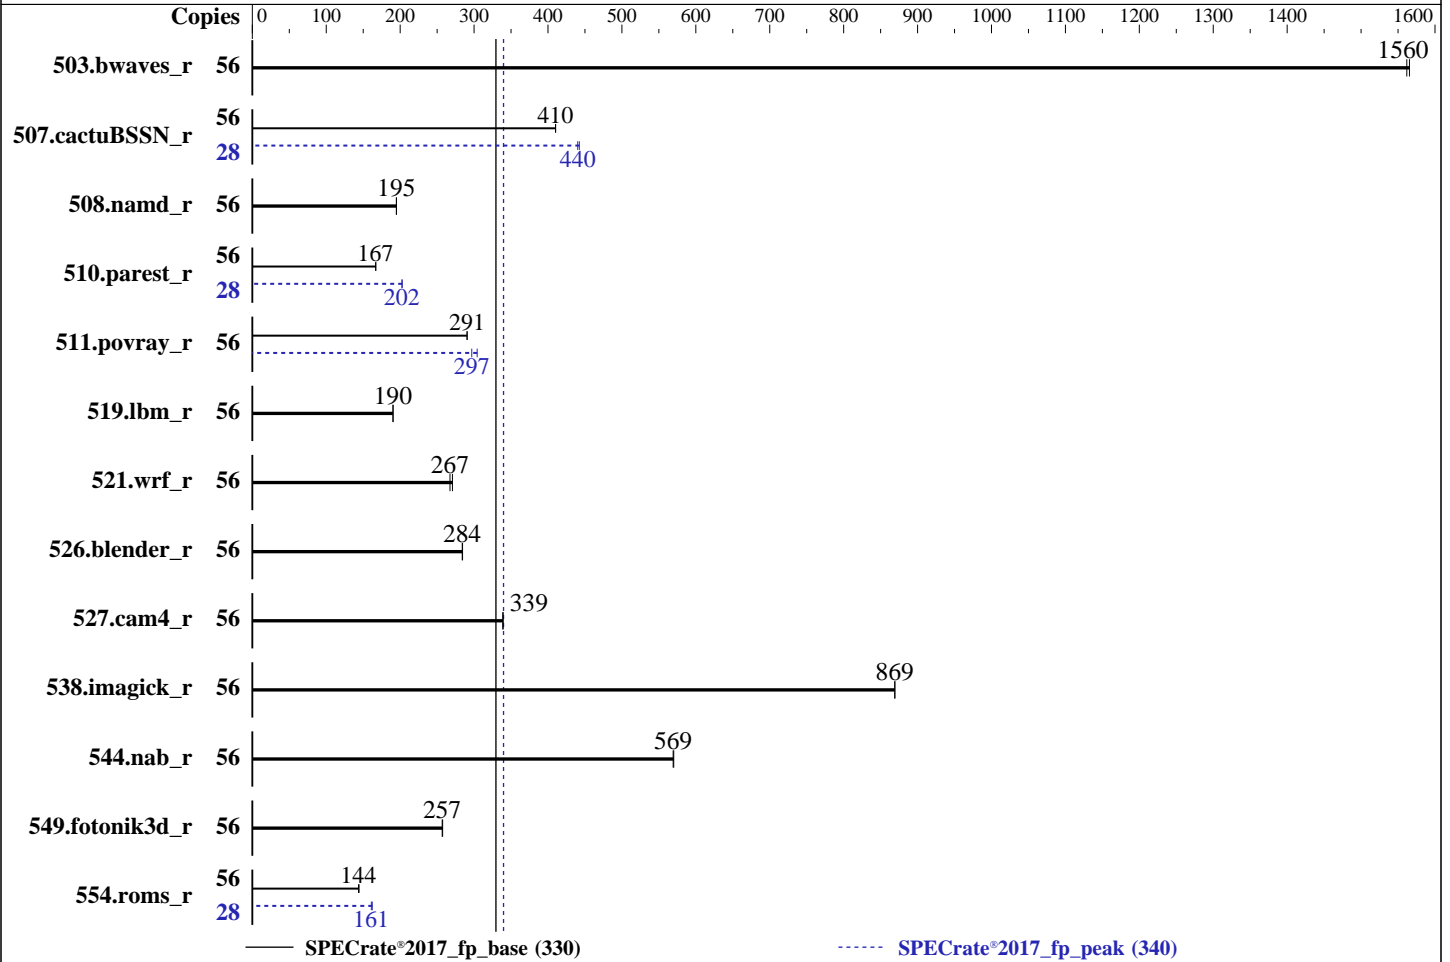

Hardware

CPU Name: Intel Xeon Gold 5512U
 Max MHz: 3700
 Nominal: 2100
 Enabled: 28 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 52.5 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 60 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran
 Compiler for Linux;
 Parallel: No
 Firmware: Version 1.9.12 released Nov-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	<u>360</u>	<u>1560</u>	359	1570			56	<u>360</u>	<u>1560</u>	359	1570		
507.cactuBSSN_r	56	<u>173</u>	<u>410</u>	173	410			28	80.1	442	<u>80.5</u>	<u>440</u>		
508.namd_r	56	<u>273</u>	<u>195</u>	273	195			56	<u>273</u>	<u>195</u>	273	195		
510.parest_r	56	877	167	<u>878</u>	<u>167</u>			28	361	203	<u>362</u>	<u>202</u>		
511.povray_r	56	<u>450</u>	<u>291</u>	450	291			56	<u>440</u>	<u>297</u>	430	304		
519.lbm_r	56	310	190	<u>310</u>	<u>190</u>			56	310	190	<u>310</u>	<u>190</u>		
521.wrf_r	56	<u>469</u>	<u>267</u>	463	271			56	<u>469</u>	<u>267</u>	463	271		
526.blender_r	56	300	284	<u>300</u>	<u>284</u>			56	300	284	<u>300</u>	<u>284</u>		
527.cam4_r	56	<u>289</u>	<u>339</u>	289	339			56	<u>289</u>	<u>339</u>	289	339		
538.imagick_r	56	<u>160</u>	<u>869</u>	160	869			56	<u>160</u>	<u>869</u>	160	869		
544.nab_r	56	165	570	<u>166</u>	<u>569</u>			56	165	570	<u>166</u>	<u>569</u>		
549.fotonik3d_r	56	<u>850</u>	<u>257</u>	848	257			56	<u>850</u>	<u>257</u>	848	257		
554.roms_r	56	<u>619</u>	<u>144</u>	616	144			28	274	162	<u>276</u>	<u>161</u>		

SPECrate®2017_fp_base = **330**

SPECrate®2017_fp_peak = **340**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOCCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled
DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : 2-way Clustering
LLC Prefetch : Disabled
Dead Line LLC Alloc : Disabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
CIE : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Mar 18 08:22:05 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpubower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
08:22:05 up 4:00, 1 user, load average: 32.55, 50.09, 53.71
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      tty1    -             04:23       3:58m      1.05s  0.00s /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2061831
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2061831
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=56 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=28 --define physicalfirst

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
--iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-addcd=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1 fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=56 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=28 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-addcd=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1 --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 5512U
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x210001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 28
siblings       : 56
1 physical ids (chips)
56 processors (hardware threads)
physical id 0: core ids 0-27
physical id 0: apicids 0-55
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 56
On-line CPU(s) list: 0-55
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 5512U
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 1
Stepping: 2
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities

L1d cache: 1.3 MiB (28 instances)
L1i cache: 896 KiB (28 instances)
L2 cache: 56 MiB (28 instances)
L3 cache: 52.5 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0,3,4,6,7,9,11,13,15,17,19,21,24,26,28,31,32,34,35,37,39,41,43,45,47,49,52,54
NUMA node1 CPU(s): 1,2,5,8,10,12,14,16,18,20,22,23,25,27,29,30,33,36,38,40,42,44,46,48,50,51,53,55
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.3M	12	Data	1	64	1	64
L1i	32K	896K	8	Instruction	1	64	1	64
L2	2M	56M	16	Unified	2	2048	1	64
L3	52.5M	52.5M	15	Unified	3	57344	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0,3-4,6-7,9,11,13,15,17,19,21,24,26,28,31-32,34-35,37,39,41,43,45,47,49,52,54
node 0 size: 257493 MB
node 0 free: 248437 MB
node 1 cpus: 1-2,5,8,10,12,14,16,18,20,22-23,25,27,29-30,33,36,38,40,42,44,46,48,50-51,53,55
node 1 size: 257994 MB
node 1 free: 257101 MB
node distances:
node 0 1
0: 10 12
1: 12 10

9. /proc/meminfo

MemTotal: 527859644 kB

10. who -r

run-level 3 Mar 18 04:22

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Date: Mar-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

Default Target	Status
multi-user	running

```

-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickd wickd-auto4
wickd-dhcp4 wickd-dhcp6 wickd-nanny
enabled-runtime                     systemd-remount-fs
disabled                             autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm
grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap nvme-fc-autoconnect rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect                             wickd
-----

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=2256bbe7-6a43-48d2-b3c7-349b7f589270
splash=silent
mitigations=auto
quiet
security=apparmor
-----

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----

```

```

-----
15. sysctl
kernel.numa_balancing                1
kernel.randomize_va_space            2
vm.compaction_proactiveness          20
vm.dirty_background_bytes            0
vm.dirty_background_ratio            10
vm.dirty_bytes                       0
vm.dirty_expire_centisecs            3000
vm.dirty_ratio                       20
vm.dirty_writeback_centisecs         500
vm.dirtytime_expire_seconds          43200
vm.extfrag_threshold                 500
vm.min_unmapped_ratio                1
vm.nr_hugepages                      0
vm.nr_hugepages_mempolicy            0
vm.nr_overcommit_hugepages          0
vm.swappiness                        60
vm.watermark_boost_factor            15000
vm.watermark_scale_factor            10
vm.zone_reclaim_mode                 0
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```
16. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvice [madvice] never
    enabled         [always] madvice never
    hpage_pmd_size 2097152
    shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5
```

```
-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 60G   4.1G   56G   7% /mnt/ramdisk
```

```
-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Dell Inc.
    Product:         PowerEdge R660
    Product Family: PowerEdge
    Serial:          SLR6602
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x 002C0632002C MTC40F2046S1RC56BG1 64 GB 2 rank 5600, configured at 4800
  6x 00AD063200AD HMC94AGBRA181N 64 GB 2 rank 5600, configured at 4800
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      Dell Inc.
    BIOS Version:     1.9.12
    BIOS Date:        11/10/2023
    BIOS Revision:    1.9
```

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 330

PowerEdge R660 (Intel Xeon Gold 5512U)

SPECrate®2017_fp_peak = 340

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-18 08:22:05-0400.

Report generated on 2024-04-11 16:37:38 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.