



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

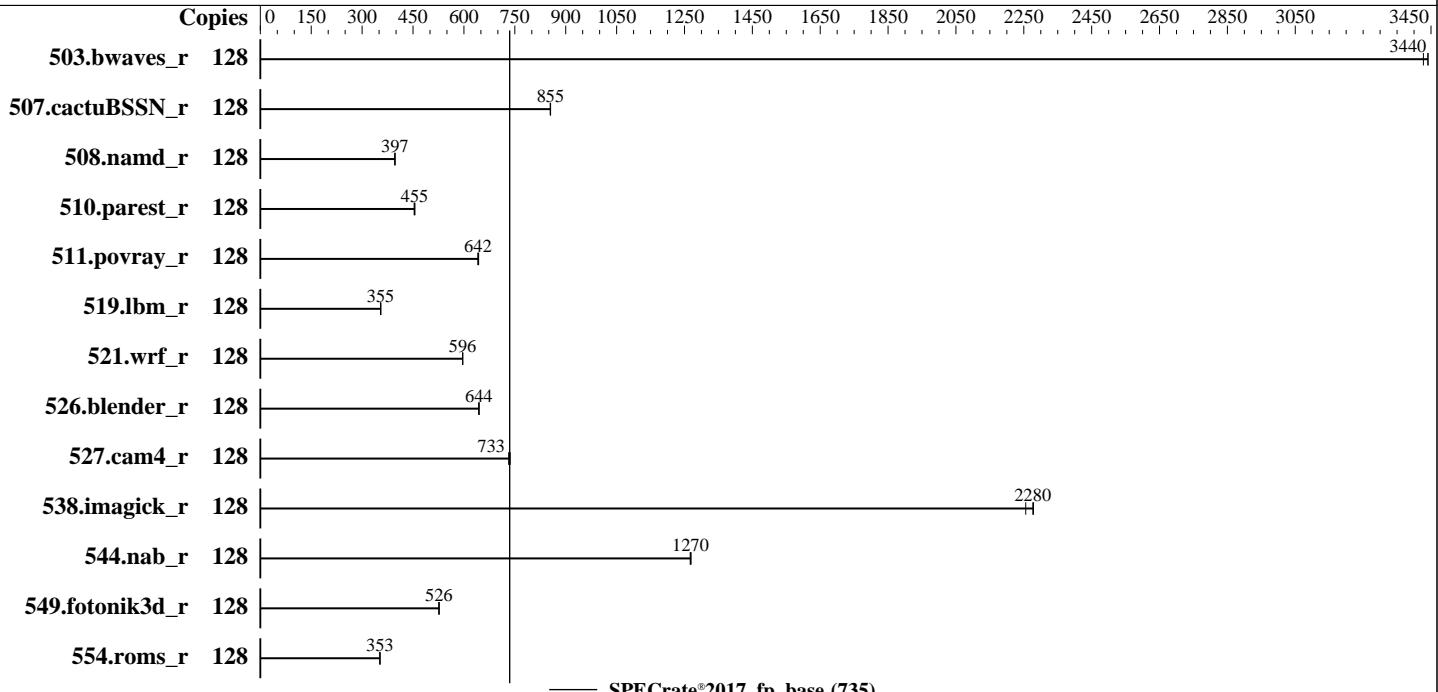

### Hardware

CPU Name: Intel Xeon Gold 6530  
Max MHz: 4000  
Nominal: 2100  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 160 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
Compiler: Kernel 5.14.21-150500.53-default  
C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	374	3430	373	3440	<b>373</b>	<b>3440</b>							
507.cactusBSSN_r	128	190	854	<b>190</b>	<b>855</b>	189	855							
508.namd_r	128	307	397	<b>307</b>	<b>397</b>	306	397							
510.parest_r	128	<b>736</b>	<b>455</b>	739	453	735	455							
511.povray_r	128	466	641	<b>466</b>	<b>642</b>	465	643							
519.lbm_r	128	380	355	381	354	<b>381</b>	<b>355</b>							
521.wrf_r	128	481	596	481	596	<b>481</b>	<b>596</b>							
526.blender_r	128	<b>303</b>	<b>644</b>	302	645	303	644							
527.cam4_r	128	306	732	<b>305</b>	<b>733</b>	304	736							
538.imagick_r	128	<b>140</b>	<b>2280</b>	140	2280	141	2260							
544.nab_r	128	<b>170</b>	<b>1270</b>	170	1270	170	1270							
549.fotonik3d_r	128	947	527	948	526	<b>947</b>	<b>526</b>							
554.roms_r	128	577	353	<b>577</b>	<b>353</b>	578	352							

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to SNC2

LLC Prefetch set to Disabled

UPI Link Disable set to Minimum Number of Links Enabled

AMP Prefetch set to Enable

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Apr  7 13:57:04 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
13:57:04 up 1 min, 1 user, load average: 0.16, 0.06, 0.02  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
root      tty1      -          13:55   39.00s  1.16s  0.01s sh
Run503-compliant-ic2024.0.2-lin-sapphirerapids-ratefp-base-smt-on-20231213.sh

-----
3. Username
From environment variable $USER: root

-----
4. ulimit -a
core file size      (blocks, -c) unlimited
data seg size        (kbytes, -d) unlimited
scheduling priority (-e) 0
file size            (blocks, -f) unlimited
pending signals      (-i) 4126880
max locked memory    (kbytes, -l) 64
max memory size     (kbytes, -m) unlimited
open files           (-n) 1024
pipe size            (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority   (-r) 0
stack size            (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes    (-u) 4126880
virtual memory        (kbytes, -v) unlimited
file locks             (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./run_SD550V3_EMR_new.sh
sh Run503-compliant-ic2024.0.2-lin-sapphirerapids-ratefp-base-smt-on-20231213.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.105/templogs/preenv.fprate.105.0.log --lognum 105.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6530
vendor_id        : GenuineIntel
cpu family       : 6
model            : 207
stepping          : 2
microcode        : 0x21000200
bugs              : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brs
cpu cores        : 32
siblings          : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6530
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 2
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
       nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
       vnumi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep
       bmi2 ertms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
       avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
       avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
       cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
       arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 320 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	160M	320M	20	Unified	3	131072	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-15,64-79

node 0 size: 257703 MB

node 0 free: 256921 MB

node 1 cpus: 16-31,80-95

node 1 size: 258039 MB

node 1 free: 257267 MB

node 2 cpus: 32-47,96-111

node 2 size: 258005 MB

node 2 free: 257350 MB

node 3 cpus: 48-63,112-127

node 3 size: 258000 MB

node 3 free: 257251 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

-----  
9. /proc/meminfo

MemTotal: 1056511700 kB

-----  
10. who -r

run-level 3 Apr 7 13:55

-----  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievfd issue-add-ssh-keys kexec-load lummask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

indirect                wickeddd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
    BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
    root=UUID=153ce07c-609f-4750-a4b2-582e7fbef5b1  
    splash=silent  
    mitigations=auto  
    quiet  
    security=apparmor

-----  
14. cpupower frequency-info  
    analyzing CPU 0:  
        Unable to determine current policy  
        boost state support:  
            Supported: yes  
            Active: yes

-----  
15. sysctl  
    kernel.numa\_balancing                1  
    kernel.randomize\_va\_space            2  
    vm.compaction\_proactiveness        20  
    vm.dirty\_background\_bytes           0  
    vm.dirty\_background\_ratio           10  
    vm.dirty\_bytes                        0  
    vm.dirty\_expire\_centisecs         3000  
    vm.dirty\_ratio                        20  
    vm.dirty\_writeback\_centisecs      500  
    vm.dirtytime\_expire\_seconds       43200  
    vm.extfrag\_threshold                500  
    vm.min\_unmapped\_ratio              1  
    vm.nr\_hugepages                      0  
    vm.nr\_hugepages\_mempolicy         0  
    vm.nr\_overcommit\_hugepages        0  
    vm.swappiness                        60  
    vm.watermark\_boost\_factor        15000  
    vm.watermark\_scale\_factor        10  
    vm.zone\_reclaim\_mode              0

-----  
16. /sys/kernel/mm/transparent\_hugepage  
    defrag                                always defer defer+madvise [madvise] never  
    enabled                                [always] madvise never  
    hugepage\_pmd\_size                2097152  
    shmem\_enabled                        always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
    alloc\_sleep\_millisecs            60000  
    defrag                                1  
    max\_ptes\_none                      511  
    max\_ptes\_shared                    256  
    max\_ptes\_swap                      64  
    pages\_to\_scan                      4096  
    scan\_sleep\_millisecs            10000

-----  
18. OS release

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

---

### 19. Disk information

```
SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   894G  48G  847G   6%  /
```

---

### 20. /sys/devices/virtual/dmi/id

```
Vendor:          Lenovo
Product:         ThinkSystem SD550V3 MB
Product Family:  ThinkSystem
Serial:          1234567890
```

---

### 21. dmidecode

```
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

#### Memory:

```
16x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4800
```

---

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Lenovo
BIOS Version:    FNE113F-2.20
BIOS Date:       01/02/2024
BIOS Revision:   2.20
Firmware Revision: 1.10
```

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
C++          | 508.namd_r(base) 510.parest_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C      | 511.povray_r(base) 526.blender_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.10 GHz, Intel Xeon Gold 6530)

SPECrate®2017\_fp\_base = 735

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-07 01:57:03-0400.

Report generated on 2024-04-24 14:35:05 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.