



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

CPU2017 License: 5416


Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

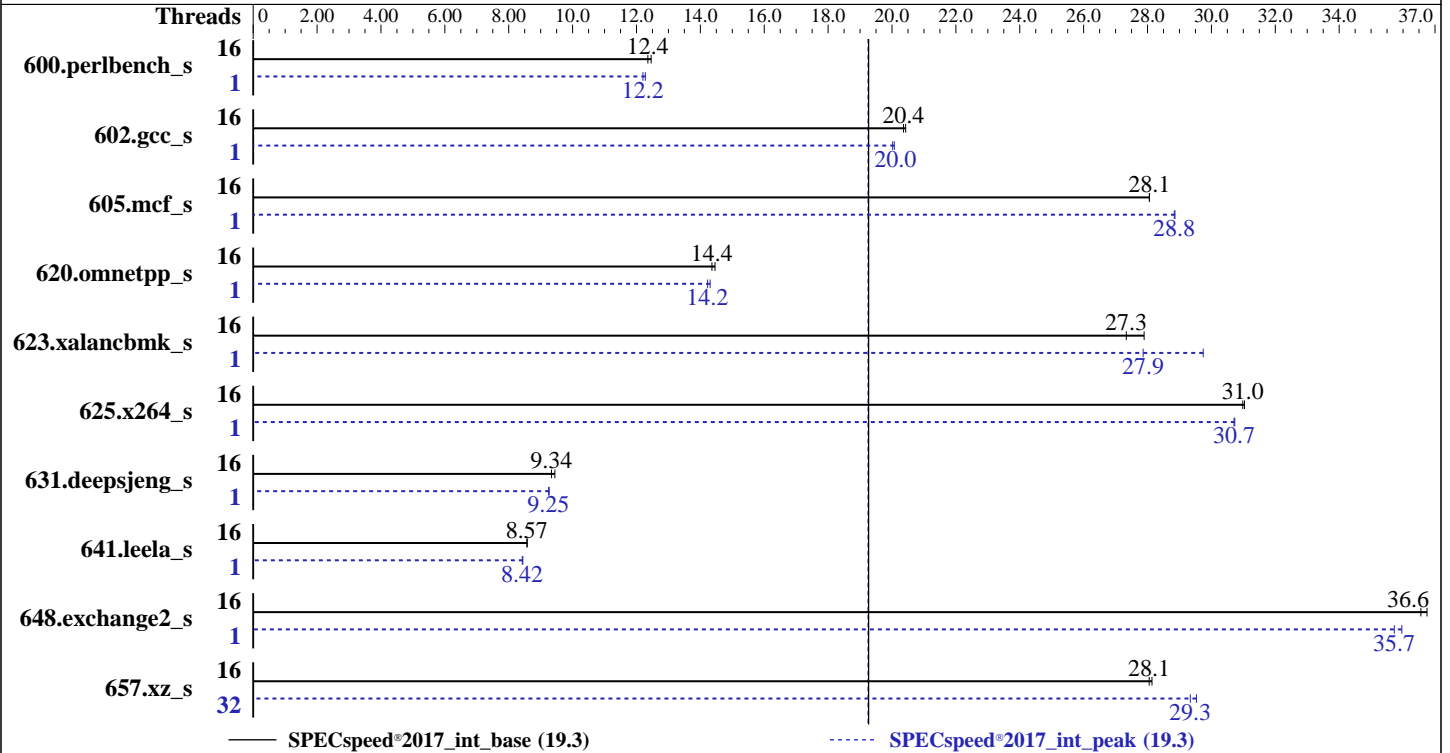

### Hardware

CPU Name: AMD EPYC 4564P  
 Max MHz: 5700  
 Nominal: 4500  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5200B-R)

Storage: 1 x 960 GB NVMe M.2  
 Other: CPU Cooling: Air

### Software

OS: Ubuntu 22.04.4 LTS  
 kernel version 5.15.0-105-generic  
 C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: BIOS version 10.14 released Feb-2024  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

CPU2017 License: 5416  
Test Sponsor: ASRock Rack Inc.  
Tested by: ASRock Rack Inc.

Test Date: Apr-2024  
Hardware Availability: Jun-2023  
Software Availability: Apr-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	142	12.5	<b>144</b>	<b>12.4</b>			1	145	12.3	<b>145</b>	<b>12.2</b>		
602.gcc_s	16	195	20.4	<b>196</b>	<b>20.4</b>			1	198	20.1	<b>199</b>	<b>20.0</b>		
605.mcf_s	16	<b>168</b>	<b>28.1</b>	168	28.1			1	<b>164</b>	<b>28.8</b>	164	28.9		
620.omnetpp_s	16	<b>114</b>	<b>14.4</b>	113	14.5			1	114	14.3	<b>115</b>	<b>14.2</b>		
623.xalancbmk_s	16	50.8	27.9	<b>51.8</b>	<b>27.3</b>			1	<b>50.9</b>	<b>27.9</b>	47.6	29.7		
625.x264_s	16	56.8	31.0	<b>56.9</b>	<b>31.0</b>			1	57.4	30.7	<b>57.4</b>	<b>30.7</b>		
631.deepsjeng_s	16	<b>153</b>	<b>9.34</b>	152	9.45			1	155	9.27	<b>155</b>	<b>9.25</b>		
641.leela_s	16	199	8.58	<b>199</b>	<b>8.57</b>			1	<b>203</b>	<b>8.42</b>	202	8.44		
648.exchange2_s	16	80.0	36.7	<b>80.4</b>	<b>36.6</b>			1	<b>82.3</b>	<b>35.7</b>	81.8	36.0		
657.xz_s	16	220	28.1	<b>220</b>	<b>28.1</b>			32	<b>211</b>	<b>29.3</b>	209	29.5		

SPECspeed®2017\_int\_base = **19.3**

SPECspeed®2017\_int\_peak = **19.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH = "/home/asrr/A1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 600.perlbench\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings :  
Precision Boost Overdrive : Enabled

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Platform Notes (Continued)

Sysinfo program /home/asrr/A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on asrr Mon Apr 22 12:32:29 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux asrr 5.15.0-105-generic #115-Ubuntu SMP Mon Apr 15 09:52:04 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
12:32:29 up 9:45, 2 users, load average: 3.30, 8.81, 14.01
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU   WHAT
asrr  tty1  -             02:47   9:41m  2.15s  0.03s  -bash
asrr  pts/1  -            02:50   9:41m  0.86s  2.08s  sudo ./asrr_run.sh
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      asrr
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            253567
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

### Platform Notes (Continued)

nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

-----  
5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
sudo ./asrr_run.sh
sudo ./asrr_run.sh
sh ./asrr_run.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 1 intspeak
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 1 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeak.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/asrr/A1

```

-----  
6. /proc/cpuinfo

```

model name      : AMD EPYC 4564P 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 97
stepping       : 2
microcode      : 0xa601206
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages
cpu cores      : 16
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      48 bits physical, 48 bits virtual
Byte Order:        Little Endian
CPU(s):            32
On-line CPU(s) list: 0-31
Vendor ID:         AuthenticAMD
Model name:        AMD EPYC 4564P 16-Core Processor
CPU family:        25
Model:             97
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s):         1
Stepping:          2
Frequency boost:   enabled

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416  
**Test Sponsor:** ASRock Rack Inc.  
**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

```

CPU max MHz:          5879.8818
CPU min MHz:          3000.0000
BogoMIPS:             9000.28
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                    lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                    rapl pni pclmulqdq monitor sse3 fma cx16 sse4_1 sse4_2 movbe popcnt
                    aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
                    sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                    perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                    hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsavec cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc arat npt lbrv
                    svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                    pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl
                    avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                    avx512_bitalg avx512_vpopcntdq rdpid overflow_recov succor smca fsrm
                    flush_l1d
Virtualization:      AMD-V
L1d cache:           512 KiB (16 instances)
L1i cache:           512 KiB (16 instances)
L2 cache:            16 MiB (16 instances)
L3 cache:            64 MiB (2 instances)
NUMA node(s):        1
NUMA node0 CPU(s):  0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability Lltf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                       filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 63505 MB
node 0 free: 62655 MB
node distances:
node 0
0: 10

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

### Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 65029364 kB

10. who -r

run-level 5 Apr 22 02:47

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmiev d i s c s i d n f t a b l e s r s y n c s e r i a l - g e t t y @ s y s t e m d - b o o t - c h e c k - n o - f a i l u r e s s y s t e m d - n e t w o r k - g e n e r a t o r s y s t e m d - s y s e x t s y s t e m d - t i m e - w a i t - s y n c u p o w e r
generated	apport openipmi
indirect	uidd
masked	cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/vmlinuz-5.15.0-105-generic  
root=UUID=d47cad3b-93a2-4ee6-9b75-5cb5f72fe94c  
ro

14. cpupower frequency-info

analyzing CPU 0:  
current policy: frequency should be within 3.00 GHz and 4.50 GHz.  
The governor "performance" may decide which speed to use within this range.  
  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 2  
Pstate-P0: 4500MHz

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

### Platform Notes (Continued)

```

vm.dirty_ratio                8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.4 LTS

```

```

-----
19. Disk information
SPEC is set to: /home/asrr/A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p4 ext4 874G 12G 818G 2% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      AsrockRack
Product:     1U4LW-B650/2L2T RPSU

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Unknown CT32G52C42U5.M16G1 32 GB 2 rank 5200
  2x Unknown Unknown

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Platform Notes (Continued)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 10.14  
BIOS Date: 02/05/2024  
BIOS Revision: 5.32

## Compiler Version Notes

-----  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

-----  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

-----  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

### C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4564P

SPECspeed®2017\_int\_base = 19.3

SPECspeed®2017\_int\_peak = 19.3

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

[http://www.spec.org/cpu2017/flags/ASRockRack\\_platform\\_amd\\_speed\\_aocc400\\_znver4\\_A.html](http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_speed_aocc400_znver4_A.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

[http://www.spec.org/cpu2017/flags/ASRockRack\\_platform\\_amd\\_speed\\_aocc400\\_znver4\\_A.xml](http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_speed_aocc400_znver4_A.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-22 08:32:29-0400.

Report generated on 2024-06-14 19:18:40 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-14.