



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro


Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

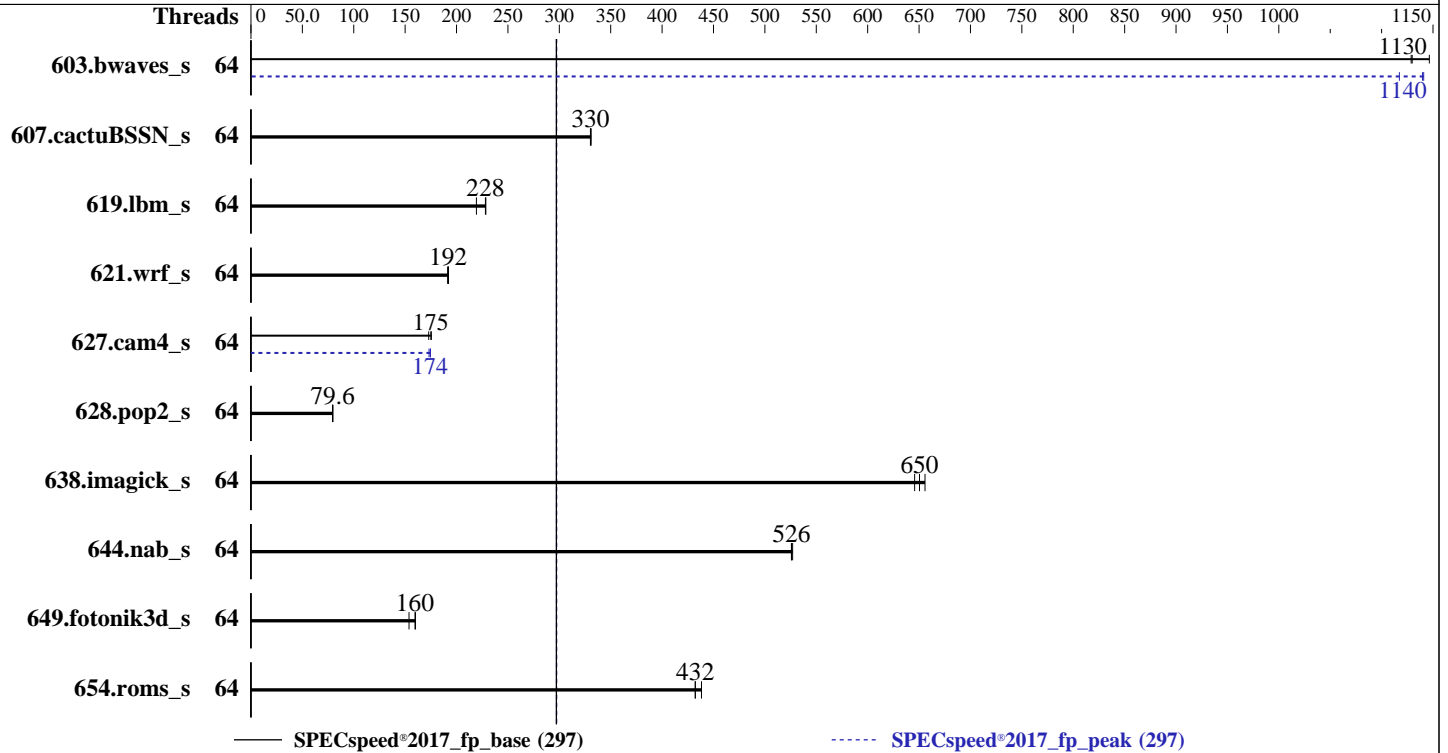

Hardware

CPU Name: Intel Xeon Gold 6530
Max MHz: 4000
Nominal: 2100
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 160 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 4 TB SATA III 7200 RPM
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
Kernel 5.14.21-150500.53-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 2.3 released May-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	52.3	1130	51.5	1150	<u>52.2</u>	<u>1130</u>	64	51.7	1140	<u>51.8</u>	<u>1140</u>	52.8	1120
607.cactuBSSN_s	64	<u>50.5</u>	<u>330</u>	50.4	331	50.5	330	64	<u>50.5</u>	<u>330</u>	50.4	331	50.5	330
619.lbm_s	64	22.9	229	23.9	219	<u>23.0</u>	<u>228</u>	64	22.9	229	23.9	219	<u>23.0</u>	<u>228</u>
621.wrf_s	64	68.8	192	<u>68.9</u>	<u>192</u>	69.1	191	64	68.8	192	<u>68.9</u>	<u>192</u>	69.1	191
627.cam4_s	64	51.3	173	<u>50.6</u>	<u>175</u>	50.5	175	64	51.2	173	50.8	175	<u>50.8</u>	<u>174</u>
628.pop2_s	64	150	79.4	<u>149</u>	<u>79.6</u>	149	79.6	64	150	79.4	<u>149</u>	<u>79.6</u>	149	79.6
638.imagick_s	64	<u>22.2</u>	<u>650</u>	22.0	656	22.3	646	64	<u>22.2</u>	<u>650</u>	22.0	656	22.3	646
644.nab_s	64	33.2	527	<u>33.2</u>	<u>526</u>	33.2	526	64	<u>33.2</u>	<u>527</u>	<u>33.2</u>	<u>526</u>	33.2	526
649.fotonik3d_s	64	56.9	160	<u>57.1</u>	<u>160</u>	59.3	154	64	56.9	160	<u>57.1</u>	<u>160</u>	59.3	154
654.roms_s	64	<u>36.4</u>	<u>432</u>	36.4	432	35.9	438	64	<u>36.4</u>	<u>432</u>	36.4	432	35.9	438

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Power Performance Tuning = BIOS Controls EPB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Platform Notes (Continued)

ENERGY_PERF_BIAS_CFG mode = Performance
DCU Streamer Prefetcher = Disable
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable
Stale AtoS = Disable
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 196-188 Sat Jun 22 09:19:55 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux 196-188 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
09:19:55 up 18:16, 1 user, load average: 5.10, 5.66, 3.58
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - Fri15 17:55m 0.81s 0.00s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```

scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4126776
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes        (-u) 4126776
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base,peak -o all --define smt-on
  --define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base,peak --output_format all
  --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
  --nopreenv --note-preenv --logfile $$SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $$SPEC/bin/sysinfo
$$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6530
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000240
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu
From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:         Little Endian

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```

CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6530
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 2
Frequency boost: enabled
CPU max MHz: 2101.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 320 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 3M 12 Data 1 64 1 64
L1i 32K 2M 8 Instruction 1 64 1 64
L2 2M 128M 16 Unified 2 2048 1 64
L3 160M 320M 20 Unified 3 131072 1 64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257678 MB
node 0 free: 229329 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 240465 MB
node 2 cpus: 32-47,96-111
node 2 size: 258039 MB
node 2 free: 240480 MB
node 3 cpus: 48-63,112-127
node 3 size: 257966 MB
node 3 free: 239456 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056486220 kB

10. who -r

run-level 3 Jun 21 15:04

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
vncserver@
indirect       wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=7dc34238-60d4-4e78-b77e-9836bd0394d3
splash=silent
mitigations=auto

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 2.10 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
  Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

```
-----
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Platform Notes (Continued)

20. Disk information

SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 3.7T 89G 3.6T 3% /

21. /sys/devices/virtual/dmi/id

Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x SK Hynix HMCG94MEBRA123N 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.3
BIOS Date: 05/14/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Compiler Version Notes (Continued)

```
-----
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

```
C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECSpeed®2017_fp_base = 297

SPECSpeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revC.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-621P-TRT
(X13DEI-T , Intel Xeon Gold 6530)

SPECspeed®2017_fp_base = 297

SPECspeed®2017_fp_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2024
Hardware Availability: Feb-2024
Software Availability: Mar-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-21 21:19:54-0400.
Report generated on 2024-07-17 11:43:30 by CPU2017 PDF formatter v6716.
Originally published on 2024-07-16.