



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573


Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

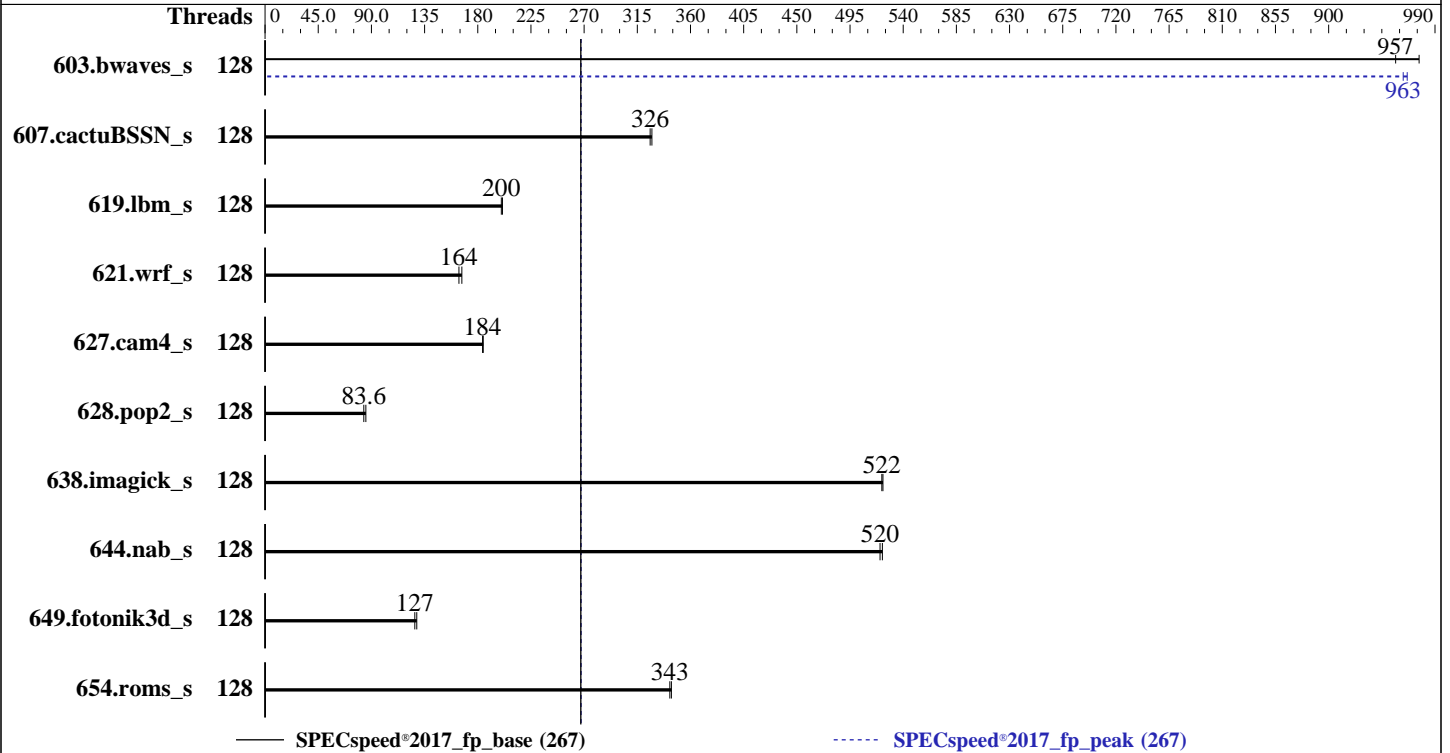

Hardware

CPU Name: Intel Xeon 6710E
 Max MHz: 3200
 Nominal: 2400
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 96 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)
 Storage: 80 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 1.0.3 released Sep-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECSpeed®2017_fp_peak = 267

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2024
Hardware Availability: Jul-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	60.4	977	<u>61.7</u>	<u>957</u>			128	61.0	966	<u>61.3</u>	<u>963</u>		
607.cactuBSSN_s	128	50.9	327	<u>51.2</u>	<u>326</u>			128	50.9	327	<u>51.2</u>	<u>326</u>		
619.lbm_s	128	26.1	201	<u>26.2</u>	<u>200</u>			128	26.1	201	<u>26.2</u>	<u>200</u>		
621.wrf_s	128	79.4	167	<u>80.6</u>	<u>164</u>			128	79.4	167	<u>80.6</u>	<u>164</u>		
627.cam4_s	128	<u>48.2</u>	<u>184</u>	48.0	185			128	<u>48.2</u>	<u>184</u>	48.0	185		
628.pop2_s	128	139	85.3	<u>142</u>	<u>83.6</u>			128	139	85.3	<u>142</u>	<u>83.6</u>		
638.imagick_s	128	27.6	523	<u>27.6</u>	<u>522</u>			128	27.6	523	<u>27.6</u>	<u>522</u>		
644.nab_s	128	33.4	522	<u>33.6</u>	<u>520</u>			128	33.4	522	<u>33.6</u>	<u>520</u>		
649.fotonik3d_s	128	<u>71.9</u>	<u>127</u>	71.0	128			128	<u>71.9</u>	<u>127</u>	71.0	128		
654.roms_s	128	45.8	344	<u>46.0</u>	<u>343</u>			128	45.8	344	<u>46.0</u>	<u>343</u>		

SPECSpeed®2017_fp_base = 267

SPECSpeed®2017_fp_peak = 267

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2024

Hardware Availability: Jul-2024

Software Availability: Jun-2024

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled

DCU Streamer Prefetcher : Enabled
MADT Core Enumeration : Linear

System Profile : Custom
CPU Power Management : Maximum Performance
Energy Efficient Turbo : Disabled
C1E : Disabled
C States : Autonomous
Energy Efficiency Policy : Performance
CPU Interconnect Bus
Link Power Management : Disabled
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on DN01113-R670 Sun Sep 22 04:33:26 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux DN01113-R670 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2024
Hardware Availability: Jul-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```
04:33:26 up 3:04, 1 user, load average: 5.08, 6.79, 4.07
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -             01:33   3:00m  1.42s  0.00s  /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126638
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126638
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42 linux
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=128 --tune base,peak -o all --define smt-on --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=128 --tune base,peak --output_format all --define smt-on --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size refspped fpspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templots/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6710E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
stepping      : 3
microcode    : 0x3000211
bugs         : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores    : 64
siblings     : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630,632,634,636,638
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
Model name:             Intel(R) Xeon(R) 6710E
BIOS Model name:       Intel(R) Xeon(R) 6710E CPU @ 2.4GHz
BIOS CPU family:       179
CPU family:            6
Model:                 175
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):              2
Stepping:               3
BogoMIPS:               4800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bml1 avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize pconfig arch_lbr ibt flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:              4 MiB (128 instances)
L1i cache:              8 MiB (128 instances)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2024
Hardware Availability: Jul-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

L2 cache: 128 MiB (32 instances)
L3 cache: 192 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-63
NUMA node1 CPU(s): 64-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	64K	8M	8	Instruction	1	128	1	64
L2	4M	128M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-63
node 0 size: 515683 MB
node 0 free: 504391 MB
node 1 cpus: 64-127
node 1 size: 516002 MB
node 1 free: 508948 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

9. /proc/meminfo

MemTotal: 1056446560 kB

10. who -r

run-level 3 Sep 22 01:30

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```

enabled-runtime  irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
disabled         nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                 wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
                 systemd-remount-fs
indirect         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                 chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
                 gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
                 multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
                 snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
                 systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
                 systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=ab78c1eb-763f-4bbd-bae6-2e79c83e47d6
linux
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 27:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2024

Hardware Availability: Jul-2024

Software Availability: Jun-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

```

Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 11G 70G 14% /mnt/ramdisk

```

20. /sys/devices/virtual/dmi/id

```

Vendor: Dell Inc.
Product: PowerEdge R670
Product Family: PowerEdge
Serial: DN01113

```

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

9x 00AD042300AD HMC94AHBRA480N 64 GB 2 rank 6400, configured at 5600
7x 00AD063200AD HMC94AHBRA277N 64 GB 2 rank 6400, configured at 5600

```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: Dell Inc.
BIOS Version: 1.0.3
BIOS Date: 09/02/2024
BIOS Revision: 1.0

```

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2024
Hardware Availability: Jul-2024
Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2024

Hardware Availability: Jul-2024

Software Availability: Jun-2024

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2024

Hardware Availability: Jul-2024

Software Availability: Jun-2024

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 267

PowerEdge R670 (Intel Xeon 6710E)

SPECspeed®2017_fp_peak = 267

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2024

Hardware Availability: Jul-2024

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-22 04:33:25-0400.

Report generated on 2024-10-09 14:01:54 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.