



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

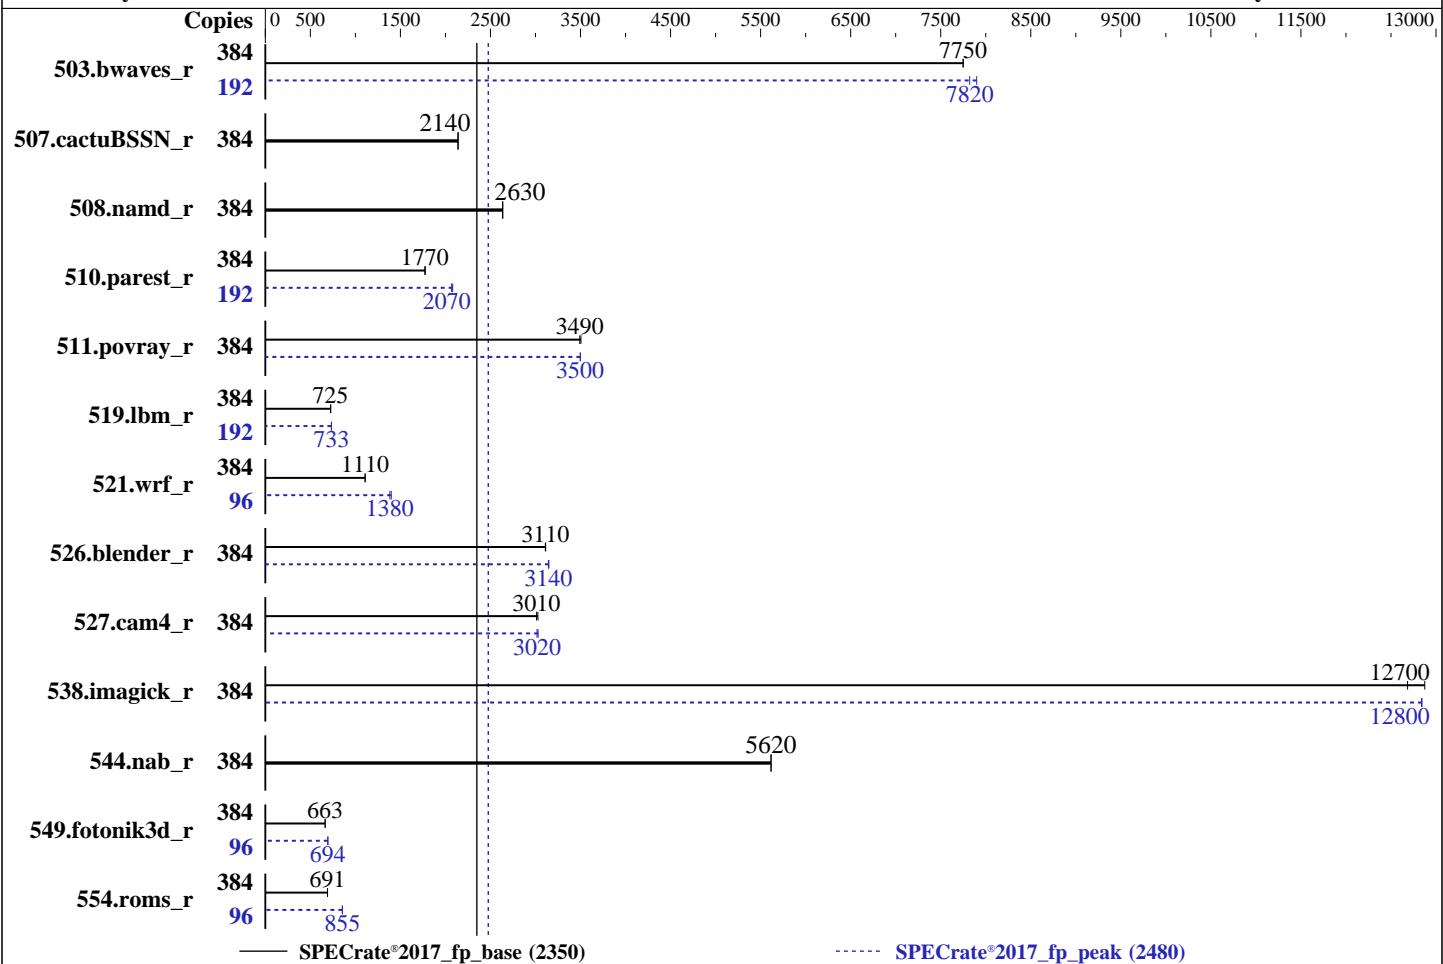

— SPECrate®2017_fp_base (2350)

- - - - - SPECrate®2017_fp_peak (2480)

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 384 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores
 Other: None
 Memory: 2304 GB (24 x 96 GB 2Rx4 PC5-6400B-R, running at 6000)
 Storage: 180 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
 Compiler: 6.8.0-44-generic
 C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 0.2.6 [X-REV] released Sep-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECCrate®2017_fp_base = 2350

SPECCrate®2017_fp_peak = 2480

CPU2017 License: 6573

Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	497	7750	497	7750			192	246	7820	244	7900		
507.cactuBSSN_r	384	227	2140	227	2140			384	227	2140	227	2140		
508.namd_r	384	138	2640	138	2630			384	138	2640	138	2630		
510.parest_r	384	567	1770	565	1780			192	241	2080	243	2070		
511.povray_r	384	256	3510	257	3490			384	256	3500	256	3500		
519.lbm_r	384	558	725	558	726			192	275	735	276	733		
521.wrf_r	384	776	1110	776	1110			96	155	1380	154	1400		
526.blender_r	384	188	3110	188	3110			384	186	3150	186	3140		
527.cam4_r	384	223	3010	222	3030			384	222	3030	223	3020		
538.imagick_r	384	74.2	12900	75.3	12700			384	74.4	12800	74.4	12800		
544.nab_r	384	115	5620	115	5620			384	115	5620	115	5620		
549.fotonik3d_r	384	2250	665	2256	663			96	539	694	539	694		
554.roms_r	384	883	691	883	691			96	178	855	178	856		

SPECCrate®2017_fp_base = 2350

SPECCrate®2017_fp_peak = 2480

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

CPU2017 License: 6573

Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Oct-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1
    .1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 180 GB ramdisk created with the cmd: "mount -t tmpfs -o size=180G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

 DRAM Refresh Delay : Performance

 DIMM Self Healing on -

 Uncorrectable Memory Error : Disabled

 Logical Processor : Disabled

 Virtualization Technology : Disabled

 NUMA Nodes per Socket : 4

 System Profile : Custom

 C-States : Disabled

 Memory Patrol Scrub : Disabled

 PCI ASPM L1 Link -

 Power Management : Disabled

 Determinism Control : Manual

 Optimizer Mode : Enabled

 Determinism Slider : Power Determinism

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on CSN2604-R7725 Sat Sep 21 15:33:48 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

CPU2017 License: 6573

Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Oct-2024

Platform Notes (Continued)

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux CSN2604-R7725 6.8.0-44-generic #44-Ubuntu SMP PREEMPT_DYNAMIC Tue Aug 13 13:35:26 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
15:33:48 up 2 min, 1 user, load average: 0.50, 0.18, 0.06
USER     TTY      FROM          LOGIN@    IDLE      JCPU      PCPU WHAT
root     tty1     -           15:32    23.00s   1.49s   0.44s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)        unlimited
file(blocks)         unlimited
data(kbytes)         unlimited
stack(kbytes)        unlimited
coredump(blocks)     0
memory(kbytes)       unlimited
locked memory(kbytes) 2097152
process              9285234
nofiles              1024
vmmemory(kbytes)     unlimited
locks                unlimited
rtprio               0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define
  DL-BIOS-adddcD=1 --define DL-VERS=5.3.7 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-BIOS-NPS=4
  --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.7 --output_format
  html,pdf,txt fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
  DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.7
  --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size test:train:refrate fprate
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1
```

```
-----  
6. /proc/cpuinfo  
  model name      : AMD EPYC 9965 192-Core Processor  
  vendor_id       : AuthenticAMD  
  cpu family     : 26  
  model          : 17  
  stepping        : 0  
  microcode       : 0xb101021  
  bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
  TLB size        : 192 4K pages  
  cpu cores       : 192  
  siblings         : 192  
  2 physical ids (chips)  
  384 processors (hardware threads)  
  physical id 0: core ids 0-191  
  physical id 1: core ids 0-191  
  physical id 0: apicids 0-191  
  physical id 1: apicids 256-447  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:  
  Architecture:           x86_64  
  CPU op-mode(s):        32-bit, 64-bit  
  Address sizes:         52 bits physical, 57 bits virtual  
  Byte Order:            Little Endian  
  CPU(s):                384  
  On-line CPU(s) list:   0-383  
  Vendor ID:             AuthenticAMD  
  BIOS Vendor ID:       AMD  
  Model name:            AMD EPYC 9965 192-Core Processor  
  BIOS Model name:      AMD EPYC 9965 192-Core Processor  
  BIOS CPU family:      107  
  CPU family:            26  
  Model:                 17  
  Thread(s) per core:    1  
  Core(s) per socket:    192  
  Socket(s):             2  
  Stepping:
```

CPU @ 2.2GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

CPU2017 License: 6573

Test Date: Sep-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Oct-2024

Platform Notes (Continued)

Frequency boost:

enabled

CPU(s) scaling MHz:

61%

CPU max MHz:

3700.1951

CPU min MHz:

1500.0000

BogoMIPS:

4493.47

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmix fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apcid aperfmpfperf rapl pnpi pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
smep bmi2 erms invpcid cqmp rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmp_llc cqmp_occur_llc cqmp_mbm_total
cqmp_mbm_local user_shstk avx_vnni avx512_bf16 clzero iperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

L1d cache:

18 MiB (384 instances)

L1i cache:

12 MiB (384 instances)

L2 cache:

384 MiB (384 instances)

L3 cache:

768 MiB (24 instances)

NUMA node(s):

8

NUMA node0 CPU(s):

0-47

NUMA node1 CPU(s):

48-95

NUMA node2 CPU(s):

96-143

NUMA node3 CPU(s):

144-191

NUMA node4 CPU(s):

192-239

NUMA node5 CPU(s):

240-287

NUMA node6 CPU(s):

288-335

NUMA node7 CPU(s):

336-383

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Lltf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-47
node 0 size: 289511 MB
node 0 free: 288249 MB
node 1 cpus: 48-95
node 1 size: 290281 MB
node 1 free: 289606 MB
node 2 cpus: 96-143
node 2 size: 290238 MB
node 2 free: 285438 MB
node 3 cpus: 144-191
node 3 size: 290265 MB
node 3 free: 289726 MB
node 4 cpus: 192-239
node 4 size: 290281 MB
node 4 free: 289694 MB
node 5 cpus: 240-287
node 5 size: 290281 MB
node 5 free: 289711 MB
node 6 cpus: 288-335
node 6 size: 290281 MB
node 6 free: 289728 MB
node 7 cpus: 336-383
node 7 size: 290238 MB
node 7 free: 289637 MB
node distances:
node   0   1   2   3   4   5   6   7
 0: 10  12  12  12  32  32  32  32
 1: 12  10  12  12  32  32  32  32
 2: 12  12  10  12  32  32  32  32
 3: 12  12  12  10  32  32  32  32
 4: 32  32  32  32  10  12  12  12
 5: 32  32  32  32  12  10  12  12
 6: 32  32  32  32  12  12  10  12
 7: 32  32  32  32  12  12  12  10
```

```
9. /proc/meminfo
MemTotal:      2377092524 kB
```

```
10. who -r
run-level 3 Sep 21 15:31
```

```
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
Default Target      Status
multi-user          running
```

```
12. Services, from systemctl list-unit-files
STATE           UNIT FILES
enabled         ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
                networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
systemd-timesyncd thermald tuned ua-reboot-cmcs ubuntu-advantage udisks2 ufw vgaauth
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confcontext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-6.8.0-44-generic  
root=UUID=8458ae54-58cc-4621-9289-b1d743fde503  
ro
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 195:  
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
boost state support:  
    Supported: yes  
    Active: yes  
    Boost States: 0  
    Total States: 3  
    Pstate-P0: 38800MHz
```

```
-----  
15. tuned-adm active  
Current active profile: latency-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       0  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      3  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   1  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode            1
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           [always] defer defer+madvise madvise never
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
enabled          [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs 60000  
defrag                1  
max_ptes_none         511  
max_ptes_shared       256  
max_ptes_swap         64  
pages_to_scan         4096  
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release Ubuntu 24.04 LTS
```

```
-----  
20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
tmpfs          tmpfs  180G  3.3G  177G   2% /mnt/ramdisk
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:        Dell Inc.  
Product:       PowerEdge R7725  
Product Family: PowerEdge  
Serial:        CSN2604
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
24x 80CE000080CE M321RYGA0PB2-CCPKC 96 GB 2 rank 6400, configured at 6000
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:    Dell Inc.  
BIOS Version:   0.2.6 [X-REV]  
BIOS Date:      09/20/2024  
BIOS Revision:  0.2
```

Compiler Version Notes

```
=====  
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc  
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdaloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdaloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdaloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdaloc -lflang -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fsto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdaloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdaloc -ldl -lflang
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdaloc -ldl -lflang
```

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lslr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm  
-lamdalloc -ldl
```

526.blender_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_fp_base = 2350

SPECrate®2017_fp_peak = 2480

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-21 11:33:47-0400.

Report generated on 2024-10-10 21:07:26 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.