



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

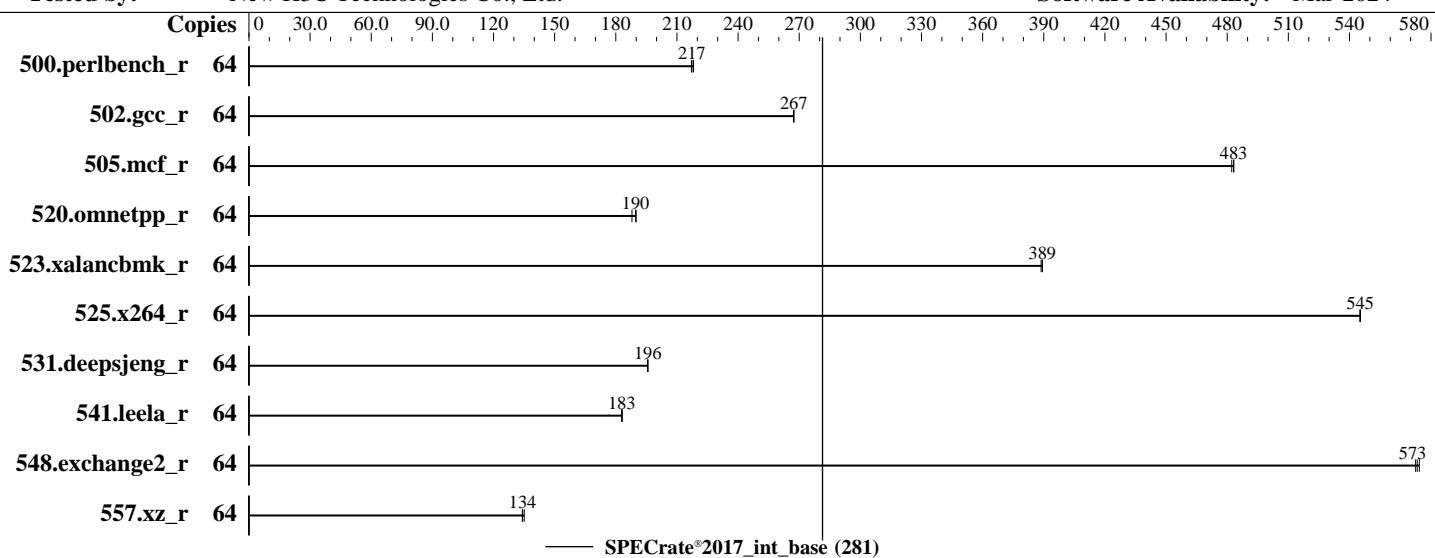

### Hardware

CPU Name: Intel Xeon Gold 5416S  
 Max MHz: 4000  
 Nominal: 2000  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 4400)  
 Storage: 1 x 6.4 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 6.10.45 released Aug-2024 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	<b>469</b>	<b>217</b>	467	218	469	217							
502.gcc_r	64	339	267	339	267	<b>339</b>	<b>267</b>							
505.mcf_r	64	<b>214</b>	<b>483</b>	214	483	214	482							
520.omnetpp_r	64	<b>443</b>	<b>190</b>	442	190	447	188							
523.xalancbmk_r	64	174	389	174	389	<b>174</b>	<b>389</b>							
525.x264_r	64	206	545	206	545	<b>206</b>	<b>545</b>							
531.deepsjeng_r	64	375	196	<b>375</b>	<b>196</b>	375	196							
541.leela_r	64	579	183	579	183	<b>579</b>	<b>183</b>							
548.exchange2_r	64	292	574	293	572	<b>293</b>	<b>573</b>							
557.xz_r	64	515	134	512	135	<b>515</b>	<b>134</b>							

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

## Platform Notes

### BIOS Settings:

SNC = Enable SNC2 (2-clusters)  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance

```
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Sep 20 06:09:21 2024
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/1p)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
06:09:21 up 6:30, 2 users, load average: 0.00, 2.52, 22.64
USER   TTY      FROM             LOGIN@    IDLE    JCPU    PCPU WHAT
root   pts/0    172.16.27.225  23:39    57.00s  0.23s  0.23s -bash
root   pts/0    172.16.27.225  23:41    16.00s  0.97s  0.01s sh intrate.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Platform Notes (Continued)

```
file size          (blocks, -f) unlimited
pending signals   (-i) 4124956
max locked memory (kbytes, -l) 64
max memory size   (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size          (kbytes, -s) unlimited
cpu time            (seconds, -t) unlimited
max user processes (-u) 4124956
virtual memory      (kbytes, -v) unlimited
file locks          (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
sh intrate.sh  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c  
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile  
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/speccpu
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Gold 5416S  
vendor_id        : GenuineIntel  
cpu family       : 6  
model           : 143  
stepping         : 8  
microcode        : 0x2b000571  
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
cpu cores        : 16  
siblings          : 32  
2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-15  
physical id 1: core ids 0-15  
physical id 0: apicids 0-31  
physical id 1: apicids 128-159  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:  
Architecture:          x86_64  
CPU op-mode(s):       32-bit, 64-bit  
Address sizes:        52 bits physical, 57 bits virtual  
Byte Order:           Little Endian  
CPU(s):               64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

## Platform Notes (Continued)

On-line CPU(s) list:

0-63

Vendor ID:

GenuineIntel

Model name:

Intel(R) Xeon(R) Gold 5416S

CPU family:

6

Model:

143

Thread(s) per core:

2

Core(s) per socket:

16

Socket(s):

2

Stepping:

8

CPU max MHz:

4000.0000

CPU min MHz:

800.0000

BogoMIPS:

4000.00

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm nonstop_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
nonstop_tsc cpuid aperfmpfper tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnumi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erts invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip
pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitagonal tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote
movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
avx512_fp16 amx_tile flush_lld arch_capabilities
```

Virtualization:

VT-x

L1d cache:

1.5 MiB (32 instances)

L1i cache:

1 MiB (32 instances)

L2 cache:

64 MiB (32 instances)

L3 cache:

60 MiB (2 instances)

NUMA node(s):

4

NUMA node0 CPU(s):

0-7,32-39

NUMA node1 CPU(s):

8-15,40-47

NUMA node2 CPU(s):

16-23,48-55

NUMA node3 CPU(s):

24-31,56-63

Vulnerability Itlb multihit:

Not affected

Vulnerability Lltf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 257563 MB
node 0 free: 251593 MB
node 1 cpus: 8-15,40-47
node 1 size: 258043 MB
node 1 free: 253871 MB
node 2 cpus: 16-23,48-55
node 2 size: 258043 MB
node 2 free: 253840 MB
node 3 cpus: 24-31,56-63
node 3 size: 257618 MB
node 3 free: 252352 MB
node distances:
node 0 1 2 3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12
 3: 21 21 12 10
```

```
9. /proc/meminfo
MemTotal: 1056020708 kB
```

```
10. who -r
run-level 3 Sep 19 23:39
```

```
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings
                kdump kdump-early klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels
                rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny wpa_supplicant
                systemd-remount-fs
disabled       NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
                ebttables exchange-bmc-os-info gpm grub2-once haveged-hwswitch-root ipmi ipmievd
                irqbindall issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs
                nfs-blkmap nmb nvmef-autocnnect openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd
                rtkit-daemon serial-getty@ set_kthreadd_prio smartd_generate_opts smb snmpd snmptrapd
                speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower
                vncserver@ wpa_supplicant@
indirect       pscsd saned@ wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Platform Notes (Continued)

```
root=UUID=a88cec4e-8c93-48e1-b1c1-5874d40c9a64
splash=silent
resume=/dev/disk/by-uuid/88c758ac-d10b-493d-b755-89620eeac1b1
mitigations=auto
quiet
security=apparmor
crashkernel=404M,high
crashkernel=72M,low
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 4.00 GHz.  
                The governor "performance" may decide which speed to use  
                within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          0  
kernel.randomize_va_space      2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes     0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                20  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages               0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages   0  
vm.swappiness                 10  
vm.watermark_boost_factor    15000  
vm.watermark_scale_factor     10  
vm.zone_reclaim_mode          0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag                  1  
max_ptes_none            511  
max_ptes_shared          256  
max_ptes_swap             64  
pages_to_scan            4096
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Platform Notes (Continued)

scan\_sleep\_millisecs 10000

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

20. Disk information  
SPEC is set to: /home/speccpu  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs 4.8T 93G 4.8T 2% /home

21. /sys/devices/virtual/dmi/id  
Vendor: New H3C Technologies Co., Ltd.  
Product: H3C UniServer R4700 G6  
Product Family: Rack  
Serial: 210235A4FYH242000015

22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
2x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 4400  
14x Hynix HMCG94AHBRA487N 64 GB 2 rank 6400, configured at 4400

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 6.10.45  
BIOS Date: 08/23/2024  
BIOS Revision: 5.32

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Gold 5416S)

SPECrate®2017\_int\_base = 281

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-19 18:09:21-0400.

Report generated on 2024-10-09 14:03:46 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.