



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

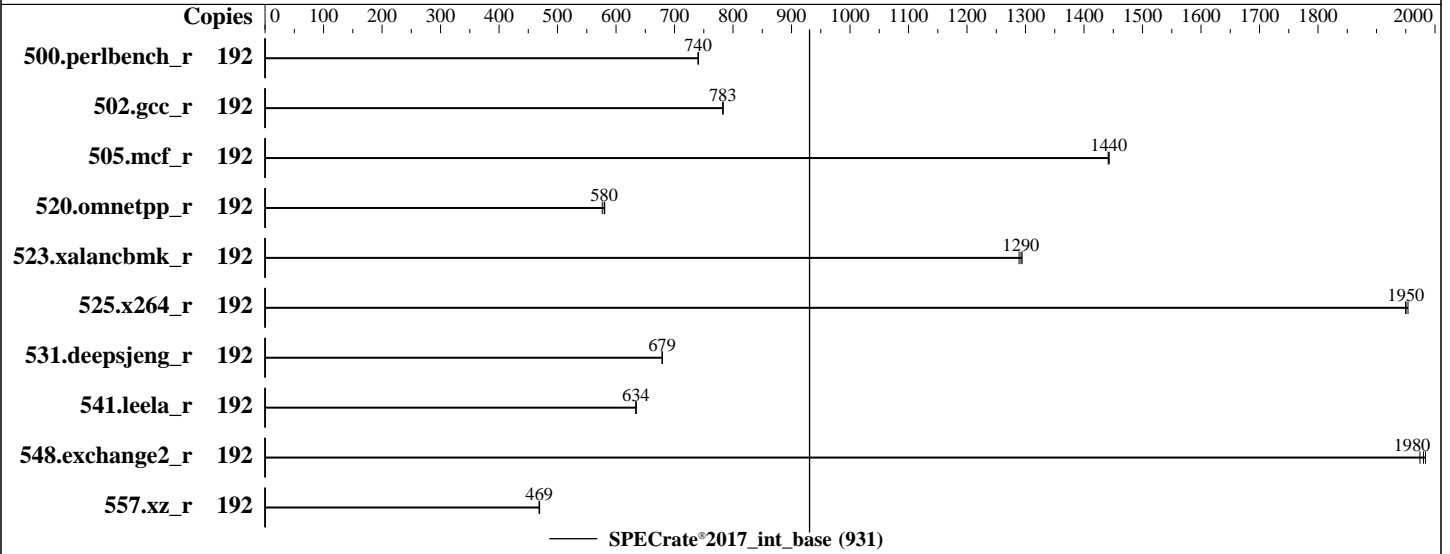

Hardware

CPU Name: Intel Xeon Platinum 8558P
 Max MHz: 4000
 Nominal: 2700
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 260 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 1 x 3.2 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 6.10.43 released Jul-2024 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	413	740	413	741	413	740							
502.gcc_r	192	347	783	347	783	347	783							
505.mcf_r	192	215	1440	215	1440	215	1440							
520.omnetpp_r	192	435	580	434	581	437	576							
523.xalancbmk_r	192	157	1290	157	1290	157	1290							
525.x264_r	192	172	1950	172	1950	172	1950							
531.deepsjeng_r	192	324	679	324	679	324	679							
541.leela_r	192	501	635	501	634	502	634							
548.exchange2_r	192	254	1980	254	1980	255	1970							
557.xz_r	192	442	469	442	469	443	468							

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/specpunew/lib/intel64:/home/specpunew/lib/ia32:/home/specpunew/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes

BIOS Settings:

SNC = Enable SNC2 (2-clusters)
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance

Sysinfo program /home/specpunew/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Sep 11 22:53:03 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
22:53:03 up 3 min, 1 user, load average: 0.30, 0.26, 0.11
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU WHAT
root      tty1     -             22:52       7.00s      1.49s      0.01s sh intrate.sh

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 931

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Sep-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

```

pending signals                (-i) 4126465
max locked memory              (kbytes, -l) 64
max memory size                 (kbytes, -m) unlimited
open files                      (-n) 1024
pipe size                       (512 bytes, -p) 8
POSIX message queues           (bytes, -q) 819200
real-time priority              (-r) 0
stack size                      (kbytes, -s) unlimited
cpu time                        (seconds, -t) unlimited
max user processes              (-u) 4126465
virtual memory                  (kbytes, -v) unlimited
file locks                      (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh intrate.sh
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2024.1-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runccpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2024.1-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/specpcunew

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8558P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 48
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

Vendor ID:                GenuineIntel
Model name:               INTEL(R) XEON(R) PLATINUM 8558P
CPU family:               6
Model:                    207
Thread(s) per core:      2
Core(s) per socket:      48
Socket(s):                2
Stepping:                 2
CPU max MHz:              4000.0000
CPU min MHz:              800.0000
BogoMIPS:                 5400.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                          nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                          ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                          sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                          invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                          vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                          bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                          xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                          hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                          avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                          avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                          enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                          amx_tile flush_lld arch_capabilities

Virtualization:           VT-x
L1d cache:                4.5 MiB (96 instances)
L1i cache:                3 MiB (96 instances)
L2 cache:                 192 MiB (96 instances)
L3 cache:                 520 MiB (2 instances)
NUMA node(s):             4
NUMA node0 CPU(s):        0-23,96-119
NUMA node1 CPU(s):        24-47,120-143
NUMA node2 CPU(s):        48-71,144-167
NUMA node3 CPU(s):        72-95,168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                          sequence
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL   SETS PHY-LINE COHERENCY-SIZE
L1d   48K      4.5M   12 Data          1       64      1           64
L1i   32K       3M     8 Instruction    1       64      1           64
L2    2M       192M   16 Unified       2      2048    1           64
L3   260M      520M   20 Unified       3  212992    1           64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 257611 MB
node 0 free: 256779 MB
node 1 cpus: 24-47,120-143
node 1 size: 258001 MB
node 1 free: 256719 MB
node 2 cpus: 48-71,144-167
node 2 size: 258035 MB
node 2 free: 257175 MB
node 3 cpus: 72-95,168-191
node 3 size: 257996 MB
node 3 free: 257253 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056405680 kB

10. who -r

run-level 3 Sep 11 22:50

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor cron display-manager getty@ issue-generator
           kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections purge-kernels rollback rsyslog
           smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled        auditd autofs autovast-initscripts blk-availability boot-sysctl ca-certificates
                 chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
                 exchange-bmc-os-info fancontrol firewalld gpm grub2-once haveged haveged-switch-root ipmi
                 ipmievd irqbalance issue-add-ssh-keys kdump kdump-early kexec-load lm_sensors lunmask
                 man-db-create multipathd ndctl-monitor nfs nfs-blkmap nmb nvmmf-autoconnect postfix rpcbind
                 rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd sysstat
                 systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                 systemd-time-wait-sync systemd-timesyncd tuned vncserver@
indirect     pcsd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=befabla9-6492-412a-9d0b-079466ad03eb
splash=silent
resume=/dev/disk/by-uuid/64b85326-8619-4fcb-8127-1e8683bd7471
mitigations=auto
quiet

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```
splash=silent
mitigations=auto
```

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 4.00 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

20. Disk information

SPEC is set to: /home/speccpunew

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p5	xf	522G	347G	176G	67%	/home

21. /sys/devices/virtual/dmi/id

Vendor: New H3C Technologies Co., Ltd.
 Product: H3C UniServer R4900 G6
 Product Family: Rack
 Serial: 210235A4HEH242000015

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMCG94AGBRA181N 64 GB 2 rank 5600

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
 BIOS Version: 6.10.43
 BIOS Date: 07/27/2024
 BIOS Revision: 5.32

Compiler Version Notes

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4900 G6 (Intel Xeon Platinum 8558P)

SPECrate®2017_int_base = 931

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-11 10:53:02-0400.

Report generated on 2024-10-09 14:04:16 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.