



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

SPECSpeed®2017_int_base = 16.0

SPECSpeed®2017_int_peak = 16.2

CPU2017 License: 6488


Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2022

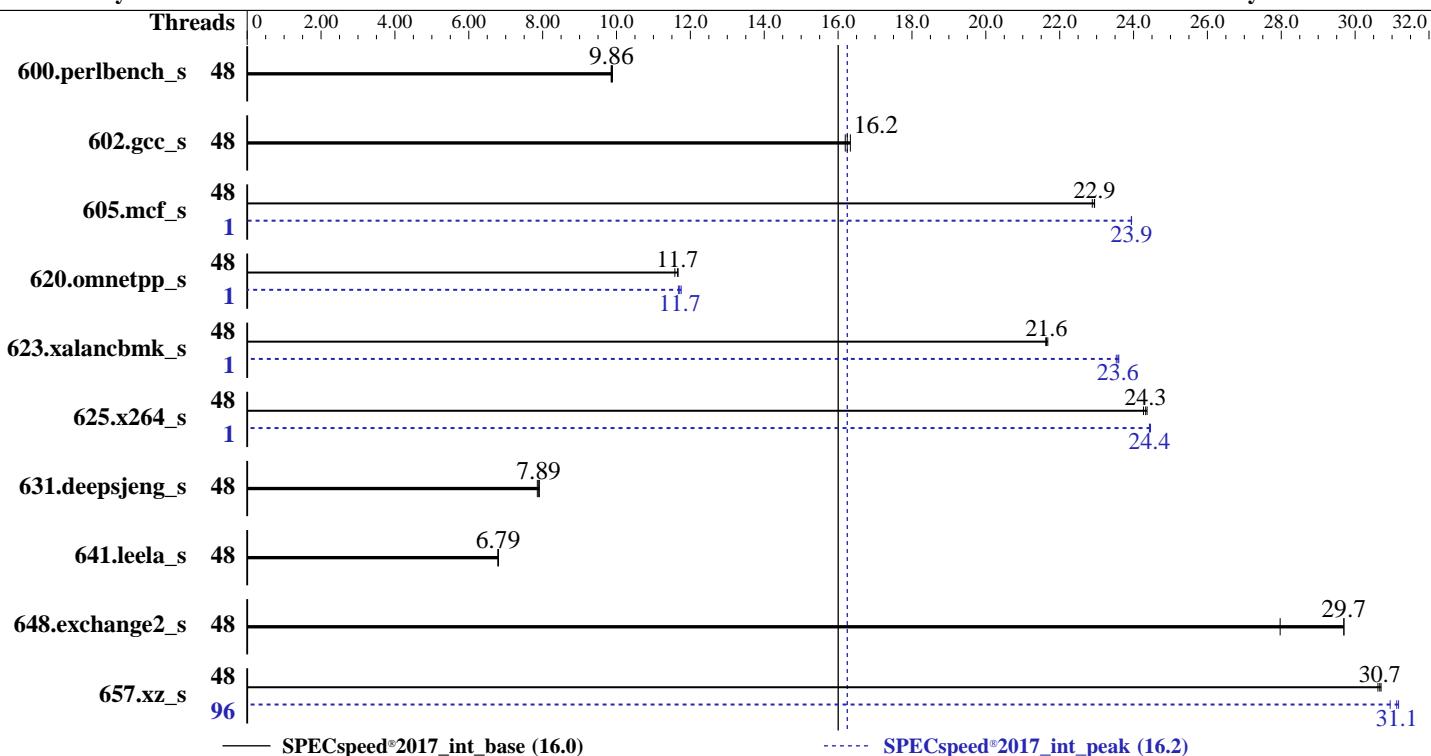

Hardware		Software	
CPU Name:	AMD EPYC 9274F	OS:	Red Hat Enterprise Linux release 9.0 (Plow)
Max MHz:	4300		5.14.0-70.13.1.el9_0.x86_64
Nominal:	4050	Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	48 cores, 2 chips, 2 threads/core	Parallel:	Yes
Orderable:	1,2 chips	Firmware:	Version 2.09.26 released Aug-2024
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 3 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)	Other:	None
Storage:	1 x 480 GB SATA SSD	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage
Other:	CPU Cooling: Air		



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	<u>180</u>	<u>9.86</u>	180	9.86	179	9.89	48	<u>180</u>	<u>9.86</u>	180	9.86	179	9.89
602.gcc_s	48	<u>245</u>	<u>16.2</u>	246	16.2	244	16.3	48	<u>245</u>	<u>16.2</u>	246	16.2	244	16.3
605.mcf_s	48	<u>206</u>	<u>22.9</u>	206	22.9	206	22.9	1	<u>197</u>	<u>23.9</u>	<u>197</u>	<u>23.9</u>	197	23.9
620.omnetpp_s	48	<u>140</u>	<u>11.7</u>	141	11.6	140	11.7	1	<u>140</u>	<u>11.7</u>	<u>139</u>	<u>11.7</u>	139	11.8
623.xalancbmk_s	48	65.5	21.6	65.4	21.7	<u>65.5</u>	<u>21.6</u>	1	60.0	23.6	60.2	23.5	<u>60.1</u>	<u>23.6</u>
625.x264_s	48	<u>72.5</u>	<u>24.3</u>	72.7	24.3	72.4	24.4	1	<u>72.2</u>	<u>24.4</u>	72.1	24.5	72.2	24.4
631.deepsjeng_s	48	181	7.91	<u>182</u>	<u>7.89</u>	182	7.86	48	181	7.91	<u>182</u>	<u>7.89</u>	182	7.86
641.leela_s	48	<u>251</u>	<u>6.79</u>	251	6.79	251	6.80	48	<u>251</u>	<u>6.79</u>	251	6.79	251	6.80
648.exchange2_s	48	99.0	29.7	<u>99.0</u>	<u>29.7</u>	105	28.0	48	99.0	29.7	<u>99.0</u>	<u>29.7</u>	105	28.0
657.xz_s	48	202	30.6	201	30.7	<u>202</u>	<u>30.7</u>	96	<u>199</u>	<u>31.1</u>	198	31.2	200	30.9

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-95"  
LD_LIBRARY_PATH = "/cpu2017/amd_speed_aocc400_znver4_A/lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "96"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

```
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 400  
PPT Control = Manual  
PPT = 400  
NUMA Nodes Per Socket = NPS4
```

```
Sysinfo program /cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Sep 30 02:27:59 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----  
1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 250 (250-6.el9_0)  
12. Services, from systemctl list-unit-files  
13. Linux kernel boot-time arguments, from /proc/cmdline  
14. cpupower frequency-info  
15. tuned-adm active  
16. sysctl  
17. /sys/kernel/mm/transparent_hugepage  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS  
-----
```

```
-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64  
x86_64 x86_64 GNU/Linux  
-----
```

```
2. w  
02:27:59 up 5 min, 2 users, load average: 0.04, 0.20, 0.12  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 02:23 4:47 0.00s 0.00s -bash  
root pts/0 02:23 31.00s 0.84s 0.00s -bash  
-----
```

```
3. Username  
From environment variable $USER: root  
-----
```

```
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 6191057  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 6191057  
virtual memory (kbytes, -v) unlimited  
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Platform Notes (Continued)

file locks (-x) unlimited

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 18  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
python3 ./run_amd_speed_aocc400_znver4_A1.py  
/bin/bash ./amd_speed_aocc400_znver4_A1.sh  
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed  
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.028/templogs/preenv.intspeed.028.0.log --lognum 028.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /cpu2017
```

```
-----  
6. /proc/cpuinfo  
model name : AMD EPYC 9274F 24-Core Processor  
vendor_id : AuthenticAMD  
cpu family : 25  
model : 17  
stepping : 1  
microcode : 0xa101148  
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size : 3584 4K pages  
cpu cores : 24  
siblings : 48  
2 physical ids (chips)  
96 processors (hardware threads)  
physical id 0: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58  
physical id 1: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58  
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117  
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213,224-229,240-245  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.37.4:  
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 52 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 96  
On-line CPU(s) list: 0-95  
Vendor ID: AuthenticAMD  
BIOS Vendor ID: Advanced Micro Devices, Inc.  
Model name: AMD EPYC 9274F 24-Core Processor  
BIOS Model name: AMD EPYC 9274F 24-Core Processor  
CPU family: 25  
Model: 17  
Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 2  
Stepping: 1  
Frequency boost: enabled
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```

CPU max MHz: 4303.1250
CPU min MHz: 1500.0000
BogoMIPS: 8088.26
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
       constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
       pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
       popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
       abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
       perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
       invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil
       avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
       xsaves xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
       avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
       svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassist
       pausefilter pfthreshold avic v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi
       umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
       avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5,48-53

node 0 size: 95933 MB

node 0 free: 95276 MB

node 1 cpus: 6-11,54-59

node 1 size: 96765 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 1 free: 96474 MB
node 2 cpus: 12-17,60-65
node 2 size: 96765 MB
node 2 free: 96454 MB
node 3 cpus: 18-23,66-71
node 3 size: 96765 MB
node 3 free: 96484 MB
node 4 cpus: 24-29,72-77
node 4 size: 96765 MB
node 4 free: 96483 MB
node 5 cpus: 30-35,78-83
node 5 size: 96728 MB
node 5 free: 96379 MB
node 6 cpus: 36-41,84-89
node 6 size: 96765 MB
node 6 free: 96455 MB
node 7 cpus: 42-47,90-95
node 7 size: 96711 MB
node 7 free: 96231 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10
```

9. /proc/meminfo
MemTotal: 791757916 kB

10. who -r
run-level 3 Sep 30 02:22

11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat
man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmbdb-rebuild serial-getty@
sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
root=/dev/mapper/rhel-root

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
nohz_full=1-95

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 4.05 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 4050MHz

-----
15. tuned-adm active
Current active profile: latency-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compression_proactiveness   20
vm.dirty_background_bytes        0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvice never
enabled          [always] madvice never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
pages_to_scan      4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----  
20. Disk information
SPEC is set to: /cpu2017
Filesystem          Type  Size  Used  Avail Use% Mounted on
/dev/mapper/rhel-root xfs   170G  7.3G  163G  5%  /
```

```
-----  
21. /sys/devices/virtual/dmi/id
Vendor:           XFUSION
Product:          1258H V7
Product Family:  Genoa
```

```
-----  
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800
```

```
-----  
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:       XFUSION
BIOS Version:     2.09.26
BIOS Date:        08/15/2024
BIOS Revision:    2.9
```

Compiler Version Notes

```
=====| 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
C     | 657.xz_s(base, peak)
```

```
-----  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aoxx-compiler-4.0.0/bin
```

```
=====| 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
C++   | 641.leela_s(base, peak)
```

```
-----  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: A0CC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -futo -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 6488

Test Date: Sep-2024

Test Sponsor: xFusion

Hardware Availability: Nov-2023

Tested by: xFusion

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: Same as 605.mcf_s

657.xz_s: Same as 605.mcf_s

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 1258H V7
(AMD EPYC 9274F)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Test Date: Sep-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-29 14:27:58-0400.

Report generated on 2024-12-05 09:43:31 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-04.