



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

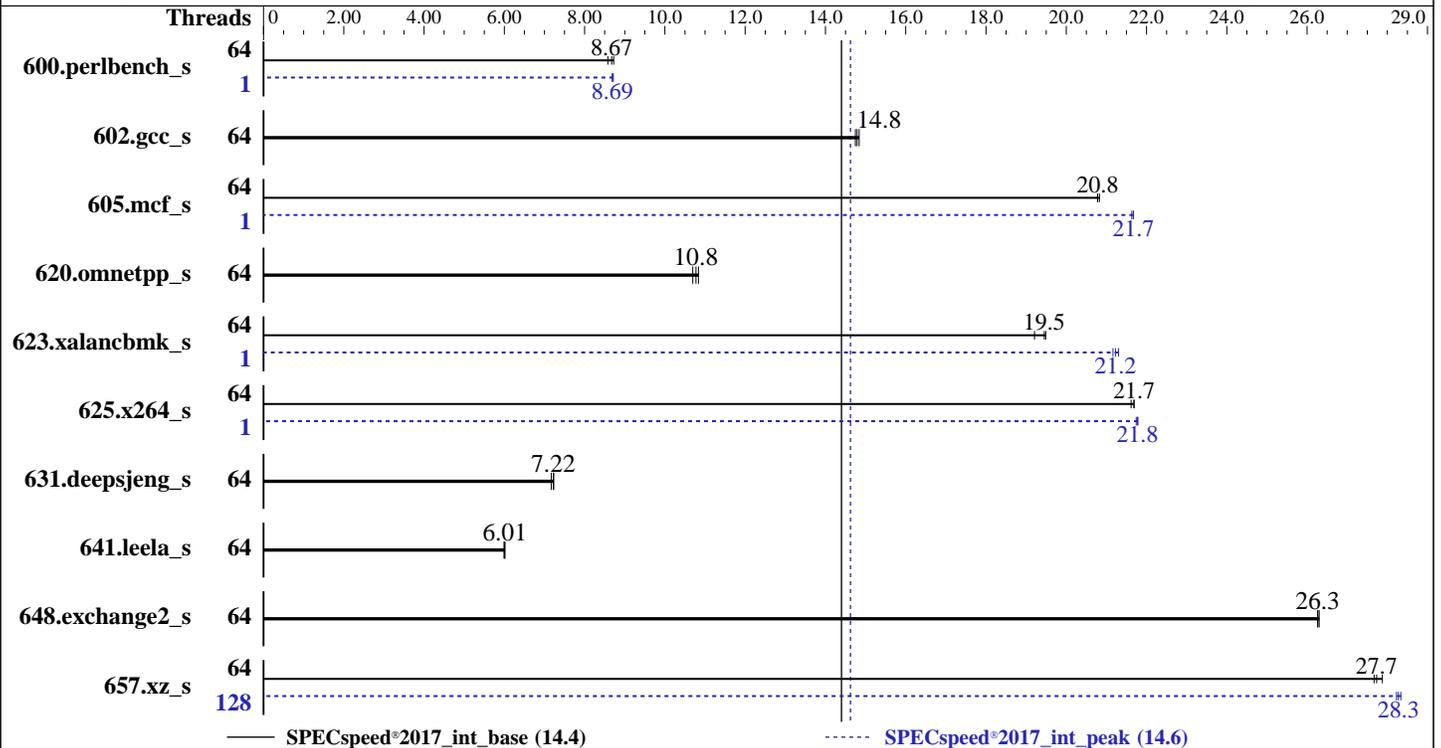

Hardware

CPU Name: AMD EPYC 9354
Max MHz: 3800
Nominal: 3250
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Parallel: Yes
Firmware: Version 2.09.26 released Aug-2024
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	203	8.73	207	8.58	205	8.67	1	204	8.69	204	8.69	204	8.72
602.gcc_s	64	269	14.8	270	14.7	268	14.8	64	269	14.8	270	14.7	268	14.8
605.mcf_s	64	227	20.8	227	20.8	227	20.8	1	218	21.7	218	21.7	218	21.6
620.omnetpp_s	64	153	10.7	151	10.8	151	10.8	64	153	10.7	151	10.8	151	10.8
623.xalancbmk_s	64	72.8	19.5	72.7	19.5	73.8	19.2	1	66.5	21.3	66.8	21.2	67.0	21.2
625.x264_s	64	81.6	21.6	81.3	21.7	81.3	21.7	1	81.0	21.8	81.0	21.8	81.1	21.7
631.deepsjeng_s	64	200	7.17	198	7.22	198	7.23	64	200	7.17	198	7.22	198	7.23
641.leela_s	64	284	6.01	285	5.99	284	6.01	64	284	6.01	285	5.99	284	6.01
648.exchange2_s	64	112	26.3	112	26.3	112	26.3	64	112	26.3	112	26.3	112	26.3
657.xz_s	64	222	27.9	223	27.7	223	27.7	128	219	28.2	218	28.3	219	28.3

SPECspeed®2017_int_base = **14.4**

SPECspeed®2017_int_peak = **14.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH = "/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
NUMA Nodes Per Socket = NPS4
```

```
Sysinfo program /cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Sep 26 05:40:35 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

```

```

-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.e19_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
-----

```

```

-----
2. w
 05:40:35 up 11 min,  0 users,  load average: 0.33, 0.28, 0.28
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
-----

```

```

-----
3. Username
From environment variable $USER:  root
-----

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) unlimited
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 6191057
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 6191057
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeak
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.040/temlogs/preenv.intspeed.040.0.log --lognum 040.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9354 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9354 32-Core Processor
BIOS Model name:       AMD EPYC 9354 32-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:              1
Frequency boost:        enabled
CPU max MHz:           3799.0720
CPU min MHz:           1500.0000
BogoMIPS:              6489.84
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
AMD-V

Virtualization: AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 95928 MB
node 0 free: 94958 MB
node 1 cpus: 8-15,72-79
node 1 size: 96764 MB
node 1 free: 96394 MB
node 2 cpus: 16-23,80-87
node 2 size: 96764 MB
node 2 free: 96415 MB
node 3 cpus: 24-31,88-95
node 3 size: 96728 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 3 free: 96358 MB
node 4 cpus: 32-39,96-103
node 4 size: 96764 MB
node 4 free: 96438 MB
node 5 cpus: 40-47,104-111
node 5 size: 96764 MB
node 5 free: 96431 MB
node 6 cpus: 48-55,112-119
node 6 size: 96764 MB
node 6 free: 96364 MB
node 7 cpus: 56-63,120-127
node 7 size: 96711 MB
node 7 free: 96160 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      791747028 kB

```

```

-----
10. who -r
    run-level 5 Sep 26 05:30

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target  Status
    graphical      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rshmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprump iprinit iprupdate iscsid
iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect
podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm
rhsm-facts rpmdm-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysextd wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
nohz_full=1-127
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 3.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3250MHz
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.0 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.0 (Plow)
system-release       Red Hat Enterprise Linux release 9.0 (Plow)
-----

```

```

-----
20. Disk information
SPEC is set to: /cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   70G   11G   60G  16% /
-----

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:              XFUSION
Product:             2258 V7
Product Family:     Genoa
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:         XFUSION
BIOS Version:        2.09.26
BIOS Date:           08/15/2024
BIOS Revision:       2.9
-----

```

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
          | 657.xz_s(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak) 631.deepsjeng_s(base, peak)
          | 641.leela_s(base, peak)
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

602.gcc_s: basepeak = yes

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258 V7
(AMD EPYC 9354)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Sep-2024
Hardware Availability: Nov-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

```
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-26 05:40:35-0400.
Report generated on 2024-12-05 09:43:30 by CPU2017 PDF formatter v6716.
Originally published on 2024-12-04.