



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573


Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

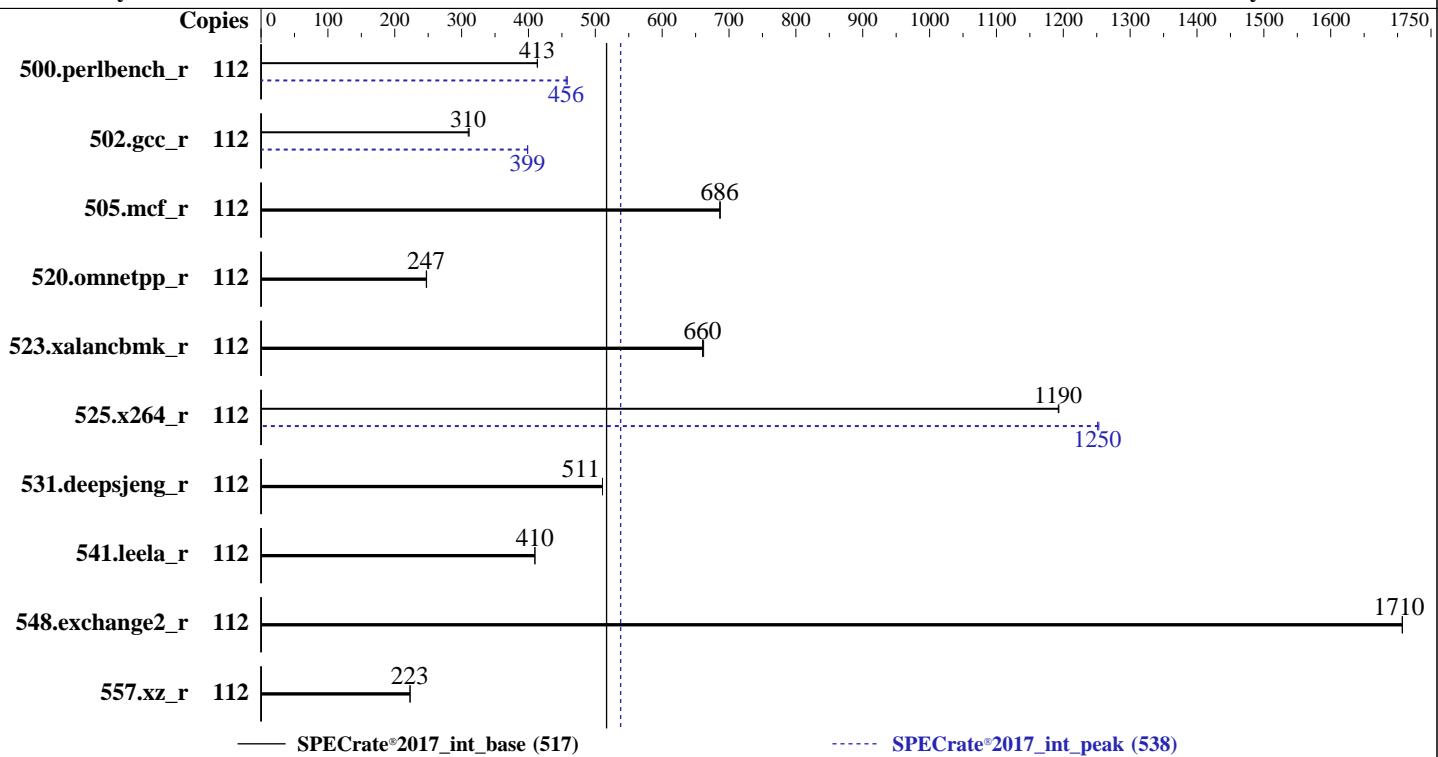

Hardware

CPU Name: Intel Xeon 6746E
Max MHz: 2700
Nominal: 2000
Enabled: 112 cores, 1 chip
Orderable: 1 chip
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per core
L3: 96 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R, running at 5600)
Storage: 80 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.1.1 released Oct-2024
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	432	413	431	413			112	389	458	391	456				
502.gcc_r	112	509	311	512	310			112	398	399	398	399				
505.mcf_r	112	263	687	264	686			112	263	687	264	686				
520.omnetpp_r	112	595	247	593	248			112	595	247	593	248				
523.xalancbmk_r	112	179	662	179	660			112	179	662	179	660				
525.x264_r	112	164	1190	164	1190			112	156	1250	157	1250				
531.deepsjeng_r	112	251	511	251	511			112	251	511	251	511				
541.leela_r	112	453	410	453	410			112	453	410	453	410				
548.exchange2_r	112	172	1710	172	1710			112	172	1710	172	1710				
557.xz_r	112	542	223	543	223			112	542	223	543	223				

SPECrate®2017_int_base = 517

SPECrate®2017_int_peak = 538

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ram
    disk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
```

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

```
    LLC Prefetch : Disabled
    Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    Energy Efficient Turbo : Disabled
        C1E : Disabled
        C-States : Autonomous
    Energy Efficient Policy : Performance
    CPU Interconnect Bus -
        Link Power Management : Disabled
    PCI ASPM L1 Link Power Management : Disabled
        DIMM Self Healing -
            on Uncorrectable Memory Error : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on AFN4705-R470 Sat Oct 26 00:42:43 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECCrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
-----  
1. uname -a  
Linux AFN4705-R470 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86_64 x86_64 x86_64 GNU/Linux  
  
-----  
2. w  
00:42:43 up 1 min, 1 user, load average: 0.75, 0.47, 0.19  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 00:41 35.00s 1.50s 0.01s /bin/bash  
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.0.2 --output_format html,pdf,txt  
  
-----  
3. Username  
From environment variable $USER: root  
  
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 1029381  
max locked memory       (kbytes, -l) 8192  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 1029381  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize=42  
login -- root  
-bash  
/bin/bash /home/DellFiles/bin/DELL_rate.sh  
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate  
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate  
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.0.2 --output_format  
html,pdf,txt  
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.0.2 --output_format  
html,pdf,txt  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c  
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=112 --define physicalfirst  
--define no-numa --reportable --tune base,peak -o all --define drop_caches --iterations 2 --define  
DL-VERS=6.0.2 --output_format html,pdf,txt intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile  
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=112 --define physicalfirst  
--define no-numa --reportable --tune base,peak --output_format all --define drop_caches --iterations 2  
--define DL-VERS=6.0.2 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size  
refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log  
--lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) 6746E
vendor_id : GenuineIntel
cpu family : 6
model : 175
stepping : 3
microcode : 0x30002c0
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores : 112
siblings : 112
1 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-111
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
Model name: Intel(R) Xeon(R) 6746E
BIOS Model name: Intel(R) Xeon(R) 6746E CPU @ 2.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 175
Thread(s) per core: 1
Core(s) per socket: 112
Socket(s): 1
Stepping: 3
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pnpi
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavenc
xgetbv1 xsaves cqmq_llc cqmq_occur_llc cqmq_mbm_total cqmq_mbm_local
split_lock_detect user_shstck avx_vnni lam wbnoinvd dtherm ida arat
pln pts vnmi umip pku ospke waitpkg gfn vaes vpclmulqdq tme rdpid
bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear
serialize pconfig arch_lbr ibt flush_lld arch_capabilities

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

Virtualization:	VT-x
L1d cache:	3.5 MiB (112 instances)
L1i cache:	7 MiB (112 instances)
L2 cache:	112 MiB (28 instances)
L3 cache:	96 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-111
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3.5M	8	Data	1	64	1	64
L1i	64K	7M	8	Instruction	1	128	1	64
L2	4M	112M	16	Unified	2	4096	1	64
L3	96M	96M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-111
node 0 size: 257371 MB
node 0 free: 244953 MB
node distances:
node 0
0: 10

9. /proc/meminfo
MemTotal: 263548524 kB

10. who -r
run-level 3 Oct 26 00:41

11. Systemd service manager version: systemd 254 (254.10+ssse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvme-fc-boot-connections
nvme-fc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

```
wickedd-autostart wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime    systemd-remount-fs
disabled          autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
                  gpm grub2-once haveged ipmi ipmievnd issue-add-ssh-keys kexec-load lummask man-db-create
                  multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
                  snmpd snmptrapd systemd-boot-check-no-failures systemd-confex systemd-network-generator
                  systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect          systemd-userdbd wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=c5450b9b-1d88-455f-bda3-3d157643f526
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 75:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECCrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Platform Notes (Continued)

max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 5.0G 76G 7% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R470
Product Family: PowerEdge
Serial: AFN4705

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x 002C069D002C MTC20F2085S1RC64BD1 USFF 32 GB 2 rank 6400, configured at 5600

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.1
BIOS Date: 10/17/2024
BIOS Revision: 1.1

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECCrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Peak Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes
523.xalancbmk_r: basepeak = yes
531.deepsjeng_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 517

PowerEdge R470 (Intel Xeon 6746E)

SPECCrate®2017_int_peak = 538

CPU2017 License: 6573

Test Date: Oct-2024

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.10.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-26 00:42:42-0400.

Report generated on 2024-12-11 13:46:35 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-11.