



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Nov-2024

Software Availability: Apr-2024

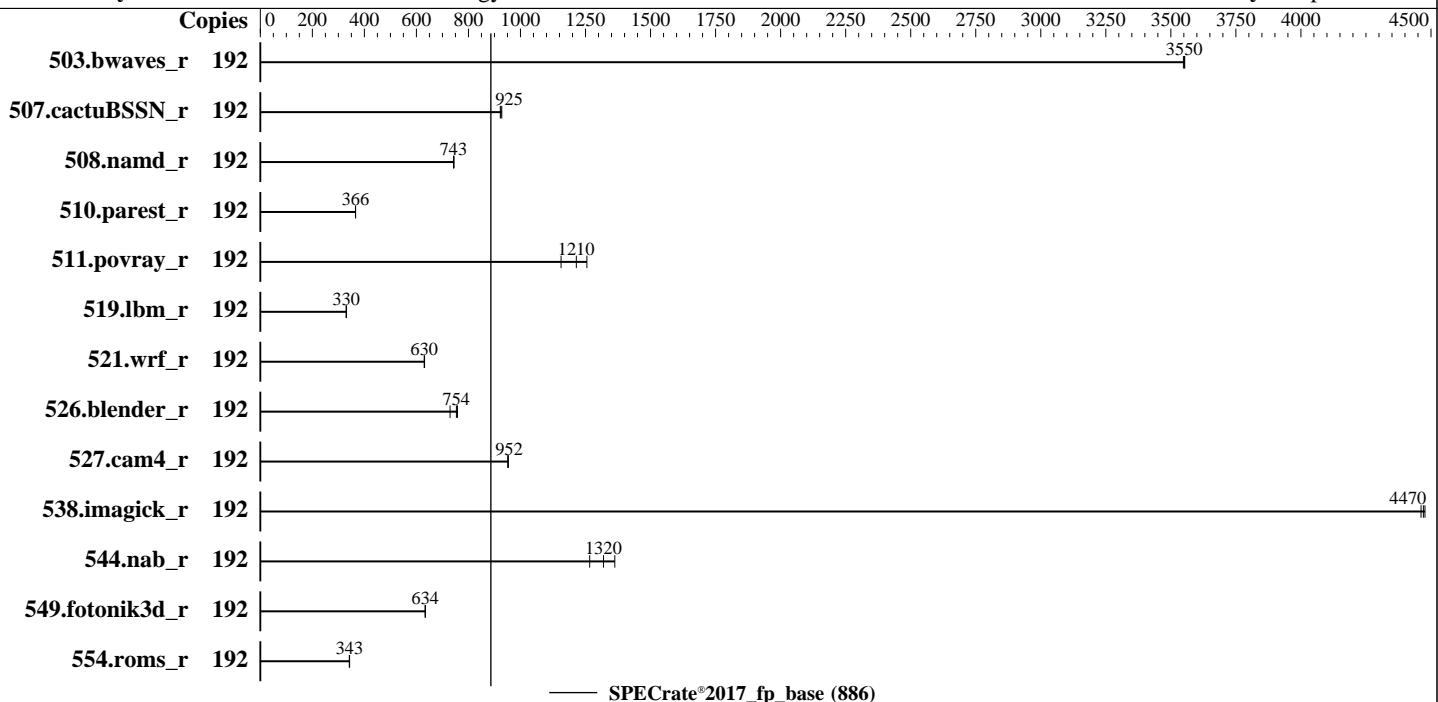

### Hardware

CPU Name: Intel Xeon 6740E  
Max MHz: 3200  
Nominal: 2400  
Enabled: 192 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per core  
L3: 96 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 1 x 3.84 TB NVME SSD  
Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
Compiler: Kernel 5.14.0-427.13.1.el9\_4.x86\_64  
C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Lenovo BIOS Version IHE107B 1.10 released Sep-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	542	3550	543	3550	<b>542</b>	<b>3550</b>							
507.cactusBSSN_r	192	<b>263</b>	<b>925</b>	263	922	262	928							
508.namd_r	192	245	745	<b>246</b>	<b>743</b>	246	743							
510.parest_r	192	1373	366	<b>1372</b>	<b>366</b>	1372	366							
511.povray_r	192	<b>369</b>	<b>1210</b>	357	1260	388	1160							
519.lbm_r	192	<b>612</b>	<b>330</b>	611	331	613	330							
521.wrf_r	192	681	631	<b>682</b>	<b>630</b>	682	630							
526.blender_r	192	<b>388</b>	<b>754</b>	401	729	386	758							
527.cam4_r	192	353	952	<b>353</b>	<b>952</b>	352	953							
538.imagick_r	192	<b>107</b>	<b>4470</b>	107	4460	107	4480							
544.nab_r	192	<b>245</b>	<b>1320</b>	237	1360	255	1270							
549.fotonik3d_r	192	1179	635	1181	633	<b>1180</b>	<b>634</b>							
554.roms_r	192	<b>890</b>	<b>343</b>	892	342	889	343							

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Adjacent Cache Prefetch set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Nov  7 09:47:33 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

-----

```
1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
09:47:33 up 3 min, 0 users, load average: 0.27, 0.14, 0.05
USER      TTY      LOGIN@     IDLE     JCPU    PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

```
4. ulimit -a
real-time non-blocking time  (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals              (-i) 4127136
max locked memory           (kbytes, -l) unlimited
max memory size             (kbytes, -m) unlimited
open files                  (-n) 102400
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes           (-u) 4127136
virtual memory               (-v) unlimited
file locks                  (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
sh Run703-compliant-ic2024.1-lin-sierraforest-ratefp-base-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=96 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=96 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base
  --output_format all --nopower --runmode rate --tune base --size rerate fprate --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.634/templogs/preenv.fprate.634.0.log --lognum 634.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6740E
vendor_id       : GenuineIntel
cpu family     : 6
model          : 175
stepping        : 3
microcode       : 0x3000270
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 96
siblings        : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

physical id 1: apicids  
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5  
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61  
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668  
,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.4:  
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 52 bits physical, 48 bits virtual  
Byte Order: Little Endian  
CPU(s): 192  
On-line CPU(s) list: 0-191  
Vendor ID: GenuineIntel  
BIOS Vendor ID: Intel(R) Corporation  
Model name: Intel(R) Xeon(R) 6740E  
BIOS Model name: Intel(R) Xeon(R) 6740E  
CPU family: 6  
Model: 175  
Thread(s) per core: 1  
Core(s) per socket: 96  
Socket(s): 2  
Stepping: 3  
BogoMIPS: 4800.00  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb  
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl  
xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq  
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm  
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave  
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2  
cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow  
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2  
erms invpcid cq_m rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni  
xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occu_llc cq_m_mb_m_total  
cq_m_mb_m_local split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat  
pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid  
bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear  
serialize pconfig arch_lbr ibt flush_lld arch_capabilities  
Virtualization: VT-x  
L1d cache: 6 MiB (192 instances)  
L1i cache: 12 MiB (192 instances)  
L2 cache: 192 MiB (48 instances)  
L3 cache: 192 MiB (2 instances)  
NUMA node(s): 2  
NUMA node0 CPU(s): 0-95  
NUMA node1 CPU(s): 96-191  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability Llft: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

<b>Lenovo Global Technology</b> ThinkSystem SR630 V4 (2.40 GHz, Intel Xeon 6740E)	SPECrate®2017_fp_base = 886  <b>SPECrate®2017_fp_peak = Not Run</b>
<b>CPU2017 License:</b> 9017	<b>Test Date:</b> Nov-2024
<b>Test Sponsor:</b> Lenovo Global Technology	<b>Hardware Availability:</b> Nov-2024
<b>Tested by:</b> Lenovo Global Technology	<b>Software Availability:</b> Apr-2024

## **Platform Notes (Continued)**

Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d    32K       6M     8 Data        1        64          1           64
  L1i    64K      12M     8 Instruction  1       128          1           64
  L2      4M      192M    16 Unified     2      4096          1           64
  L3     96M      192M    12 Unified     3  131072          1           64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-95
node 0 size: 515767 MB
node 0 free: 514519 MB
node 1 cpus: 96-191
node 1 size: 516055 MB
node 1 free: 514729 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

9. /proc/meminfo  
MemTotal: 1056587232 kB

10. who -r  
run-level 3 Nov 7 09:44

```
11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target      Status
multi-user          running
```

```
12. Services, from systemctl list-unit-files
   STATE           UNIT FILES
  enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited chrony cron
                 dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                 mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
                 selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2
                 upower
  enabled-runtime systemd-remount-fs
disabled      canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                 chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
                 kvm_stat man-db-restart-cache-update nftables nvme-fc-boot-connections pesign rdisc rhcd rhsm
                 rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
                 systemd-boot-check-no-failures systemd-pstore systemd-sysext
generated      jexec
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                 systemd-sysupdate-reboot
```

**(Continued on next page)**



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/boot/vmlinuz-5.14.0-427.13.1.el9\_4.x86\_64  
root=UUID=218263b5-b938-4bb9-acd2-fdd6e13af967  
ro  
resume=UUID=28b98cc0-6b11-4f02-b151-4d764447b0f5

-----  
14. cpupower frequency-info  
analyzing CPU 177:  
    Unable to determine current policy  
    boost state support:  
        Supported: yes  
        Active: yes

-----  
15. sysctl  
kernel.numa\_balancing               1  
kernel.randomize\_va\_space           2  
vm.compaction\_proactiveness       20  
vm.dirty\_background\_bytes          0  
vm.dirty\_background\_ratio        10  
vm.dirty\_bytes                      0  
vm.dirty\_expire\_centisecs       3000  
vm.dirty\_ratio                     20  
vm.dirty\_writeback\_centisecs    500  
vm.dirtytime\_expire\_seconds     43200  
vm.extfrag\_threshold             500  
vm.min\_unmapped\_ratio           1  
vm.nr\_hugepages                  0  
vm.nr\_hugepages\_mempolicy      0  
vm.nr\_overcommit\_hugepages    0  
vm.swappiness                     60  
vm.watermark\_boost\_factor     15000  
vm.watermark\_scale\_factor     10  
vm.zone\_reclaim\_mode          0

-----  
16. /sys/kernel/mm/transparent\_hugepage  
defrag              always defer defer+madvise [madvise] never  
enabled             [always] madvise never  
hpage\_pmd\_size   2097152  
shmem\_enabled     always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs  60000  
defrag                 1  
max\_ptes\_none        511  
max\_ptes\_shared      256  
max\_ptes\_swap        64  
pages\_to\_scan        4096  
scan\_sleep\_millisecs 10000

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release     Red Hat Enterprise Linux 9.4 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)  
system-release Red Hat Enterprise Linux release 9.4 (Plow)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

### 19. Disk information

```
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   3.5T  42G  3.4T   2%  /home
```

### 20. /sys/devices/virtual/dmi/id

```
Vendor:          Lenovo
Product:         ThinkSystem SR630 V4
Product Family:  ThinkSystem
Serial:          0987654321
```

### 21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

```
12x SK Hynix HMCG94AHBRA275N 64 GB 2 rank 6400
4x SK Hynix HMCG94AHBRA281N 64 GB 2 rank 6400
```

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:
BIOS Version:   IHE107B-1.10
BIOS Date:      09/11/2024
BIOS Revision:  1.10
Firmware Revision: 1.0
```

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
=====
C++          | 508.namd_r(base) 510.parest_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C       | 511.povray_r(base) 526.blender_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactusBSSN\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.40 GHz, Intel Xeon 6740E)

SPECrate®2017\_fp\_base = 886

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-06 20:47:32-0500.

Report generated on 2024-12-05 10:08:50 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-03.