



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3


Test Date: Nov-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Sep-2024

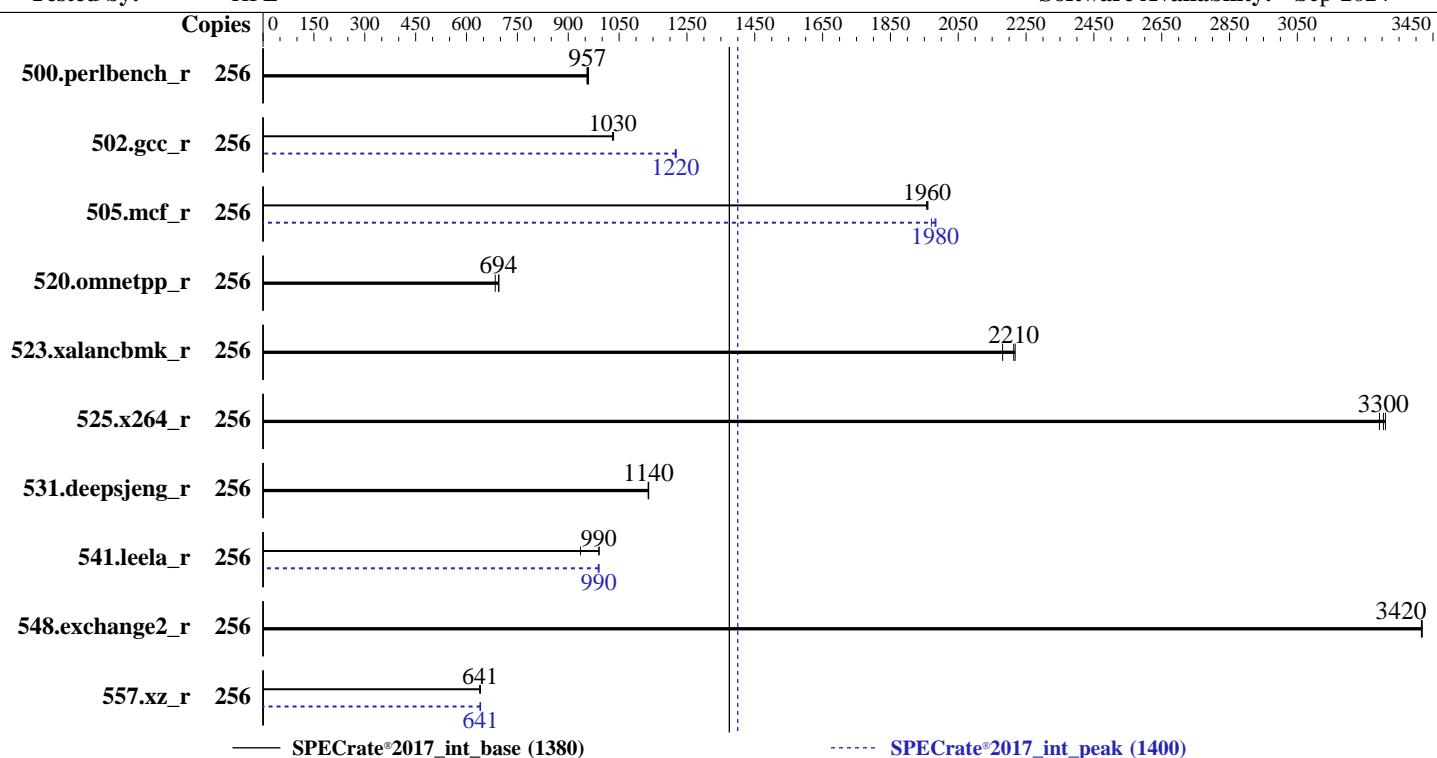

Hardware

CPU Name: AMD EPYC 9535

Max MHz: 4300

Nominal: 2400

Enabled: 128 cores, 2 chips, 2 threads/core

Orderable: 1,2 chips

Cache L1: 32 KB I + 48 KB D on chip per core

L2: 1 MB I+D on chip per core

L3: 256 MB I+D on chip per chip,
16 MB shared / 4 cores

Other: None

Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,
running at 6000)

Storage: 1 x 960 GB SATA SSD

Other: CPU Cooling: Air

Software

OS:

SUSE Linux Enterprise Server 15 SP6

Kernel 6.4.0-150600.21-default

Compiler: C/C++/Fortran: Version 5.0.0 of AOCC

Parallel: No

Firmware: HPE BIOS Version v2.20 10/31/2024 released Oct-2024

File System:

xfs

System State: Run level 5 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 32/64-bit

Other: None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-----------------|--------|------------|-------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 256 | 425 | 960 | 426 | 957 | 427 | 955 | 256 | 425 | 960 | 426 | 957 | 427 | 955 | | |
| 502.gcc_r | 256 | 351 | 1030 | 352 | 1030 | 352 | 1030 | 256 | 298 | 1220 | 298 | 1220 | 298 | 1220 | | |
| 505.mcf_r | 256 | 211 | 1960 | 211 | 1960 | 211 | 1960 | 256 | 210 | 1970 | 209 | 1980 | 208 | 1980 | | |
| 520.omnetpp_r | 256 | 491 | 685 | 484 | 694 | 483 | 696 | 256 | 491 | 685 | 484 | 694 | 483 | 696 | | |
| 523.xalancbmk_r | 256 | 122 | 2210 | 124 | 2180 | 122 | 2220 | 256 | 122 | 2210 | 124 | 2180 | 122 | 2220 | | |
| 525.x264_r | 256 | 136 | 3300 | 135 | 3310 | 136 | 3290 | 256 | 136 | 3300 | 135 | 3310 | 136 | 3290 | | |
| 531.deepsjeng_r | 256 | 258 | 1140 | 258 | 1140 | 258 | 1140 | 256 | 258 | 1140 | 258 | 1140 | 258 | 1140 | | |
| 541.leela_r | 256 | 428 | 991 | 453 | 936 | 428 | 990 | 256 | 428 | 990 | 429 | 988 | 428 | 990 | | |
| 548.exchange2_r | 256 | 196 | 3420 | 196 | 3420 | 196 | 3420 | 256 | 196 | 3420 | 196 | 3420 | 196 | 3420 | | |
| 557.xz_r | 256 | 432 | 641 | 432 | 641 | 433 | 639 | 256 | 431 | 641 | 432 | 640 | 431 | 641 | | |

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

NUMA memory domains per socket set to Four memory domains per socket

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo

```
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Nov 22 15:17:48 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -a

```
Linux localhost.localdomain 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024  
(36c1e09) x86_64 x86_64 x86_64 GNU/Linux
```

2. w

```
15:17:48 up 4 min, 3 users, load average: 0.93, 4.15, 2.32  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root : 15:14 ?xdm? 27:28 0.02s gdm-session-worker [pam/gdm-password]  
root seat0 login- 15:14 0.00s 0.00s 0.01s /usr/lib/gdm/gdm-x-session  
--register-session --run-script gnome  
root :1 15:14 ?xdm? 27:28 0.01s /usr/lib/gdm/gdm-x-session  
--register-session --run-script gnome  
root pts/1 172.17.1.96 15:14 20.00s 0.99s 0.13s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3094151  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3094151  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/1  
-bash  
python3 ./run_intrate.py  
/bin/bash ./amd_rate_aocc500_znver5_A1.sh  
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.009/templogs/preenv.intrate.009.0.log --lognum 009.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
    model name      : AMD EPYC 9535 64-Core Processor  
    vendor_id       : AuthenticAMD  
    cpu family     : 26  
    model          : 2  
    stepping       : 1  
    microcode      : 0xb00211a  
    bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
    TLB size        : 192 4K pages  
    cpu cores      : 64  
    siblings        : 128  
    2 physical ids (chips)  
    256 processors (hardware threads)  
    physical id 0: core ids  
    0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123  
    physical id 1: core ids  
    0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123  
    physical id 0: apicids  
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,  
    240-247  
    physical id 1: apicids  
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4  
    64-471,480-487,496-503  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:  
Architecture:                                x86_64  
CPU op-mode(s):                            32-bit, 64-bit  
Address sizes:                             52 bits physical, 57 bits virtual  
Byte Order:                                Little Endian  
CPU(s):                                     256  
On-line CPU(s) list:                      0-255  
Vendor ID:                                 AuthenticAMD  
BIOS Vendor ID:                           Advanced Micro Devices, Inc.  
Model name:                                AMD EPYC 9535 64-Core Processor  
BIOS Model name:                          AMD EPYC 9535 64-Core Processor  
BIOS CPU family:                          CPU @ 2.4GHz  
CPU family:                                107  
Model:                                      26  
Thread(s) per core:                        2  
Core(s) per socket:                        64  
Socket(s):                                 2  
Stepping:                                    1  
Frequency boost:                           enabled  
CPU(s) scaling MHz:                        102%  
CPU max MHz:                               2400.0000  
CPU min MHz:                               1500.0000  
BogoMIPS:                                    4792.44  
Flags:                                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat  
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb  
                                         rdtscl lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid  
                                         extd_apicid aperf_fmpf perf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Date: Nov-2024

Test Sponsor: HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Sep-2024

Platform Notes (Continued)

```
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osw ibs skininit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaverptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassist pausefilter
pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap
```

Virtualization:

AMD-V

L1d cache:

6 MiB (128 instances)

L1i cache:

4 MiB (128 instances)

L2 cache:

128 MiB (128 instances)

L3 cache:

512 MiB (32 instances)

NUMA node(s):

8

NUMA node0 CPU(s):

0-15,128-143

NUMA node1 CPU(s):

16-31,144-159

NUMA node2 CPU(s):

32-47,160-175

NUMA node3 CPU(s):

48-63,176-191

NUMA node4 CPU(s):

64-79,192-207

NUMA node5 CPU(s):

80-95,208-223

NUMA node6 CPU(s):

96-111,224-239

NUMA node7 CPU(s):

112-127,240-255

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llrf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 6M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 4M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 128M | 16 | Unified | 2 | 1024 | 1 | 64 |
| L3 | 16M | 512M | 16 | Unified | 3 | 16384 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15,128-143

node 0 size: 96403 MB

node 0 free: 95746 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Platform Notes (Continued)

```
node 1 cpus: 16-31,144-159
node 1 size: 96759 MB
node 1 free: 96281 MB
node 2 cpus: 32-47,160-175
node 2 size: 96759 MB
node 2 free: 95757 MB
node 3 cpus: 48-63,176-191
node 3 size: 96759 MB
node 3 free: 95866 MB
node 4 cpus: 64-79,192-207
node 4 size: 96759 MB
node 4 free: 96008 MB
node 5 cpus: 80-95,208-223
node 5 size: 96759 MB
node 5 free: 96438 MB
node 6 cpus: 96-111,224-239
node 6 size: 96759 MB
node 6 free: 96343 MB
node 7 cpus: 112-127,240-255
node 7 size: 96607 MB
node 7 free: 96114 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  12  12  12  32  32  32  32
  1: 12  10  12  12  32  32  32  32
  2: 12  12  10  12  32  32  32  32
  3: 12  12  12  10  32  32  32  32
  4: 32  32  32  32  10  12  12  12
  5: 32  32  32  32  12  10  12  12
  6: 32  32  32  32  12  12  10  12
  7: 32  32  32  32  12  12  12  10
```

```
9. /proc/meminfo
MemTotal:      792134064 kB
```

```
10. who -r
run-level 5 Nov 22 15:14
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target     Status
graphical          running
```

```
12. Services, from systemctl list-unit-files
STATE           UNIT FILES
enabled         ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                  bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                  lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                  wickeddd-auto4 wickeddd-dhcp4 wickeddd-dhcp6 wickeddd-nanny wpa_supplicant
enabled-runtime  systemd-remount-fs
disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                  autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                  chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables
                  exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievfd
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
                  ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                  smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Platform Notes (Continued)

```
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcscd saned@ systemd-userdbd wicd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=03804bb9-43a7-4bf1-b551-5c912b239e58
    splash=silent
    mitigations=auto
    quiet
    security=apparmor

-----
14. cpupower frequency-info
    analyzing CPU 130:
        current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
15. tuned-adm active
    No current active profile.

-----
16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space       0
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes       0
    vm.dirty_background_ratio      10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs     3000
    vm.dirty_ratio                 8
    vm.dirty_writeback_centisecs   500
    vm.dirtytime_expire_seconds    43200
    vm.extfrag_threshold           500
    vm.min_unmapped_ratio          1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy       0
    vm.nr_overcommit_hugepages     0
    vm.swappiness                  1
    vm.watermark_boost_factor      15000
    vm.watermark_scale_factor       10
    vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                   1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Platform Notes (Continued)

```
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sdd2        xfs   892G  47G   845G   6%  /
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:          HPE  
Product:         ProLiant DL385 Gen11  
Product Family:  ProLiant  
Serial:          DL385GEN11-001
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
24x Hynix HMCG88AHBRA472N 32 GB 2 rank 6400, configured at 6000
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      HPE  
BIOS Version:     2.20  
BIOS Date:        10/31/2024  
BIOS Revision:    2.20  
Firmware Revision: 1.63
```

Compiler Version Notes

```
=====  
C      | 502.gcc_r(peak)  
=====  
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
```

```
=====  
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)  
| 557.xz_r(base, peak)  
=====  
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.40 GHz, AMD EPYC 9535)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdaloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdaloc -ldl
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

| | |
|--|--|
| Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL385 Gen11 (2.40 GHz, AMD EPYC 9535) | SPECrate®2017_int_base = 1380 SPECrate®2017_int_peak = 1400 |
| CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE | Test Date: Nov-2024 Hardware Availability: Jan-2025 Software Availability: Sep-2024 |

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner  
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIB  
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdaloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fsto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531 deensieng r: basepeak = yes

```
541.leela_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIB -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_int_base = 1380

SPECrate®2017_int_peak = 1400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

541.leela_r (continued):

```
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdaloc-ext -ldl
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-22 04:47:48-0500.

Report generated on 2024-12-18 18:20:35 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.