



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

**SPECrate®2017\_int\_base = 1390**

**SPECrate®2017\_int\_peak = 1420**

CPU2017 License: 3


**Test Date:** Nov-2024

**Test Sponsor:** HPE

**Hardware Availability:** Jan-2025

**Tested by:** HPE

**Software Availability:** Sep-2024

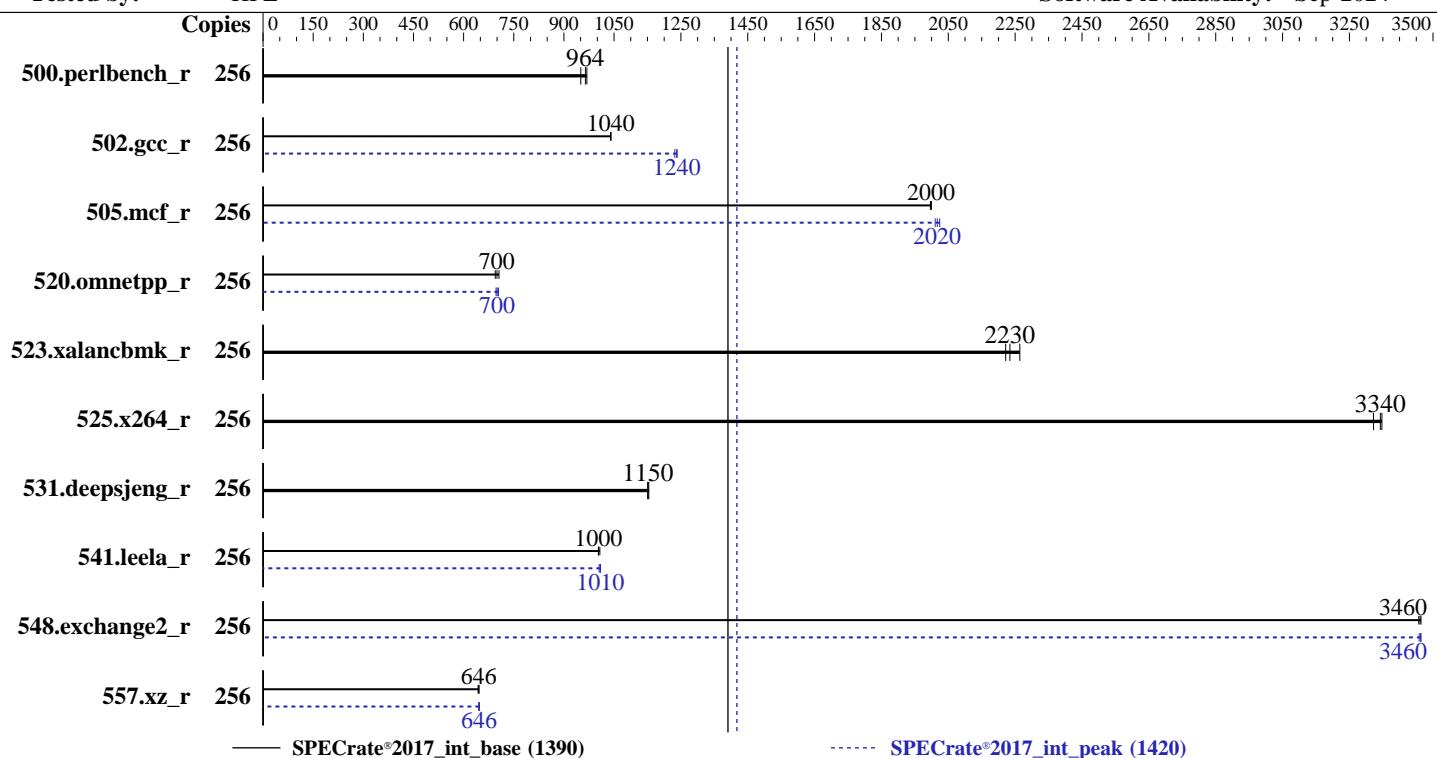

— SPECrate®2017\_int\_base (1390)

----- SPECrate®2017\_int\_peak (1420)

## Hardware

CPU Name: AMD EPYC 9535

Max MHz: 4300

Nominal: 2400

Enabled: 128 cores, 2 chips, 2 threads/core

Orderable: 1,2 chips

Cache L1: 32 KB I + 48 KB D on chip per core

L2: 1 MB I+D on chip per core

L3: 256 MB I+D on chip per chip,

16 MB shared / 4 cores

Other: None

Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,  
running at 6000)

Storage: 1 x 480 GB SATA SSD

Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6

Kernel 6.4.0-150600.21-default

Compiler: C/C++/Fortran: Version 5.0.0 of AOCC

Parallel: No

Firmware: HPE BIOS Version v2.20 10/31/2024 released Oct-2024

File System: btrfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 32/64-bit

Other: None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

**SPECrate®2017\_int\_base = 1390**

**SPECrate®2017\_int\_peak = 1420**

CPU2017 License: 3

**Test Date:** Nov-2024

Test Sponsor: HPE

**Hardware Availability:** Jan-2025

Tested by: HPE

**Software Availability:** Sep-2024

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	429	951	<b>423</b>	<b>964</b>	421	969	256	429	951	<b>423</b>	<b>964</b>	421	969		
502.gcc_r	256	349	1040	348	1040	<b>348</b>	<b>1040</b>	256	293	1240	<b>293</b>	<b>1240</b>	294	1230		
505.mcf_r	256	207	2000	<b>207</b>	<b>2000</b>	207	2000	256	<b>205</b>	<b>2020</b>	206	2010	204	2020		
520.omnetpp_r	256	483	695	476	706	<b>480</b>	<b>700</b>	256	<b>480</b>	<b>700</b>	477	704	482	697		
523.xalancbmk_r	256	122	2220	<b>121</b>	<b>2230</b>	119	2260	256	122	2220	<b>121</b>	<b>2230</b>	119	2260		
525.x264_r	256	135	3320	134	3350	<b>134</b>	<b>3340</b>	256	135	3320	134	3350	<b>134</b>	<b>3340</b>		
531.deepsjeng_r	256	255	1150	254	1150	<b>255</b>	<b>1150</b>	256	255	1150	254	1150	<b>255</b>	<b>1150</b>		
541.leela_r	256	423	1000	421	1010	<b>422</b>	<b>1000</b>	256	420	1010	<b>420</b>	<b>1010</b>	422	1010		
548.exchange2_r	256	194	3460	194	3460	<b>194</b>	<b>3460</b>	256	<b>194</b>	<b>3460</b>	194	3460	194	3460		
557.xz_r	256	428	646	430	643	<b>428</b>	<b>646</b>	256	<b>428</b>	<b>646</b>	427	647	428	646		

**SPECrate®2017\_int\_base = 1390**

**SPECrate®2017\_int\_peak = 1420**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

NUMA memory domains per socket set to Four memory domains per socket

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Nov 20 15:19:32 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Platform Notes (Continued)

18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
15:19:32 up 3 min, 1 user, load average: 3.00, 5.57, 2.68  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 172.17.1.109 22Apr24 16.00s 0.91s 0.08s /bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3094166  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3094166  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize=31  
sshd: /usr/sbin/sshd -D [listener] 1 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
python3 ./run\_intrate.py  
/bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.052/templogs/preenv.intrate.052.0.log --lognum 052.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : AMD EPYC 9535 64-Core Processor

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

**SPECrate®2017\_int\_base = 1390**

**SPECrate®2017\_int\_peak = 1420**

CPU2017 License: 3

**Test Date:** Nov-2024

Test Sponsor: HPE

**Hardware Availability:** Jan-2025

Tested by: HPE

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

vendor_id      : AuthenticAMD
cpu family    : 26
model         : 2
stepping       : 1
microcode     : 0xb00211a
bugs          : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids
0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
physical id 1: core ids
0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
64-471,480-487,496-503

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	256
On-line CPU(s) list:	0-255
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9535 64-Core Processor
BIOS Model name:	AMD EPYC 9535 64-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	64
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	105%
CPU max MHz:	2400.0000
CPU min MHz:	1500.0000
BogoMIPS:	4792.82
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpbgb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

**SPECrate®2017\_int\_base = 1390**

**SPECrate®2017\_int\_peak = 1420**

CPU2017 License: 3

**Test Date:** Nov-2024

Test Sponsor: HPE

**Hardware Availability:** Jan-2025

Tested by: HPE

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaverptr rdpru wbnoinvd amd_ppin cppo arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

Virtualization:

L1d cache:	AMD-V
L1i cache:	6 MiB (128 instances)
L2 cache:	4 MiB (128 instances)
L3 cache:	128 MiB (128 instances)

NUMA node(s):

NUMA node0 CPU(s):	32
NUMA node1 CPU(s):	0-3,128-131
NUMA node2 CPU(s):	4-7,132-135
NUMA node3 CPU(s):	8-11,136-139
NUMA node4 CPU(s):	12-15,140-143
NUMA node5 CPU(s):	16-19,144-147
NUMA node6 CPU(s):	20-23,148-151
NUMA node7 CPU(s):	24-27,152-155
NUMA node8 CPU(s):	28-31,156-159
NUMA node9 CPU(s):	32-35,160-163
NUMA node10 CPU(s):	36-39,164-167
NUMA node11 CPU(s):	40-43,168-171
NUMA node12 CPU(s):	44-47,172-175
NUMA node13 CPU(s):	48-51,176-179
NUMA node14 CPU(s):	52-55,180-183
NUMA node15 CPU(s):	56-59,184-187
NUMA node16 CPU(s):	60-63,188-191
NUMA node17 CPU(s):	64-67,192-195
NUMA node18 CPU(s):	68-71,196-199
NUMA node19 CPU(s):	72-75,200-203
NUMA node20 CPU(s):	76-79,204-207
NUMA node21 CPU(s):	80-83,208-211
NUMA node22 CPU(s):	84-87,212-215
NUMA node23 CPU(s):	88-91,216-219
NUMA node24 CPU(s):	92-95,220-223
NUMA node25 CPU(s):	96-99,224-227
NUMA node26 CPU(s):	100-103,228-231
NUMA node27 CPU(s):	104-107,232-235
NUMA node28 CPU(s):	108-111,236-239
NUMA node29 CPU(s):	112-115,240-243
NUMA node30 CPU(s):	116-119,244-247
NUMA node31 CPU(s):	120-123,248-251

Vulnerability Gather data sampling:	Not affected
-------------------------------------	--------------

Vulnerability Itlb multihit:	Not affected
------------------------------	--------------

Vulnerability Llft:	Not affected
---------------------	--------------

Vulnerability Mds:	Not affected
--------------------	--------------

Vulnerability Meltdown:	Not affected
-------------------------	--------------

Vulnerability Mmio stale data:	Not affected
--------------------------------	--------------

Vulnerability Reg file data sampling:	Not affected
---------------------------------------	--------------

Vulnerability Retbleed:	Not affected
-------------------------	--------------

Vulnerability Spec rstack overflow:	Not affected
-------------------------------------	--------------

Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
----------------------------------	---

Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
---------------------------	--

Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
---------------------------	--

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Platform Notes (Continued)

always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	16M	512M	16	Unified	3	16384	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

node 0 cpus: 0-3,128-131

node 0 size: 23874 MB

node 0 free: 23665 MB

node 1 cpus: 4-7,132-135

node 1 size: 24189 MB

node 1 free: 24039 MB

node 2 cpus: 8-11,136-139

node 2 size: 24189 MB

node 2 free: 24077 MB

node 3 cpus: 12-15,140-143

node 3 size: 24189 MB

node 3 free: 24066 MB

node 4 cpus: 16-19,144-147

node 4 size: 24189 MB

node 4 free: 23996 MB

node 5 cpus: 20-23,148-151

node 5 size: 24189 MB

node 5 free: 24038 MB

node 6 cpus: 24-27,152-155

node 6 size: 24189 MB

node 6 free: 24038 MB

node 7 cpus: 28-31,156-159

node 7 size: 24189 MB

node 7 free: 24017 MB

node 8 cpus: 32-35,160-163

node 8 size: 24189 MB

node 8 free: 24045 MB

node 9 cpus: 36-39,164-167

node 9 size: 24189 MB

node 9 free: 24042 MB

node 10 cpus: 40-43,168-171

node 10 size: 24189 MB

node 10 free: 24061 MB

node 11 cpus: 44-47,172-175

node 11 size: 24189 MB

node 11 free: 24069 MB

node 12 cpus: 48-51,176-179

node 12 size: 24189 MB

node 12 free: 24075 MB

node 13 cpus: 52-55,180-183

node 13 size: 24189 MB

node 13 free: 24060 MB

node 14 cpus: 56-59,184-187

node 14 size: 24189 MB

node 14 free: 24077 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Platform Notes (Continued)

```
node 15 cpus: 60-63,188-191
node 15 size: 24189 MB
node 15 free: 24072 MB
node 16 cpus: 64-67,192-195
node 16 size: 24151 MB
node 16 free: 24044 MB
node 17 cpus: 68-71,196-199
node 17 size: 24189 MB
node 17 free: 24070 MB
node 18 cpus: 72-75,200-203
node 18 size: 24189 MB
node 18 free: 24082 MB
node 19 cpus: 76-79,204-207
node 19 size: 24189 MB
node 19 free: 24077 MB
node 20 cpus: 80-83,208-211
node 20 size: 24189 MB
node 20 free: 24057 MB
node 21 cpus: 84-87,212-215
node 21 size: 24189 MB
node 21 free: 24056 MB
node 22 cpus: 88-91,216-219
node 22 size: 24189 MB
node 22 free: 24044 MB
node 23 cpus: 92-95,220-223
node 23 size: 24189 MB
node 23 free: 24059 MB
node 24 cpus: 96-99,224-227
node 24 size: 24189 MB
node 24 free: 23990 MB
node 25 cpus: 100-103,228-231
node 25 size: 24189 MB
node 25 free: 24015 MB
node 26 cpus: 104-107,232-235
node 26 size: 24189 MB
node 26 free: 24021 MB
node 27 cpus: 108-111,236-239
node 27 size: 24189 MB
node 27 free: 24000 MB
node 28 cpus: 112-115,240-243
node 28 size: 24189 MB
node 28 free: 24046 MB
node 29 cpus: 116-119,244-247
node 29 size: 24189 MB
node 29 free: 24089 MB
node 30 cpus: 120-123,248-251
node 30 size: 24189 MB
node 30 free: 24054 MB
node 31 cpus: 124-127,252-255
node 31 size: 24037 MB
node 31 free: 23920 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
 0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32
 1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32
 2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

(Test sponsor: HPE)  
ProLiant DL365 Gen11

**PROLiant DL360 Gen10  
(2.40 GHz, AMD EPYC 9535)**

SPECrate®2017 int base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Date: Nov-2024

**Test Sponsor:** HPE

Hardware Availability: Jan-2025

Tested by: HPE

Software Availability: Sep-2024

## **Platform Notes (Continued)**

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Platform Notes (Continued)

```
9. /proc/meminfo
MemTotal:      792132076 kB

-----
10. who -r
    run-level 3 Apr 22 17:45

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target      Status
    multi-user          running

-----
12. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          apparmor auditd cron@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
                    purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                    wickedd-dhcp6 wickedd-nanny
    enabled-runtime   systemd-remount-fs
    disabled         blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                    grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
                    serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
                    systemd-sysext systemd-time-wait-sync systemd-timesyncd
    indirect        pcscd systemd-userdbd wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=4bcelf8-16cc-4194-a8eb-e8f8705e985c
    splash=silent
    mitigations=auto
    quiet
    security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 225:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes

-----
15. sysctl
    kernel.numa_balancing      1
    kernel.randomize_va_space  0
    vm.compaction_proactiveness 20
    vm.dirty_background_bytes  0
    vm.dirty_background_ratio  10
    vm.dirty_bytes              0
    vm.dirty_expire_centisecs 3000
    vm.dirty_ratio              8
    vm.dirty_writeback_centisecs 500
    vm.dirtytime_expire_seconds 43200
    vm.extfrag_threshold       500
    vm.min_unmapped_ratio     1
    vm.nr_hugepages            0
    vm.nr_hugepages_mempolicy  0
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag          [always] defer defer+madvise madvise never
    enabled         [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs     60000
    defrag                     1
    max_ptes_none             511
    max_ptes_shared            256
    max_ptes_swap              64
    pages_to_scan              4096
    scan_sleep_millisecs      10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type   Size  Used Avail Use% Mounted on
    /dev/sda2        btrfs  445G  35G  407G  8%  /home

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          HPE
    Product:         ProLiant DL365 Gen11
    Product Family: ProLiant
    Serial:          DL365G11-001

-----
21. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        24x Hynix HMCG88AHBRA471N 32 GB 2 rank 6400, configured at 6000

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:          HPE
    BIOS Version:         2.20
    BIOS Date:            10/31/2024
    BIOS Revision:        2.20
    Firmware Revision:   1.62
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C | 502.gcc\_r(peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 548.exchange2\_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdaalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdaalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Peak Optimization Flags (Continued)

557.xz\_r (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl
```

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11  
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017\_int\_base = 1390

SPECrate®2017\_int\_peak = 1420

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Sep-2024

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd\_rate\_aocc500\_znver5\_A\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-20 04:34:31-0500.

Report generated on 2024-12-18 18:21:34 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.