



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

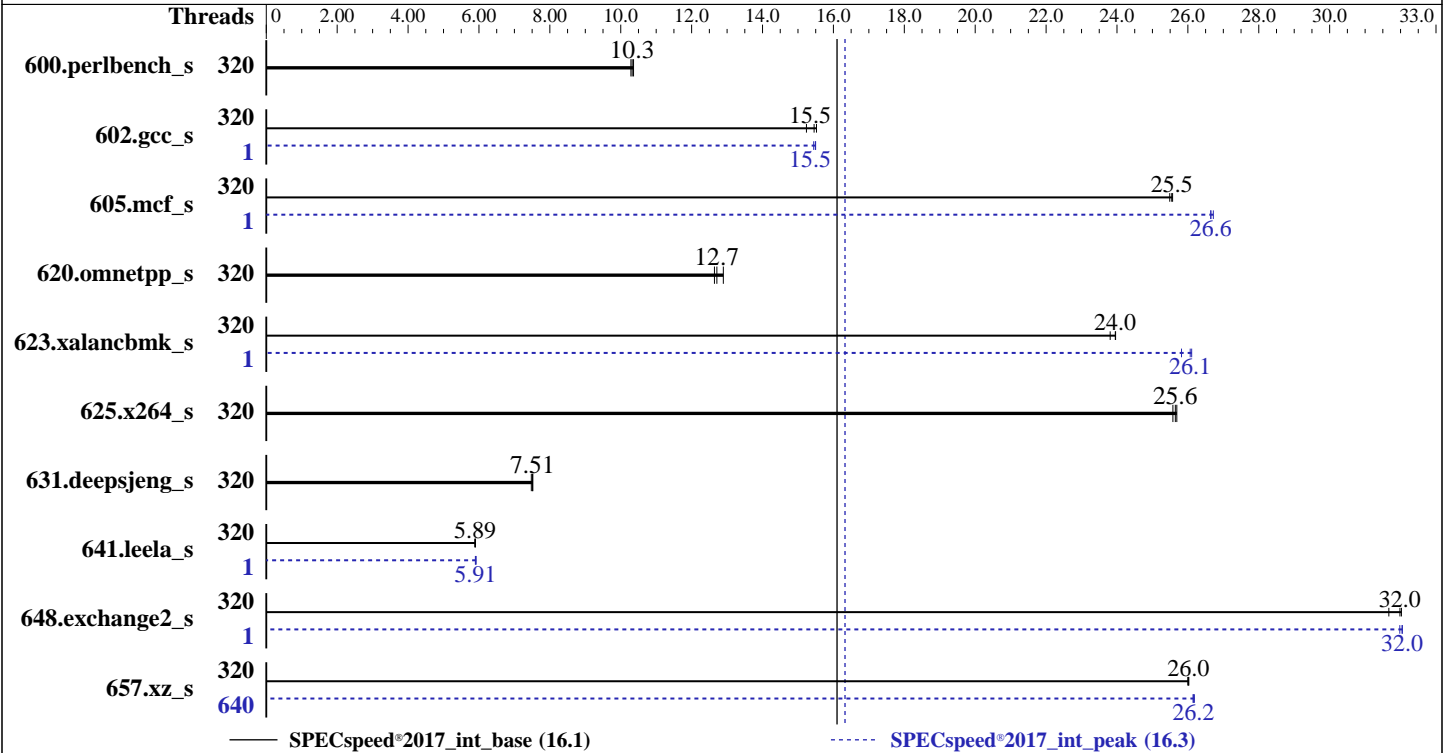

Hardware

CPU Name: AMD EPYC 9845
 Max MHz: 3700
 Nominal: 2100
 Enabled: 320 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip,
 32 MB shared / 16 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version KAE131A 5.30 released Oct-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	320	173	10.3	<u>172</u>	<u>10.3</u>	171	10.4	320	173	10.3	<u>172</u>	<u>10.3</u>	171	10.4
602.gcc_s	320	261	15.2	257	15.5	<u>258</u>	<u>15.5</u>	1	<u>257</u>	<u>15.5</u>	258	15.4	257	15.5
605.mcf_s	320	185	25.6	<u>185</u>	<u>25.5</u>	185	25.5	1	177	26.7	<u>177</u>	<u>26.6</u>	177	26.6
620.omnetpp_s	320	<u>128</u>	<u>12.7</u>	129	12.6	126	12.9	320	<u>128</u>	<u>12.7</u>	129	12.6	126	12.9
623.xalancbmk_s	320	<u>59.2</u>	<u>24.0</u>	59.1	24.0	59.5	23.8	1	54.9	25.8	54.3	26.1	<u>54.4</u>	<u>26.1</u>
625.x264_s	320	<u>68.8</u>	<u>25.6</u>	69.0	25.6	68.7	25.7	320	<u>68.8</u>	<u>25.6</u>	69.0	25.6	68.7	25.7
631.deepsjeng_s	320	192	7.48	191	7.52	<u>191</u>	<u>7.51</u>	320	192	7.48	191	7.52	<u>191</u>	<u>7.51</u>
641.leela_s	320	289	5.90	290	5.88	<u>290</u>	<u>5.89</u>	1	289	5.90	<u>289</u>	<u>5.91</u>	288	5.92
648.exchange2_s	320	91.8	32.0	92.8	31.7	<u>91.9</u>	<u>32.0</u>	1	91.9	32.0	91.7	32.1	<u>91.8</u>	<u>32.0</u>
657.xz_s	320	<u>238</u>	<u>26.0</u>	238	26.0	238	26.0	640	236	26.1	236	26.2	<u>236</u>	<u>26.2</u>

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-639"

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "640"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-639"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS2

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Nov 26 16:23:50 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 254 (254.10+suse.84.ge8d77af424)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `sysctl`
16. `/sys/kernel/mm/transparent_hugepage`
17. `/sys/kernel/mm/transparent_hugepage/khugepaged`
18. OS release
19. Disk information
20. `/sys/devices/virtual/dmi/id`
21. `dmidecode`
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
16:23:50 up 4 min, 1 user, load average: 0.74, 0.62, 0.31
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3092067
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 3092067
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 16.1

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Date: Nov-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.233/templogs/preenv.intspeerd.233.0.log --lognum 233.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9845 160-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101021
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 160
siblings       : 320
2 physical ids (chips)
640 processors (hardware threads)
physical id 0: core ids 0-159
physical id 1: core ids 0-159
physical id 0: apicids 0-319
physical id 1: apicids 512-831

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                640
On-line CPU(s) list:   0-639
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9845 160-Core Processor
BIOS Model name:      AMD EPYC 9845 160-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    160
Socket(s):             2
Stepping:              0
Frequency boost:       enabled
CPU(s) scaling MHz:    72%
CPU max MHz:           2100.0000

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

CPU min MHz:          1500.0000
BogoMIPS:             4193.48
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                    xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                    nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                    pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
                    avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                    movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                    flush_lli debug_swap
Virtualization:      AMD-V
L1d cache:          15 MiB (320 instances)
L1i cache:          10 MiB (320 instances)
L2 cache:           320 MiB (320 instances)
L3 cache:           640 MiB (20 instances)
NUMA node(s):       4
NUMA node0 CPU(s): 0-79,320-399
NUMA node1 CPU(s): 80-159,400-479
NUMA node2 CPU(s): 160-239,480-559
NUMA node3 CPU(s): 240-319,560-639
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	15M	12	Data	1	64	1	64
L1i	32K	10M	8	Instruction	1	64	1	64
L2	1M	320M	16	Unified	2	1024	1	64
L3	32M	640M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-79,320-399

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

node 0 size: 192836 MB
node 0 free: 192046 MB
node 1 cpus: 80-159,400-479
node 1 size: 193494 MB
node 1 free: 192516 MB
node 2 cpus: 160-239,480-559
node 2 size: 193494 MB
node 2 free: 193088 MB
node 3 cpus: 240-319,560-639
node 3 size: 193217 MB
node 3 free: 192816 MB
node distances:
node  0  1  2  3
  0:  10  12  32  32
  1:  12  10  32  32
  2:  32  32  10  12
  3:  32  32  12  10

```

```

9. /proc/meminfo
   MemTotal:      791595976 kB

```

```

10. who -r
    run-level 3 Nov 26 16:20

```

```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target  Status
    multi-user      running

```

```

12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                    kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                    systemd-pstore wickd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                    firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                    kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                    serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                    systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
                    systemd-timesyncd
    generated       ntp_sync
    indirect        systemd-userdbd wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=7b8fe170-8cd6-4f33-a048-ee31798eab65
    splash=silent
    mitigations=auto
    quiet
    security=apparmor

```

```

14. cpupower frequency-info
    analyzing CPU 325:

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

current policy: frequency should be within 1.50 GHz and 2.10 GHz.
The governor "ondemand" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       btrfs 444G 117G 325G  27% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Product: ThinkSystem SR665 V3
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

14x SK Hynix HMC888AHBRA471N 32 GB 2 rank 6400, configured at 6000
3x SK Hynix HMC888AHBRA472N 32 GB 2 rank 6400, configured at 6000
7x SK Hynix HMC888AHBRA478N 32 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: KAE131A-5.30
BIOS Date: 10/16/2024
BIOS Revision: 5.30
Firmware Revision: 54.2

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: basepeak = yes

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.10 GHz, AMD EPYC 9845)

SPECspeed®2017_int_base = 16.1

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-26 03:23:50-0500.

Report generated on 2024-12-18 18:26:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.