



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

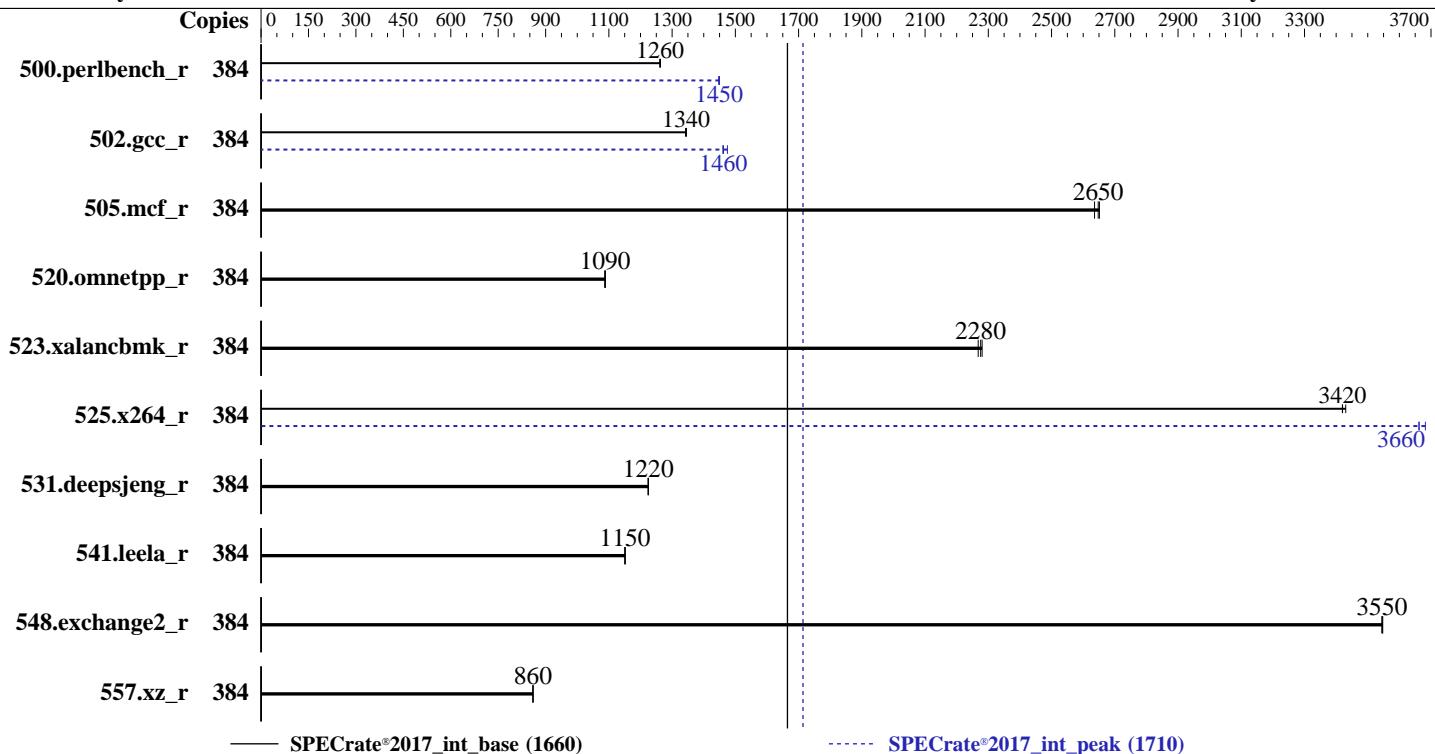

Hardware

CPU Name: Intel Xeon Platinum 8468H
 Max MHz: 3800
 Nominal: 2100
 Enabled: 192 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Compiler: 5.14.0-70.13.1.el9_0.x86_64
 C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.02.02.05 released Oct-2024
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECCrate®2017_int_base = 1660

SPECCrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Date: Nov-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	485	1260	484	1260	484	1260	384	422	1450	422	1450	422	1450	422	1450
502.gcc_r	384	405	1340	405	1340	404	1350	384	372	1460	369	1470	372	1460	372	1460
505.mcf_r	384	234	2650	235	2640	234	2650	384	234	2650	235	2640	234	2650	234	2650
520.omnetpp_r	384	463	1090	464	1090	463	1090	384	463	1090	464	1090	463	1090	463	1090
523.xalancbmk_r	384	178	2280	179	2270	178	2280	384	178	2280	179	2270	178	2280	178	2280
525.x264_r	384	196	3430	197	3420	197	3420	384	184	3660	184	3660	183	3680	183	3680
531.deepsjeng_r	384	359	1220	359	1220	359	1220	384	359	1220	359	1220	359	1220	359	1220
541.leela_r	384	552	1150	552	1150	553	1150	384	552	1150	552	1150	553	1150	553	1150
548.exchange2_r	384	284	3550	284	3550	284	3550	384	284	3550	284	3550	284	3550	284	3550
557.xz_r	384	482	860	482	860	482	860	384	482	860	482	860	482	860	482	860

SPECCrate®2017_int_base = 1660

SPECCrate®2017_int_peak = 1710

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Nov 29 20:16:51 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
20:16:52 up 21 min, 1 user, load average: 0.01, 0.00, 0.00
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 20:14 28.00s 1.16s 0.09s -bash

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Date: Nov-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (i) 4124863
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124863
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 384 -c ic2024.0.2-lin-sierraforest-rate-20231213.cfg
--define smt-on --define cores=192 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all intrate
runcpu --define default-platform-flags --copies 384 --configfile
ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size reframe intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.005/templogs/preenv.intrate.005.0.log --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000590
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 48
siblings         : 96
4 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
physical id 2: apicids 256-351
physical id 3: apicids 384-479
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8468H
BIOS Model name: Intel(R) Xeon(R) Platinum 8468H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 4
Stepping: 8
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
       nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
       vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
       x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
       abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
       intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
       flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms
       invpcid cq_mrdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
       clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaved xgetbv1
       xsaves cq_mllc cq_moccup_llc cq_mmbm_total cq_mmbm_local split_lock_detect
       avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pkru
       ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
       tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
       enqcmd fsrm md_clear serialize tsxlentrk pconfig arch_lbr avx512_fp16
       amx_tile flush_ll1d arch_capabilities
Virtualization: VT-x
L1d cache: 9 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 420 MiB (4 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0-11,192-203
NUMA node1 CPU(s): 12-23,204-215
NUMA node2 CPU(s): 24-35,216-227
NUMA node3 CPU(s): 36-47,228-239
NUMA node4 CPU(s): 48-59,240-251
NUMA node5 CPU(s): 60-71,252-263
NUMA node6 CPU(s): 72-83,264-275
NUMA node7 CPU(s): 84-95,276-287
NUMA node8 CPU(s): 96-107,288-299
NUMA node9 CPU(s): 108-119,300-311
NUMA node10 CPU(s): 120-131,312-323
NUMA node11 CPU(s): 132-143,324-335
NUMA node12 CPU(s): 144-155,336-347
NUMA node13 CPU(s): 156-167,348-359
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Date: Nov-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

NUMA node14 CPU(s):	168-179,360-371
NUMA node15 CPU(s):	180-191,372-383
Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)
node 0 cpus: 0-11,192-203
node 0 size: 63739 MB
node 0 free: 61989 MB
node 1 cpus: 12-23,204-215
node 1 size: 64506 MB
node 1 free: 64214 MB
node 2 cpus: 24-35,216-227
node 2 size: 64506 MB
node 2 free: 64138 MB
node 3 cpus: 36-47,228-239
node 3 size: 64506 MB
node 3 free: 64209 MB
node 4 cpus: 48-59,240-251
node 4 size: 64506 MB
node 4 free: 64210 MB
node 5 cpus: 60-71,252-263
node 5 size: 64506 MB
node 5 free: 64204 MB
node 6 cpus: 72-83,264-275
node 6 size: 64506 MB
node 6 free: 64220 MB
node 7 cpus: 84-95,276-287
node 7 size: 64506 MB
node 7 free: 64212 MB
node 8 cpus: 96-107,288-299
node 8 size: 64506 MB
node 8 free: 64168 MB
node 9 cpus: 108-119,300-311
node 9 size: 64506 MB
node 9 free: 63425 MB
node 10 cpus: 120-131,312-323
node 10 size: 64506 MB
node 10 free: 64148 MB
node 11 cpus: 132-143,324-335
node 11 size: 64506 MB
node 11 free: 64167 MB
node 12 cpus: 144-155,336-347

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Date: Nov-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 12 size: 64506 MB
node 12 free: 64191 MB
node 13 cpus: 156-167,348-359
node 13 size: 64506 MB
node 13 free: 64208 MB
node 14 cpus: 168-179,360-371
node 14 size: 64506 MB
node 14 free: 64196 MB
node 15 cpus: 180-191,372-383
node 15 size: 64441 MB
node 15 free: 64140 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
  1: 12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
  2: 12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
  3: 12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
  4: 21 21 21 21 10 12 12 21 21 21 21 21 21 21 21 21
  5: 21 21 21 21 12 10 12 21 21 21 21 21 21 21 21 21
  6: 21 21 21 21 12 12 10 12 21 21 21 21 21 21 21 21
  7: 21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
  8: 21 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21
  9: 21 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21
 10: 21 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21
 11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
 12: 21 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12
 13: 21 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12
 14: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12
 15: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1056026860 kB
```

```
-----  
10. who -r  
run-level 5 Nov 29 19:56
```

```
-----  
11. Systemd service manager version: systemd 250 (250-6.e19_0)  
Default Target Status  
graphical running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        ModemManager NetworkManager-dispatcher NetworkManager-wait-online  
                accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker firewalld gdm  
                getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt  
                low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname  
                nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd  
                rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control  
                systemd-network-generator udisks2 upower vgaauthd vmtoolsd  
enabled-runtime    systemd-remount-fs  
disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown  
                canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower  
                cups-browsed dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit ipruleupdate  
                iscsid iscsiuiio kpatch kvm_stat ledmon man-db-restart-cache-update nftables  
                nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon  
                rdisc rhcd rhsm rhsm-facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
indirect      spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
    root=/dev/mapper/rhel-root
    ro
    crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap
    rhgb
    quiet

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag               1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan         4096
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 201G 15G 186G 8% /home

20. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 5885H V7
Product Family: EagleStream

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.02.05
BIOS Date: 10/17/2024

Compiler Version Notes

=====| 502.gcc_r(peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====| 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====| 502.gcc_r(peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

Test Date: Nov-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Date: Nov-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Peak Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488

Test Date: Nov-2024

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-29 07:16:51-0500.

Report generated on 2024-12-18 18:29:29 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.